
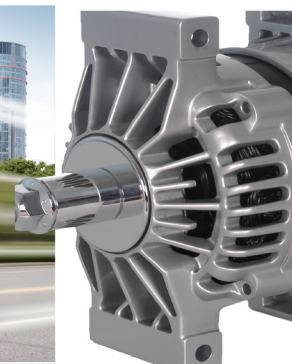
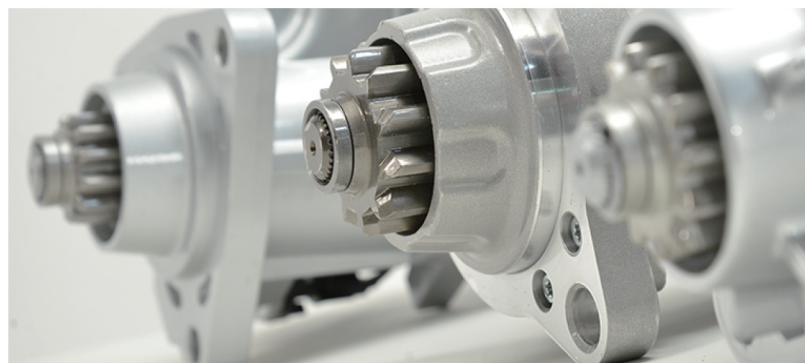


商用车起发电机

目录

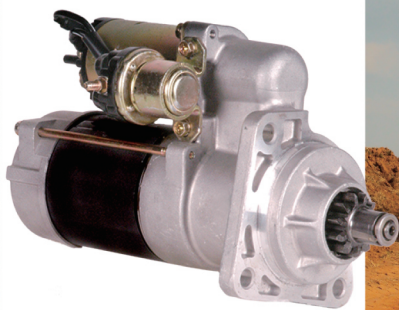

请注意：使用竞争对手的部件号进行交换不是正面标识。某些竞争对手的零件号交换应大众要求提供，但绝对相关性是不可能的。再制造商或出版商对因依赖竞争对手的部件号进行识别而可能产生的间接或其他损害不承担任何责任。

免责声明：此处包含的信息是从可靠来源获得的，并且在可确定的范围内是准确的。但是，对于本目录的准确性，不作任何明示或暗示的保证，出版商对任何损害不承担任何责任。接受本目录的条件是接受免责声明。

2014版权归 德科雷米国际公司所有。并保留所有权利。这些材料是受美国和国际保护版权法，不得复制、修改、分发或重新发布在任何未经德科雷米国际公司明确书面许可的表格。


本目录中列出的任何零件编号或制造公司名称仅供参考，绝不表示货物的来源。



说明	2
1.1 品牌历史和经营范围	
亚太区产品推荐	3
2.1 商用车起动机产品推荐	
2.2 商用车交流发电机产品推荐	
服务说明	7
起动机索引	11
4.1 按OE号索引	
4.2 交叉索引	
发电机索引	103
5.1 按OE号索引	
5.2 交叉索引	
电子目录	197
6.1 介绍电子目录中的备件索引	
6.2 宣传册和其他宣传物料下载方式	



品牌历史

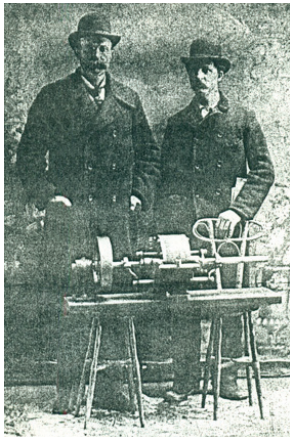


Frank & Perry Remy

125年来, Delco Remy产品一直是全球商用卡车、公共汽车和非公路应用的首选。

- 1896 • Frank和Perry Remy在印第安纳州安德森市创立了Remy电气公司
- 1907-1915 • 永磁发电机和直流发电机演变成自动起动机、发电机和点火装置
- 1916 • Remy电气和代顿工程技术实验室(Dayton Engineering Laboratories, 简称“DELCO”)成为联合汽车公司的组成部分
- 1918 • 联合汽车公司被通用汽车公司收购
- 1927-1994 • 德科雷米 (Delco-Remy) 成为世界上最大的旋转电机制造商
- 1994 • 旋转电动业务从通用汽车公司剥离出来, 成立了美国德科雷米有限公司
- 1995-2001 • 公司通过收购和供应新产品在全球范围内发展壮大
- 2002 • 德科雷米国际公司从德尔福(Delphi)获得汽车交流发电机技术、工程师和设备
- 2003 • 德科雷米首次为混合动力客车生产电动机
- 2004 • 公司从“德科雷米国际公司”更名为“雷米国际有限公司”
- 2015 • 博格华纳收购雷米国际
- 2023 • 博格华纳将专注于内燃机市场的业务部门分拆给了新公司Phinia, 涵盖德科雷米起动机和交流发电机产品等业务



1901



1927



1940s




1950s



1960s



1977

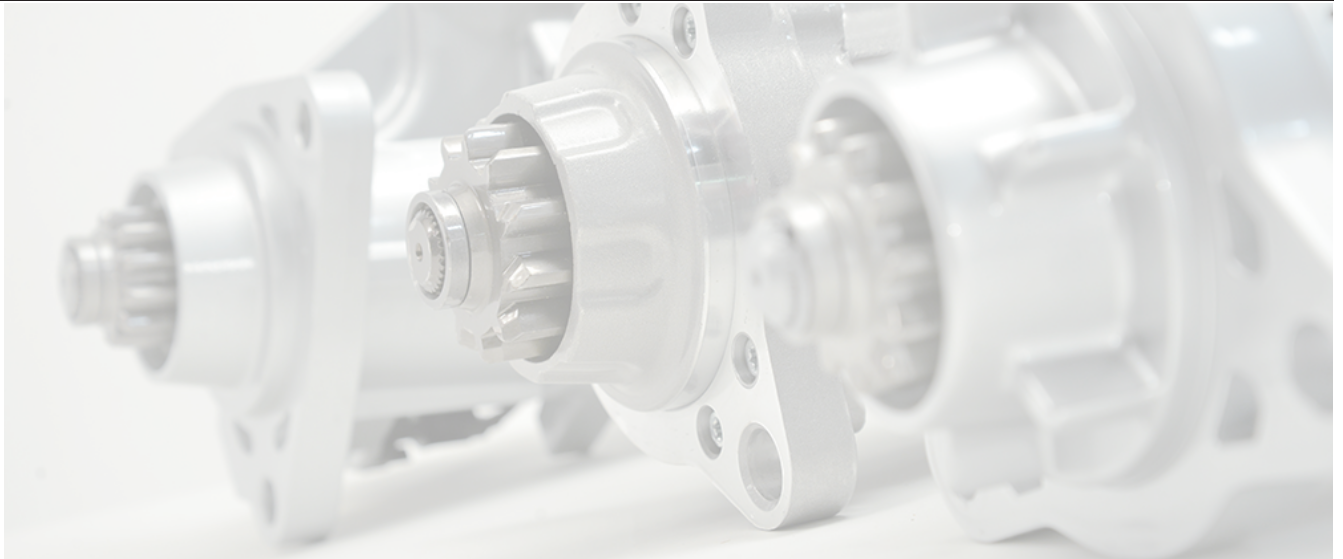

德科雷米商用车起动机

Delco Remy起动机专为在所有条件和环境下启动重型汽车和越野车而设计，可谓尽善尽美。可用的专有功能还可以保护起动机免受系统问题的影响，问题包括过度拖转、电池容量低、电压尖峰、高启动电路电阻或操作员误用等。



原始设备制造商依靠德科雷米为最新的整车设计提供优质创新的解决方案。

在售后市场，世界各地的经销商、仓储分销商和车队都相信我们的起动机能够提供卓越的启动功率和耐用性。

- 全面覆盖：适用于所有卡车、公共汽车、越野车和机车的完整产品组合。
- 可靠：供应的设备具有集成过度拖转保护（IOCP）功能（一种内置断路器，可保护起动机免受热损坏）。
- 电气软启动：小齿轮与齿圈啮合始终准确，从而提高了可靠性。
- 耐用：设备配有获得专利的内部电磁开关电磁开关（IMSS），可减少腐蚀和振动问题，同时延长使用寿命。

AP Popular Products



	38MT	39MT	150MT	42MT	50MT
Engine size	12 V 10.0L 24 V 12.0L	12V 15.0L 24V 16.0L	12V 16.0L 24V 18.0L	12V 14.8L 24V 16.0L	29.5L
System Voltage	12V/24V	12V/24V	12V/24V	12V/24V	12V/24V/32V/64V
Rotation	Clockwise	Clockwise	Clockwise	Clockwise Counterclockwise	Clockwise Counterclockwise
Mounting	SAE #1 SAE #3	12V SAE #1/#3 24V SAE #3	12V SAE #1/#3 24V SAE #3	SAE #1 SAE #3	SAE #3
Pinion	10 Tooth, 8-10 Pitch 11 Tooth, MOD 3 (Metric) 12 Tooth, 8-10 Pitch	11 Tooth, 6-8Pitch 12 Tooth, 8-10Pitch 12 Tooth, MOD3 (Metric)	11 Tooth, 6-8 Pitch 12 Tooth, 8-10Pitch 12 Tooth, MOD 3 (Metric)	11 Tooth, 6-8 Pitch 12 Tooth, 8-10Pitch 13 Tooth, 8-10Pitch 11 Tooth, MOD 3 (Metric) 12 Tooth, MOD 3 (Metric)	11 Tooth, 6-8 Pitch 12 Tooth, 8-10Pitch 12 Tooth, MOD 3 (Metric)
Peak Output	12V 4.3 kW 24V 7.8 kW	12V 7.3 kW 24V 9.0kW	12V 7.3 kW 24V 9.0kW	12V 7.3 kW 24V 8.0 kW	12 Volt 8.5 kW 24 Volt 9.0 kW 32 Volt 13.0 kW 64 Volt 12.0 kW
Weight	10.0 kg	14 kg	14.4 kg	26.3 kg	35.8 kg
Frame Diameter	100 mm	114 mm	115 mm	130 mm	142 mm
Overall length		358 mm		496.0 mm	518.2 mm
Feature	Electrical Soft Start Overrunning Clutch Over-Crank Protection	Electrical Soft-Start Overrunning Clutch Rotatable Flange Over-Crank Protection Jump-Start Protection (meets SAE J1493)	Electrical Soft-Start, Overrunning Clutch Longer duration	Two-piece rotatable drive housing (12 or 24 positions) Positive Engagement Rubber Shock Absorber Jumpstart Protection (meets SAE J1493) Over-Crank Protection	Rotatable Drive Housing Positive Engagement Rubber Shock Absorber Jump-Start Protection (meets SAE J1493)
Popular SKU	8200072 8200005	8200308 8200330 8200435 8200434 8200433 8201100	61014400 61015901 61015900 61017311	10478998 1990483	10479339 10479343 10479328



德科雷米商用车交流发电机



对全球商用车和越野车行业来说，德科雷米交流发电机是质量卓越、效能更高、以及节油显著的代名词。

从活动部件更少的无刷设计、到改善电池充电时间的遥感，德科雷米技术都是首屈一指的。我们将继续利用我们的经验，为原始设备和售后市场合作伙伴提供创新的解决方案，以应对当今汽车电气系统的挑战。


- 完整的产品组合：从70安培到450安培（12和24伏）。
- 高效：设备重量更轻，采用我们专有的定子设计，使用的发动机马力更少，可大大节省燃油。
- 耐用：设备采用无刷设计，活动部件更少，意味着磨损更少、使用寿命更长。
- 出色表现：设备采用遥感技术，可将电池充电时间减少50%。

AP Popular Products



	22SI	24SI	28SI	36SI	55SI
Model type	Brush	Brush	Brush	Brushless	Brushless
Performance Output	12 V 150Amps	12 V 160Amps 24 V 70Amps	12 V 160, 180, & 200Amps 24 V 110Amps	12 Volts 170 Amps (100 Amps at idle) 24 Volts 105 Amps	12 Volts 430 Amps 24 Volts 250 & 275Amps
Maximum Speed	10,000 RPM C 12,000 RPM I	10,000 RPM C 12,000 RPM I	10,000 RPM C 12,000 RPM I	8,000 RPM C 10,000 RPM I	8,000 RPM C 9,000 RPM I
Rotation	Clockwise	Clockwise	Clockwise	Clockwise Counterclockwise	Clockwise
Temperature Rating	93°C / 200°F	105°C / 221°F	125°C / 257°F 125°C / 257°F	125°C / 257°F	12V 430A 93°C / 200°F 24V 250A 125°C / 257°F 24V 275A 110°C / 230°F
Mounting	J180 Hinge Pad	J180 Hinge Pad	J180 Short Hinge J180 Long Hinge Pad	J180 Short Hinge Quad Pad	Pad
Polarity	Negative Ground	Negative Ground	Negative Ground	Negative Ground (Standard) Isolated Ground (Available)	Negative Ground
Efficiency	57%	12 V 62% 24 V 72%	12 Volt 66% 24 Volt 76%	68%	12 Volts 73% 24 Volts 80%
Weight	6.4 kg	7.7 kg	8.5 kg	11.5 kg	19.6 kg
Stator Diameter	144 mm	144 mm	144 mm	152 mm	175 mm
Length	217 mm	234.1 mm	235.6 mm	263 mm	285.9 mm
Remote sense				Optional	Standard
Popular SKU	19020310	8600388 8600017	8600467 8600468 8600469 8600764	8600110 8600496 8600497	61006082 61006083 8600564

21SI、22SI、23SI
以及大多数里士耐交流发电机

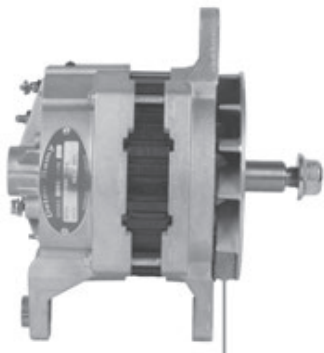

外风扇

24SI和28SI交流发电机



内置双风扇(DIF款)

1


内置双风扇交流发电机更换带有外风扇的交流发电机时，如果有内置风扇交流发电机，请不要从原装样机中取出外风扇并应用于内置风扇交流发电机。否则将导致皮带轮和皮带错位。

内置双风扇
(DIF款)

33SI, 34SI, 35SI, 36SI, 40SI

短焊盘型式

22SI, 23SI, 24SI, 28SI

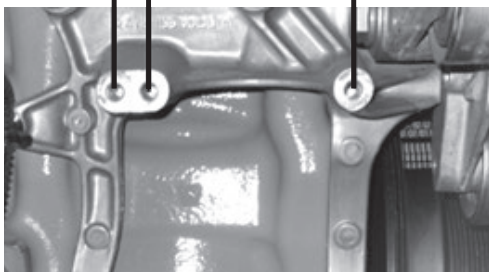


2 焊盘安装和发动机安装支架

使用既有发动机安装支架孔，轻松从竞争机型升级。从Delco Remy短焊盘安装款交流发电机到高品质无刷长焊盘安装款，也都可以做到这一点。

3 无皮带轮 替换装交流发电机没有皮带

Jump Start Protection Shield

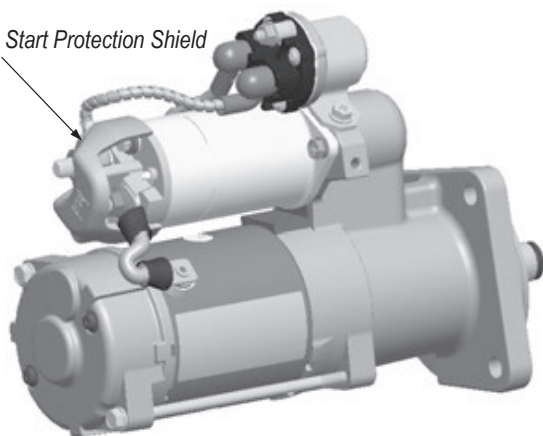

4 带跨接启动保护的28MT起动机

如果原装起动机在起动机电磁开关端子上安装了跨接启动保护罩，建议将该保护罩移到替换机型上。或者，从正规的Delco Remy分销商或经销商处购买保护罩部件（零件号10473386）。

5 起动机整流器端可旋转180度


与替换装起动机不同的是，原装起动机的整流器端（CE）可以旋转180度。重要提示：确保端子连接正确，OEM布线线束长度合适。

6 原装起动机接地端子在机座内，替换装起动机端子在背面

原装起动机的接地端子位于起动机座中。替换机型的接地端子位于起动机的背面。发现这种差异很重要。确保起动机接地电缆在替换装起动机上正确接地。


7 带跨接启动保护的 37MT/41MT/42MT起动机


如果原装起动机在起动机电磁开关端子上安装了跨接启动保护罩，建议将该保护罩移到替换机型上。或者从正规的Delco Remy分销商或经销商处购买保护罩部件（零件号10456430）。

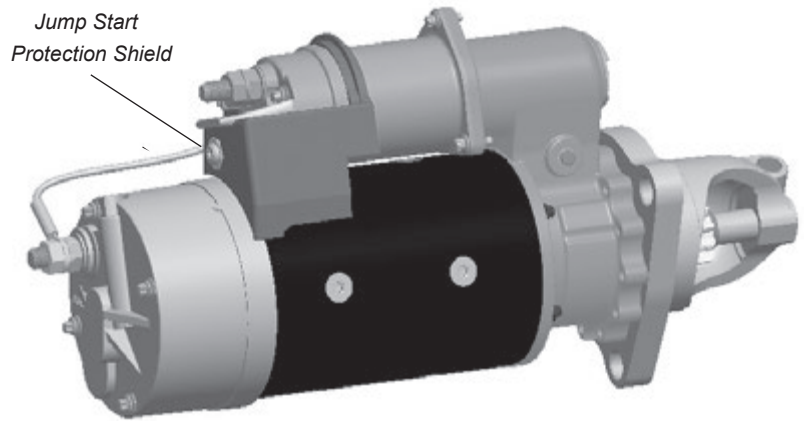

8 起动机安装孔的差异

替换装起动机的安装孔直径可能比原装起动机的稍大。建议在替换装起动机的每个安装孔上使用硬化垫圈（5级或更好）。

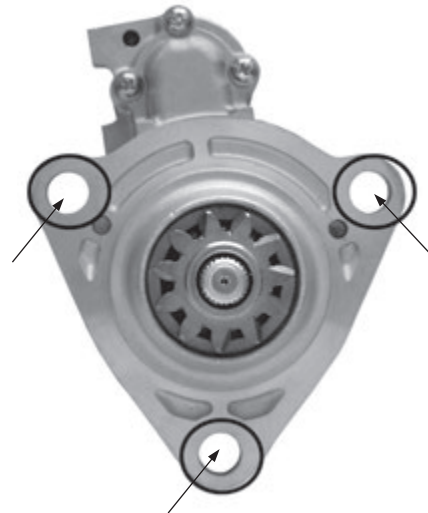

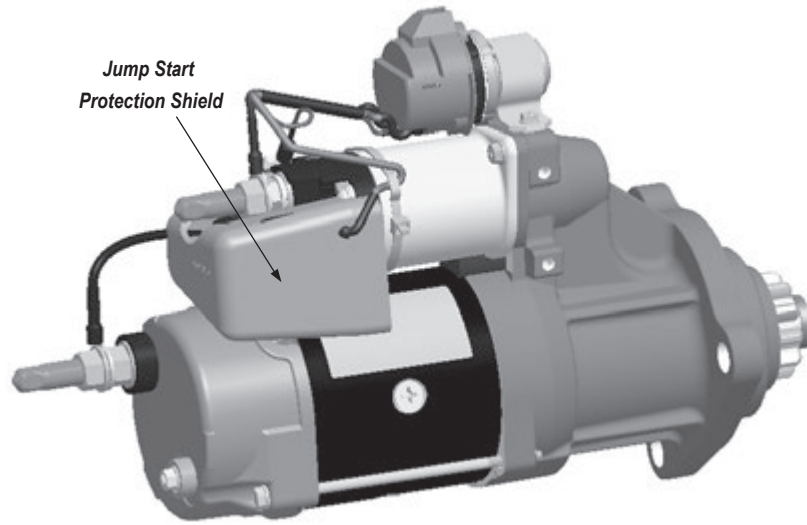

9 带跨接启动保护的39MT起动机

如果原装起动机在起动机电磁开关端子上安装了跨接启动保护罩，建议将该保护罩移到替换机型上。或者，从正规的Delco Remy分销商或经销商处购买保护罩部件（零件号10511411）。

10 替换装机型无OCP

替换装起动机没有OCP（过度拖转保护）---原装起动机有此功能。


11 11IMS开关位置

替换装起动机上的IMS开关可能需要重新调整位置。为了给客户提供操作弹性，替换装起动机配备了6组安装孔，旨在为调整IMS开关位置时提供最大的操作弹性。

12 电磁开关位置略有不同

替换装起动机上的电磁开关位置不同于原装机型上的电磁开关位置。替换装起动机电机配备了可旋转法兰设计，需要重新调整电磁开关的位置（通过拆下法兰前面的6个螺栓）并旋转法兰，使电磁开关处于与原装机型相同的位置。

13 有OCP ¹³替换装部件具有OCP（过度拖转保护）

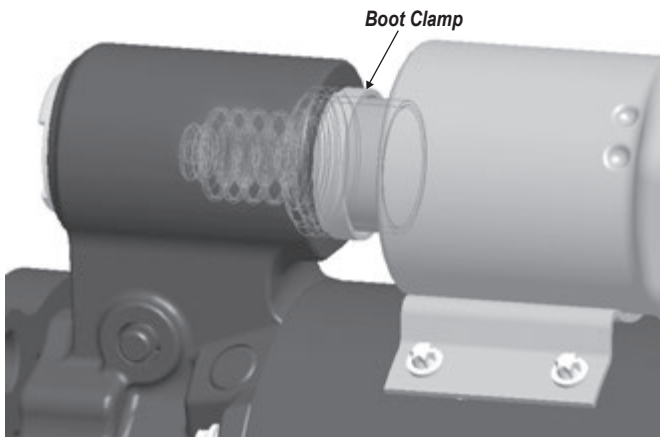

14 起动机防尘罩卡箍


原装起动机在电磁开关上安装了一个防尘罩卡箍，以改善OEM认为必要的密封性。如果替换装选项不提供这种防尘罩卡箍密封部件，请酌情考虑应用和操作环境。

15 电磁开关位置略有不同

替换装起动机电磁开关的位置与原装机型略有不同（15度以内）。需要确认起动机装配是否安装正确。

16 带跨接启动保护的50MT起动机

如果原装起动机在起动机电磁开关端子上安装了跨接启动保护罩，建议将该保护罩移到替换机型上。或者，从正规的Delco Remy分销商或经销商处购买保护罩部件（零件号10489059）。

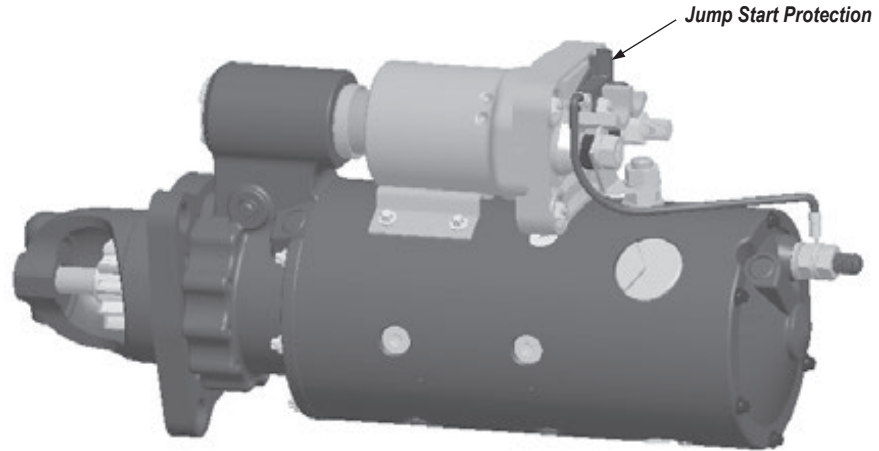

17 不可旋转法兰

替换部件有一个不可旋转的法兰。

18 18无IMS开关

替换部件没有配备IMS开关。

19 有IMS开关

替换部件配有IMS开关

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CARGO (EUROPE)	110999	1993796/1990453/ 1990413/1990366			42MT	24	8/10	12	SAE 3
CARGO (EUROPE)	111000	1990418			42MT	24	6/8	11	SAE 3
CARGO (EUROPE)	111255	1113274			28MT	12	8/10	10	SAE 1
CARRIER TRANSICOLD	20-45-1263	93584			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	20-45-1312	93550			REFRIGERATION/ AUX	12	0	15	0
CARRIER TRANSICOLD	20-45-1671	93584			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	20-45-1688	93591			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	20-45-1718	93550			REFRIGERATION/ AUX	12	0	15	0
CARRIER TRANSICOLD	20-45-1993	93584			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	20-45-2323	93591			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	20-45-2325	93584			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-34885-00	93598			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-35465	93594			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-35465-00	93594			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-37640	93549			REFRIGERATION/ AUX	12	0	11	0
CARRIER TRANSICOLD	25-37640-00	93549			REFRIGERATION/ AUX	12	0	11	0
CARRIER TRANSICOLD	25-37725-00	93549			REFRIGERATION/ AUX	12	0	11	0
CARRIER TRANSICOLD	25-38750	93549			REFRIGERATION/ AUX	12	0	11	0
CARRIER TRANSICOLD	25-38750-00	93549			REFRIGERATION/ AUX	12	0	11	0
CARRIER TRANSICOLD	25-39135	93588			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39135-00	93588			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39291-00	93590			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39316-00	93589			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39316-01	93589			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39476-00	93607			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39476-00SV	93607			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39587-00	93590			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39587-00SV	93590			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39610-00SV	93600			REFRIGERATION/ AUX	12	0	9	0
CARRIER TRANSICOLD	25-39880-00SV	93600			REFRIGERATION/ AUX	12	0	9	0

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CASE	104452A1		61010421		MISC	12	0	13	0
CASE	104452A2		61010421		MISC	12	0	13	0
CASE	104452A2R		61010421		MISC	12	0	13	0
CASE	193432A1		61007504		MISC	12	0	10	0
CASE	193432A1R		61007504		MISC	12	0	10	0
CASE	193432A2		61007504		MISC	12	0	10	0
CASE	193432A2R		61007504		MISC	12	0	10	0
CASE	1987559C1		61010421		MISC	12	0	13	0
CASE	86982709		61010421		MISC	12	0	13	0
CASE	86982709R		61010421		MISC	12	0	13	0
CASE	87350916		61010421		MISC	12	0	13	0
CASE	87413500		61007504		MISC	12	0	10	0
CASE	87413500R		61007504		MISC	12	0	10	0
CASE	A170745		61010421		MISC	12	0	13	0
CASE	A170746		61010421		MISC	12	0	13	0
CASE	A170756		61010421		MISC	12	0	13	0
CASE	AR170746		61010421		MISC	12	0	13	0
CASE NEW HOLLAND	20-2383T91			8200308	39MT	12	6/8	11	SAE 3
CASE NEW HOLLAND	20-2384T91			8200308	39MT	12	6/8	11	SAE 3
CASE NEW HOLLAND	87024976	19011400			29MT	12	10/12	10	SAE 1
CASE NEW HOLLAND	87366159	8200014			29MT	12	8/10	10	SAE 1
CUMMINS	10457026		10461170		37MT	12	8/10	10	SAE 3
CUMMINS	195827			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	195828			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	195829			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	195830			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	195833			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	195834			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	2871255	8200289		8200308	39MT	12	6/8	11	SAE 3
CUMMINS	2871259			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUMMINS	2895340			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	2899588			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	3017393	10478800			50MT	24	6/8	11	SAE 3
CUMMINS	3021034			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3021034RX			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3021035			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3021038RX	10479339	10461739		50MT	24	6/8	11	SAE 3
CUMMINS	3102919			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	3103305			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	3103916			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	3103952			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	3171099	61003971			50MT	24	6/8	11	SAE 3
CUMMINS	3255868	10478998			42MT	24	6/8	11	SAE 3
CUMMINS	3283813		61007504		MISC	12	0	10	0
CUMMINS	3286424			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	3603863RX			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3603895RX	1990483		8200308	42MT	12	6/8	11	SAE 3
CUMMINS	3604232RX	1990483		8200308	42MT	12	6/8	11	SAE 3
CUMMINS	3604322RX			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3604323RX			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	3604483RX		10461089		37MT	12	8/10	12	SAE 3
CUMMINS	3604484RX			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	3604654		10465043		28MT	12	10/12	10	SAE 1
CUMMINS	3604654RX		10465043		28MT	12	10/12	10	SAE 1
CUMMINS	3604655RX	10479339			50MT	24	6/8	11	SAE 3
CUMMINS	3604658RX	10479342			50MT	24	6/8	11	SPECIAL
CUMMINS	3604673RX		10461058		37MT	12	8/10	10	SAE 3
CUMMINS	3604680RX	10479328			50MT	12	6/8	11	SAE 3
CUMMINS	3610942			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	3632273	10479339			50MT	24	6/8	11	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUMMINS	3636818	61003970			50MT	24	6/8	11	SAE 3
CUMMINS	3636819	61003971			50MT	24	6/8	11	SAE 3
CUMMINS	3651891	61003970			50MT	24	6/8	11	SAE 3
CUMMINS	3651892	61003971			50MT	24	6/8	11	SAE 3
CUMMINS	3675148RX	93584			REFRIGERATION/ AUX	12	0	9	0
CUMMINS	3675153RX	93549			REFRIGERATION/ AUX	12	0	11	0
CUMMINS	3675166RX		10461110		37MT	12	8/10	10	SAE 1
CUMMINS	3675167RX		10461094		37MT	12	8/10	10	SAE 1
CUMMINS	3675173RX		10465150		28MT	12	10/12	10	SAE 1
CUMMINS	3675190RX		10461169		37MT	12	8/10	12	SAE 3
CUMMINS	3675205RX	93550			REFRIGERATION/ AUX	12	0	15	0
CUMMINS	3675206RX	93594			REFRIGERATION/ AUX	12	0	9	0
CUMMINS	3675245		61007504		MISC	12	0	10	0
CUMMINS	3675245RX		61007504		MISC	12	0	10	0
CUMMINS	3904466		61010421		MISC	12	0	13	0
CUMMINS	3906960		61010421		MISC	12	0	13	0
CUMMINS	3907622			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	3910645			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	3910646	1993796			42MT	24	8/10	12	SAE 3
CUMMINS	3916854RX		10465043		28MT	12	10/12	10	SAE 1
CUMMINS	3918376		10465043		28MT	12	10/12	10	SAE 1
CUMMINS	3920403		61010421		MISC	12	0	13	0
CUMMINS	3920617		10461170		37MT	12	8/10	10	SAE 3
CUMMINS	3920643		61010421		MISC	12	0	13	0
CUMMINS	3926960		61010421		MISC	12	0	13	0
CUMMINS	3936150	1993940			42MT	24	8/10	12	SAE 3
CUMMINS	3957586		61010421		MISC	12	0	13	0
CUMMINS	3957589		61007504		MISC	12	0	10	0
CUMMINS	3957594		61010421		MISC	12	0	13	0
CUMMINS	3964427		61010421		MISC	12	0	13	0

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUMMINS	3964428		61010421		MISC	12	0	13	0
CUMMINS	3964432		61010421		MISC	12	0	13	0
CUMMINS	3965284RX	8200072			38MT	24	8/10	12	SAE 3
CUMMINS	3971610		61007503		MISC	12	0	10	0
CUMMINS	3971613		61007503		MISC	12	0	10	0
CUMMINS	3971615		61007503		MISC	12	0	10	0
CUMMINS	3978387	8200005			38MT	12	8/10	12	SAE 3
CUMMINS	4081235	10479343			50MT	24	6/8	11	SAE 3
CUMMINS	5284077			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284078			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284079			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284080			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284081			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284082			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5284083			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	5284084			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	5284085			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	5284086			8200330	39MT	24	6/8	11	SAE 3
CUMMINS	5284100			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	5284102			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	5284103			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	5284104			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	5284105			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	5284106			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	5284107			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	5284108			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	5284109			8200435	39MT	24	8/10	12	SAE 3
CUMMINS	5367754			8200308	39MT	12	6/8	11	SAE 3
CUMMINS	5367765			8200433	39MT	12	8/10	12	SAE 3
CUMMINS	5367773			8200330	39MT	24	6/8	11	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUMMINS	5367775			8200971	39MT	12	6/8	11	SAE 1
CUMMINS	61010421		61010421		MISC	12	0	13	0
CUMMINS	90032414	8200077			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	00074299	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	00112173	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	0051510001	10479346			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	01990269	10479339			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	01990437	10478998			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	01990483	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	01990489	1990489			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	01993788	1993788			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461054RMAN			8200330	39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461058RMAN		10461058		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	10461089RM		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	10461089RMAN		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	10461094X		10461094		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461098RMAN		10461098		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461110RMAN		10461110		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461160RMAN		10461160		50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461161RMAN		10461161		50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461169RMAN		10461169		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	10461171RMAN		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	10461225RMAN		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461277RMAN		10461277		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	10461282RMAN		10461282		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	10461298RMAN		10461298		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461416RMAN		10461416		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461431RMAN		10461431		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	10461454RMAN		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	10461481RMAN		10461481		28MT	12	10/12	10	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	10461493RMAN		10461493		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461739RMAN		10461739		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461744RMAN		10461744		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10461765RMAN		10461765		29MT	NULL	NULL	NULL	0
CUSTOMER PART NUMBER	1046176838MT		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461768RMAN		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	10461770RMAN		10461770		29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	10461772RMAN		10461772		29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	10465043RMAN		10465043		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	10465150RMAN		10465150		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	10465239RMAN		10465239		28MT	12	8/10	10	0
CUSTOMER PART NUMBER	10479339P	10479339			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	10479343P	10479343			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	1454651	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	1967561	19011402/19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	21106315			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461058		10461058		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	2132-10461089		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10461094		10461094		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461098		10461098		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461110		10461110		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461160		10461160		50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461161		10461161		50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461169		10461169		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10461170		10461170		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	2132-10461171		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10461207		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461225		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461277		10461277		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10461282		10461282		41MT	12	8/10	12	SAE 1

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	2132-10461298		10461298		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461334			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461416		10461416		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461431		10461431		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	2132-10461454		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	2132-10461481		10461481		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-10461493		10461493		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461496		10461496		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	2132-10461738		10461738		50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461739		10461739		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10461765		10461765		29MT	NULL	NULL	NULL	0
CUSTOMER PART NUMBER	2132-10461768		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-10461770		10461770		29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-10461772		10461772		29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	2132-10461777			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10465043		10465043		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-10465150		10465150		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-10465239		10465239		28MT	12	8/10	10	0
CUSTOMER PART NUMBER	2132-10478812	10478812			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10478827	10478827			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478828	10478828			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478829	10478829			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478830	10478830			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478877	10479328			50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478998	10478998			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10478999	10478999			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10479010	10479010			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10479130	10479130			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10479228	10479228			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-10479283	10479283			41MT	12	MOD 3.00	11	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	2132-10479299	10479299			41MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	2132-10479323	10479323			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10479327	10479327			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10479339	10479339			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-10479342	10479342			50MT	24	6/8	11	SPECIAL
CUSTOMER PART NUMBER	2132-10479363	10479363			41MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1113274	1113274			28MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-19011400	19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-19011402	19011402			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-19011403	19011403			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	2132-19011407	19011407			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-19011409	19011409			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	2132-19011505			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-19011518			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-19011521			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-19011530	19011530			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-19011531	8200288			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-19026035	19026035			38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	2132-1990366	1990366			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1990406	1990406			42MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1990413	1990413			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1990418	1990418			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-1990453	1990453			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1990489	1990489			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-1990490	1990490			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-1993788	1993788			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-1993796	1993796			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-1993940	1993940			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200005	8200005			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200007	8200007			38MT	12	8/10	10	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	2132-8200055	8200055			41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	2132-8200068	8200068			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200075	8200075			38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	2132-8200076	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8200077	8200077			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8200078	8200078			38MT	24	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8200103	8200103			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	2132-8200235	8200235			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8200287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	2132-8200288	8200288		8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200289	8200289			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200290	8200290			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200291	8200291			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200297	8200297			29MT	24	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	2132-8200308			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200321	8200321			39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200330			8200330	39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8200433			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200434			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	2132-8200435			8200435	39MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200436	8200436			39MT	24	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	2132-8200468	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	2132-8200469	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8200570	8200570			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	2132-8200571	8200571			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8200612	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	2132-8201076	8201100			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8201100	8201100			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	2132-8300000		8300000		42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	2132-8300005		8300005		38MT	12	8/10	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	2132-8300024		8300024		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	2132-8300026		8300026		38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	2132-8300063		8300063		29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	21398109			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	21428511			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	21493892	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	21493893	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	21732551			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	21942887			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	21942888			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	22063553			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	22063554			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	22171432			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	2217432			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	22398213	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	22398215	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	22398216	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	22398217	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	22421152	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	22421153	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	22421158			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	22436640			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	22436651			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	2895341			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	3808594	8200078			38MT	24	8/10	10	SAE 1
CUSTOMER PART NUMBER	410-12130	19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	410-12154		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	410-12284			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	410-12290	8200005			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	410-12511	10479228			42MT	24	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	5034-M110R2603SE			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	61230359	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	7G-1-92	1993788			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	8200016P	8200016			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	82000287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	8200271P	8200972			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	8200290P	8200290			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8200308P			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8200326P	8200326			29MT	12	MOD 3.00	10	SAE 1
CUSTOMER PART NUMBER	8200330P			8200330	39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	8200434P			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	8200750P			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8201091P	8201091			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	8300000RMN	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8300001RMN		8300001		42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8300002RMAN		8300002		42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8300002RMN		8300002		42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	8300005RMAN		8300005		38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	8300024RMAN		8300024		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	8300026RMAN		8300026		38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	8300063RMAN		8300063		29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	90024059	19011402/19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	CH11441		10461744		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	D/R8200076	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DEC8200288	8200288			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DEL8300005		8300005		38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DER10479328	10479328			50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DER8200014	8200014			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DER8200287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DER8200290	8200290			39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DL 8200289	8200289			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461094		10461094		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461110		10461110		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461160		10461160		50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461161		10461161		50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461170		10461170		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DR 10461171		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10461225		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461282		10461282		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DR 10461416		10461416		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461481		10461481		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 10461493		10461493		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461496		10461496		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DR 10461738		10461738		50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461739		10461739		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461744		10461744		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10461768		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461770		10461770		29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 10465239		10465239		28MT	12	8/10	10	0
CUSTOMER PART NUMBER	DR 10478827	10478827			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10478828	10478828			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10478829	10478829			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10478830	10478830			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10478998	10478998			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10478999	10478999			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10479010	10479010			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479130	10479130			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479228	10479228			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10479283	10479283			41MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DR 10479299	10479299			41MT	12	MOD 3.00	11	SAE 1

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DR 10479323	10479323			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479328	10479328			50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479329	10479329			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479339	10479339			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479342	10479342			50MT	24	6/8	11	SPECIAL
CUSTOMER PART NUMBER	DR 10479343	10479343			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479346	10479346			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479352	10479352			50MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10479353	10479353			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 10479363	10479363			41MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1113274	1113274			28MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 19011402	19011402			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 19011407	19011407			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 19011409	19011409			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 19026028	19026028			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1990366	1990366			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1990406	1990406			42MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1990418	1990418			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 1990447	1990447			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 1990453	1990453			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1990483	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 1993788	1993788			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 1993796	1993796			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 1993940	1993940			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200007	8200007			38MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DR 8200014	8200014			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8200016	8200016			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200068	8200068			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200072	8200072			38MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200075	8200075			38MT	12	MOD 3.00	11	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DR 8200077	8200077			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8200078	8200078			38MT	24	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8200235	8200235			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8200288	8200288			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200290	8200290			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200297	8200297			29MT	24	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DR 8200321	8200321			39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200330			8200330	39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200386	8200386			29MT	24	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8200435			8200435	39MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200436	8200436			39MT	24	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR 8200469	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200529	8200529			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200571	8200571			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8300000		8300000		42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8300024		8300024		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 8300026		8300026		38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DR 8300063		8300063		29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461089		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10461098		10461098		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461169		10461169		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10461277		10461277		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10461298		10461298		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR 10461765		10461765		29MT	NULL	NULL	NULL	0
CUSTOMER PART NUMBER	DR 10465043		10465043		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 10478812	10478812			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 10479327	10479327			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 19011400	19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR 19011530	19011530			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 1990413	1990413			42MT	24	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DR 8200103	8200103			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR 8200291P	8200291			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR 8200308			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR 8200570	8200570			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR 8200829	8200829			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR/1990489	1990489			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR/8200055	8200055			41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DR/8200287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR/8200308			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR/8200434			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR/8200571	8200571			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR10461058		10461058		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DR10461207		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR10461329			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR-10461431		10461431		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DR10461454		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR10461772		10461772		29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR10465150		10465150		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DR10479068		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR10479648		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR19011403	19011403			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR19011514	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR19011525	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR19011529			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR19026035	19026035			38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DR-19900483	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR1990424	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR-1990489	1990489			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR-1990490	1990490			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR1993856			8200433	39MT	12	8/10	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DR1993928		10461277		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR-19990490	1990490			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR61003775	8201100			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR61003776	8201100			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR61007435			61013765	39MT	12	6/8	11	0
CUSTOMER PART NUMBER	DR61008898	61008898			39MT	12	8/10	11	SAE 3
CUSTOMER PART NUMBER	DR61012343	61008898			39MT	12	8/10	11	SAE 3
CUSTOMER PART NUMBER	DR8200005	8200005			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR82000434			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR-8200055	8200055			41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DR8200076	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR8200081			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR8200091			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200103P	8200103			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DR8200138	8200297			29MT	24	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DR-8200287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR-8200289	8200289			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200291	8200291			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR8200312			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200313			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200319			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR-8200433			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR-8200434			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR-8200468	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	DR8200474	8200474			29MT	24	8/10	10	SAE 1
CUSTOMER PART NUMBER	DR8200604			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200618			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DR8200654			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200686			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8200960			8200971	39MT	12	6/8	11	SAE 1

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DR8201063			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	DR8201083			8200971	39MT	12	6/8	11	SAE 1
CUSTOMER PART NUMBER	DR8201100	8201100			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR820308			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DR8300005		8300005		38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DR93592	93592			REFRIGERATION/ AUX	12	0	9	0
CUSTOMER PART NUMBER	DRA10461058		10461058		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DRA10461089		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10461094		10461094		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461098		10461098		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461110		10461110		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461160		10461160		50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10461161		10461161		50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10461169		10461169		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10461170		10461170		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DRA10461171		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10461207		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461225		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461277		10461277		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10461282		10461282		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRA10461298		10461298		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461416		10461416		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461431		10461431		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRA10461454		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DRA10461481		10461481		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA10461493		10461493		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10461496		10461496		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRA10461738		10461738		50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10461739		10461739		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10461744		10461744		50MT	24	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DRA10461764	8200972			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461765		10461765		29MT	NULL	NULL	NULL	0
CUSTOMER PART NUMBER	DRA10461768		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA10461770		10461770		29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA10461772		10461772		29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DRA10465043		10465043		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA10465150		10465150		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA10465239		10465239		28MT	12	8/10	10	0
CUSTOMER PART NUMBER	DRA10478812	10478812			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10478827	10478827			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10478828	10478828			50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10478829	10478829			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10478830	10478830			50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10478998	10478998			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10478999	10478999			41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10479010	10479010			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479013	10479013			41MT	24	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRA10479130	10479130			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479228	10479228			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA10479283	10479283			41MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA10479299	10479299			41MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA10479323	10479323			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479327	10479327			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479328	10479328			50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479329	10479329			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479330	10479330			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479339	10479339			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479342	10479342			50MT	24	6/8	11	SPECIAL
CUSTOMER PART NUMBER	DRA10479343	10479343			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479344	10479344			50MT	24	6/8	11	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DRA10479353	10479353			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA10479363	10479363			41MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA1113274	1113274			28MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA19011400	19011400			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA19011402	19011402			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA19011403	19011403/8200103			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DRA19011407	19011407/8200972			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA19011409	19011409			29MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	DRA19011530	19011530			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA19026028	19026028			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA19026035	19026035			38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA1990366	1990366			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA1990406	1990406			42MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA1990447	1990447			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA1990453	1990453			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA1990483	1990483			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA1990489	1990489			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA1990490	1990490			42MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA1993788	1993788			42MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA1993796	1993796			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA1993940	1993940			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200005	8200005			38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200007	8200007			38MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	DRA8200016	8200016			50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200055	8200055			41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRA8200072	8200072			38MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200075	8200075			38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA8200076	8200076			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA8200077	8200077			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA8200078	8200078			38MT	24	8/10	10	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DRA8200103	8200103			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DRA8200235	8200235			38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA8200253	8200253			42MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200287	8200287			39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DRA8200288	8200288			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200289	8200289			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200290	8200290			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200291	8200291			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200295	8200295			29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	DRA8200297	8200297			29MT	24	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA8200308			8200308	39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200321	8200321			39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200326	8200326			29MT	12	MOD 3.00	10	SAE 1
CUSTOMER PART NUMBER	DRA8200330			8200330	39MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8200433			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200434			8200434	39MT	12	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DRA8200435			8200435	39MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200436	8200436			39MT	24	MOD 3.00	12	SAE 3
CUSTOMER PART NUMBER	DRA8200468	8200468			39MT	12	8/10	11	SAE 1
CUSTOMER PART NUMBER	DRA8200469	8200469			39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200571	8200571			29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA8200664			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8200742	8200742			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	DRA8300005		8300005		38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRA8300024		8300024		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRA8300026		8300026		38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	DRA8300063		8300063		29MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRR10461431		10461431		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRR10461768		10461768		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRX10461089		10461089		37MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CUSTOMER PART NUMBER	DRX10461098		10461098		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	DRX10461171		10461171		41MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	DRX10461282		10461282		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	DRX10465043		10465043		28MT	12	10/12	10	SAE 1
CUSTOMER PART NUMBER	R0461160		10461160		50MT	64	6/8	11	SAE 3
CUSTOMER PART NUMBER	R0461161		10461161		50MT	32	6/8	11	SAE 3
CUSTOMER PART NUMBER	R10461089		10461089		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	R10461169		10461169		37MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	R10461170		10461170		37MT	12	8/10	10	SAE 3
CUSTOMER PART NUMBER	R10461207		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	R10461225		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	R10461416		10461416		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	R10461738		10461738		50MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	R10461765		10461765		29MT	NULL	NULL	NULL	0
CUSTOMER PART NUMBER	R10461772		10461772		29MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	R8300005		8300005		38MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	R8300024		8300024		38MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	R8300026		8300026		38MT	12	MOD 3.00	11	SAE 1
CUSTOMER PART NUMBER	REM10461225		10461225		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	RF659183404	10479228			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	SE 10461207		10461207		37MT	12	8/10	10	SAE 1
CUSTOMER PART NUMBER	TS-1736	10479228			42MT	24	8/10	12	SAE 3
CUSTOMER PART NUMBER	W:DR-10461454		10461454		28MT	12	MOD 3.00	9	SAE 1
CUSTOMER PART NUMBER	W:DR-10461496		10461496		41MT	12	8/10	12	SAE 1
CUSTOMER PART NUMBER	W:DR-10461739		10461739		50MT	24	6/8	11	SAE 3
CUSTOMER PART NUMBER	W:DR-19011530	19011530			39MT	12	6/8	11	SAE 3
CUSTOMER PART NUMBER	ZLNM105322			8200433	39MT	12	8/10	12	SAE 3
CUSTOMER PART NUMBER	ZLNM105612	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
DAIMLER CHRYSLER	51518101	10479283			41MT	12	MOD 3.00	11	SAE 1
DAIMLER CHRYSLER	A0061516701	8200297			29MT	24	MOD 3.00	11	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DETROIT DIESEL	R0461089		10461089		37MT	12	8/10	12	SAE 3
DETROIT DIESEL	R0461126	1990483			42MT	12	6/8	11	SAE 3
DETROIT DIESEL	R0461127	1990490			42MT	12	6/8	11	SAE 3
DETROIT DIESEL	R0461128	10478998/1990418			42MT	24	6/8	11	SAE 3
DETROIT DIESEL	R0461178			8200308	39MT	12	6/8	11	SAE 3
DETROIT DIESEL	R0461182		10461089		37MT	12	8/10	12	SAE 3
DETROIT DIESEL	R0461185	1990489			42MT	12	6/8	11	SAE 3
DETROIT DIESEL	R0461193	1990447			42MT	24	6/8	11	SAE 3
DETROIT DIESEL	R0461384	10478812			41MT	12	8/10	12	SAE 3
DETROIT DIESEL	R0461385		10461169		37MT	12	8/10	12	SAE 3
DETROIT DIESEL	R0461386	10478999	10461171		41MT	12	8/10	12	SAE 3
DETROIT DIESEL	R0461454		10461454		28MT	12	MOD 3.00	9	SAE 1
DETROIT DIESEL	R0461493		10461493		50MT	24	6/8	11	SAE 3
DETROIT DIESEL	R0465407		10465043		28MT	12	10/12	10	SAE 1
DETROIT DIESEL	R0465408		10465239		28MT	12	8/10	10	0
DTNA	A0061515001	8200103			29MT	12	MOD 3.00	9	SAE 1
DTNA	A0071510101	8200075			38MT	12	MOD 3.00	11	SAE 1
DTNA	A0071513501	8200075			38MT	12	MOD 3.00	11	SAE 1
DTNA	DR 10461431		10461431		41MT	12	8/10	12	SAE 1
DTNA	DR 10461738		10461738		50MT	12	6/8	11	SAE 3
DTNA	DR 10461768		10461768		38MT	12	8/10	10	SAE 1
DTNA	DR 10479299	10479299			41MT	12	MOD 3.00	11	SAE 1
DTNA	DR 1990490	1990490			42MT	12	6/8	11	SAE 3
DTNA	DR 8200055	8200055			41MT	12	8/10	12	SAE 1
DTNA	DR 8200077	8200077			38MT	12	8/10	10	SAE 1
DTNA	DR 8200289	8200289			39MT	12	6/8	11	SAE 3
DTNA	DR 8200434			8200434	39MT	12	MOD 3.00	12	SAE 3
DTNA	DR10465043		10465043		28MT	12	10/12	10	SAE 1
DTNA	DR-8200308			8200308	39MT	12	6/8	11	SAE 3
DTNA	DR8300026		8300026		38MT	12	MOD 3.00	11	SAE 1

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DTNA	LN M105602			8200433	39MT	12	8/10	12	SAE 3
EUCLID	E821104X		10465043		28MT	12	10/12	10	SAE 1
EUCLID	E-821106X		10465054		28MT	12	10/12	10	PAD
EUCLID	E-821112X		10461089		37MT	12	8/10	12	SAE 3
EUCLID	E821124X			8200308	39MT	12	6/8	11	SAE 3
FORD	4C4O-11001-CA		10461765		29MT	NULL	NULL	NULL	0
FORD	4C4Z11002CA	19011409			29MT	12	10/12	10	SAE 1
FORD	7C4511001-AB	8200478			29MT	12	10/12	10	SAE 1
FORD	8C4Z11002BA	8200235			38MT	12	8/10	10	SAE 1
FORD	BC-4511001-BA	8200474			29MT	24	8/10	10	SAE 1
FORD	C5TF11000A			8200308	39MT	12	6/8	11	SAE 3
FORD	C5TZ11002C			8200308	39MT	12	6/8	11	SAE 3
FORD	C6TF11000A			8200308	39MT	12	6/8	11	SAE 3
FORD	C6TF11000C			8200308	39MT	12	6/8	11	SAE 3
FORD	C6TZ11002E			8200308	39MT	12	6/8	11	SAE 3
FORD	D3TF11001BA			8200308	39MT	12	6/8	11	SAE 3
FORD	D4TZ11002A			8200308	39MT	12	6/8	11	SAE 3
FORD	D4TZ11002B			8200308	39MT	12	6/8	11	SAE 3
FORD	D7HT-11001-AA		10461739		50MT	24	6/8	11	SAE 3
FORD	D7HT-11001-BA		10461739		50MT	24	6/8	11	SAE 3
FORD	D8HZ-11002-C		10461739		50MT	24	6/8	11	SAE 3
FORD	E1HT-11001-DB		10461739		50MT	24	6/8	11	SAE 3
FORD	E1HT-11001-EB		10461739		50MT	24	6/8	11	SAE 3
FORD	E2HT-11001-CA		10461739		50MT	24	6/8	11	SAE 3
FORD	E2HT-11001-DA	10479339	10461739		50MT	24	6/8	11	SAE 3
FORD	E3HZ-11002-A		10461739		50MT	24	6/8	11	SAE 3
FORD	E3HZ-11002-B		10461739		50MT	24	6/8	11	SAE 3
FORD	E3HZ-11002-C		10461739		50MT	24	6/8	11	SAE 3
FORD	E6HT-11001-CA			8200308	39MT	12	6/8	11	SAE 3
FORD	E6HZ-11002-C			8200308	39MT	12	6/8	11	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
FORD	E6HZ11002D			8200308	39MT	12	6/8	11	SAE 3
FORD	F0HT11001AA			8200308	39MT	12	6/8	11	SAE 3
FORD	F0HT11001AB			8200308	39MT	12	6/8	11	SAE 3
FORD	F0HT-11002-A			8200308	39MT	12	6/8	11	SAE 3
FORD	F0HZ-11002-A			8200308	39MT	12	6/8	11	SAE 3
FORD	F3HT-11001-AB		10465150		28MT	12	10/12	10	SAE 1
FORD	F3HT-11001-AC		10465150		28MT	12	10/12	10	SAE 1
FORD	F3HZ-11002-A		10465150		28MT	12	10/12	10	SAE 1
FORD	F3HZ-11002-C		10461225		37MT	12	8/10	10	SAE 1
FORD	F4HT-11001-AA		10465150		28MT	12	10/12	10	SAE 1
FORD	F6HT11001AA			8200308	39MT	12	6/8	11	SAE 3
FORD	F6HT11001GA			8200308	39MT	12	6/8	11	SAE 3
FORD	F6HT-11001-HA			8200308	39MT	12	6/8	11	SAE 3
FORD	F6HZ11002AA			8200308	39MT	12	6/8	11	SAE 3
FORD	F6HZ11002GA			8200308	39MT	12	6/8	11	SAE 3
FORD	F6HZ-11002-HA			8200308	39MT	12	6/8	11	SAE 3
FORD	F7HT-11001-DA			8200308	39MT	12	6/8	11	SAE 3
FORD	F7HZ11002CA			8200308	39MT	12	6/8	11	SAE 3
FORD	F7HZ-11002-DA			8200308	39MT	12	6/8	11	SAE 3
FORD	F7HZ11002EA		10465150		28MT	12	10/12	10	SAE 1
FORD	SA-756A			8200308	39MT	12	6/8	11	SAE 3
FORD	XC45-11001-AA		10461298		37MT	12	8/10	10	SAE 1
FORD	XC4Z-11002-AA		10461298		37MT	12	8/10	10	SAE 1
FORD	XC4Z-11002-AARM		10461298		37MT	12	8/10	10	SAE 1
FORD	XC4Z11V002AARM		10461298		37MT	12	8/10	10	SAE 1
FORD	YC3511001AA		10461170		37MT	12	8/10	10	SAE 3
GENERAL MOTORS	18479387	8200076			38MT	12	8/10	10	SAE 1
GENERAL MOTORS	94052837		61007512		MISC	12	0	11	0
GENERAL MOTORS	97207786		61007505		MISC	12	0	11	0
GENERAL MOTORS	97320909		61007505		MISC	12	0	11	0

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
GENERAL MOTORS	97500231		61007512		MISC	12	0	11	0
GENERAL MOTORS	97500309		61007512		MISC	12	0	11	0
GENERAL MOTORS	97500358		61007512		MISC	12	0	11	0
GENERAL MOTORS	97715034		61007512		MISC	12	0	11	0
GENERAL MOTORS	97715054		61007512		MISC	12	0	11	0
GENERAL MOTORS	97728666		61007505		MISC	12	0	11	0
GILLIG CORP	53-19322-028	8200517			42MT	24	8/10	12	SAE 3
HINO	28100-2520		61007509		MISC	12	0	11	0
HINO	28100-2521		61007509		MISC	12	0	11	0
HINO	28100-2521A		61007509		MISC	12	0	11	0
HINO	28100-2521B		61007509		MISC	12	0	11	0
HINO	28100-2540		61007507		MISC	12	0	11	0
HINO	28100-2541		61007507		MISC	12	0	11	0
HINO	28100-2541A		61007507		MISC	12	0	11	0
HINO	28100-2541B		61007507		MISC	12	0	11	0
HINO	28100-2910		61007510		MISC	12	0	11	0
HINO	28100-2910B		61007510		MISC	12	0	11	0
HINO	28100-2910R		61007510		MISC	12	0	11	0
HINO	28100-2911A		61007510		MISC	12	0	11	0
HINO	28100-2911B		61007510		MISC	12	0	11	0
HINO	28100-2920		61007508		MISC	12	0	11	0
HINO	28100-2920R		61007508		MISC	12	0	11	0
HINO	28100-2921		61007508		MISC	12	0	11	0
HINO	28100-2921A		61007508		MISC	12	0	11	0
HINO	28100-2921AX		61007508		MISC	12	0	11	0
HYSTER	1335407	1113274			28MT	12	8/10	10	SAE 1
INTERNATIONAL	1651386C91		10461089		37MT	12	8/10	12	SAE 3
INTERNATIONAL	2585347C91	8200076			38MT	12	8/10	10	SAE 1
INTERNATIONAL HARVESTER	121913C91	1113274			28MT	12	8/10	10	SAE 1
INTERNATIONAL HARVESTER	2011847C91		10461169		37MT	12	8/10	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
ISUZU	1811002340		61007511		MISC	12	0	11	0
ISUZU	1811002341		61007511		MISC	12	0	11	0
ISUZU	1811002342		61007511		MISC	12	0	11	0
ISUZU	1811002990		61007512		MISC	12	0	11	0
ISUZU	1811002991		61007512		MISC	12	0	11	0
ISUZU	2900578600		61007513		MISC	12	0	11	0
ISUZU	2901232000		61007505		MISC	12	0	11	0
ISUZU	2901239100		61007513		MISC	12	0	11	0
ISUZU	2911234200		61007512		MISC	12	0	11	0
ISUZU	2912559020		61007511		MISC	12	0	11	0
ISUZU	2912559021		61007511		MISC	12	0	11	0
ISUZU	8941475492	93584			REFRIGERATION/AUX	12	0	9	0
ISUZU	8944299770	93584			REFRIGERATION/AUX	12	0	9	0
ISUZU	8971185420	93584			REFRIGERATION/AUX	12	0	9	0
ISUZU	8971197490		61007511		MISC	12	0	11	0
ISUZU	8971477780		61007513		MISC	12	0	11	0
ISUZU	8971477781		61007513		MISC	12	0	11	0
ISUZU	8971477782		61007513		MISC	12	0	11	0
ISUZU	8971477783		61007513		MISC	12	0	11	0
ISUZU	8971477784		61007513		MISC	12	0	11	0
ISUZU	8971477785		61007513		MISC	12	0	11	0
ISUZU	8971740430		61007511		MISC	12	0	11	0
ISUZU	8972077860		61007505		MISC	12	0	11	0
ISUZU	8972077861		61007505		MISC	12	0	11	0
ISUZU	8972077862		61007505		MISC	12	0	11	0
ISUZU	8972286640	93584			REFRIGERATION/AUX	12	0	9	0
ISUZU	8975002310		61007512		MISC	12	0	11	0
ISUZU	8975003580		61007512		MISC	12	0	11	0
ISUZU	8975003581		61007512		MISC	12	0	11	0
ISUZU	8975003582		61007512		MISC	12	0	11	0

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
ISUZU	9792280970		61007513		MISC	12	0	11	0
JOHN DEERE	AM877285	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH12084	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH12741	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH15586	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH19279	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH19282	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	CH19284	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	RE24305			8200308	39MT	12	6/8	11	SAE 3
JOHN DEERE	RE41754			8200308	39MT	12	6/8	11	SAE 3
JOHN DEERE	RE41755		10461416		37MT	12	8/10	10	SAE 1
JOHN DEERE	RE65190		10461416		37MT	12	8/10	10	SAE 1
JOHN DEERE	SE501409		10461416		37MT	12	8/10	10	SAE 1
JOHN DEERE	SE501452		10461416		37MT	12	8/10	10	SAE 1
JOHN DEERE	TY6648	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6650	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6673	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6675	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6715	93550			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6717	93553			REFRIGERATION/ AUX	12	0	15	0
JOHN DEERE	TY6728			8200308	39MT	12	6/8	11	SAE 3
KOMATSU	STR1003		10465043		28MT	12	10/12	10	SAE 1
KOMATSU	STR1012	1990483			42MT	12	6/8	11	SAE 3
KOMATSU	STR1015	10478998/1990418			42MT	24	6/8	11	SAE 3
KOMATSU	STR1016	1993796/1990453			42MT	24	8/10	12	SAE 3
KOMATSU	STR1017	10479339			50MT	24	6/8	11	SAE 3
MACK	21019460	8201100			39MT	12	8/10	12	SAE 3
MACK	21045969	8200469			39MT	12	8/10	12	SAE 3
MACK	2132-1990483	1990483			42MT	12	6/8	11	SAE 3
MACK	2132X10461045			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MACK	2132X10461055				39MT	12	8/10	12	SAE 3
MACK	22398219	8201100			39MT	12	8/10	12	SAE 3
MACK	22602989	8200469			39MT	12	8/10	11	SAE 1
MACK	22602992	8200468			39MT	12	8/10	12	SAE 3
MACK	22602996	8201100		8200308	39MT	12	6/8	11	SAE 3
MACK	22818223			8200308	39MT	12	6/8	11	SAE 3
MACK	22821042			8200308	39MT	12	6/8	11	SAE 3
MACK	25162567			8200308	39MT	12	6/8	11	SAE 3
MACK	5034-M125601				39MT	12	8/10	11	SAE 1
MACK	85108427	8200468		8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4172P1			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4172T			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4209			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4267M			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4267M2			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4272M			8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ4272M2				42MT	12	8/10	12	SAE 3
MACK	8MJ4295M	1990406		8200308	39MT	12	6/8	11	SAE 3
MACK	8MJ498P3				39MT	12	6/8	11	SAE 3
MACK	8MJ5439M	8200289		8200308	39MT	12	6/8	11	SAE 3
MACK	MK4298			8200434	39MT	12	MOD 3.00	12	SAE 3
MERITOR	SNLS1773			8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR0121				38MT	12	MOD 3.00	11	SAE 1
MERITOR	STR0123	8200075			38MT	12	8/10	10	SAE 1
MERITOR	STR0124	8200077			38MT	24	8/10	12	SAE 3
MERITOR	STR0130	8200072			38MT	24	8/10	10	SAE 1
MERITOR	STR0131	8200078			REFRIGERATION/ AUX	12	0	9	0
MERITOR	STR3571	93598		8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR4206			8200308	39MT	12	6/8	11	SAE 3
MERITOR	STR-4207			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MERITOR	STR4209			8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR4210			8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR4290			8200308	39MT	12	6/8	11	SAE 3
MERITOR	STR4291			8200434	39MT	12	MOD 3.00	12	SAE 3
MERITOR	STR4292			8200308	39MT	12	6/8	11	SAE 3
MERITOR	STR4293	8200287			39MT	12	MOD 3.00	12	SAE 3
MERITOR	STR4294			8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR4295			8200433	39MT	12	8/10	12	SAE 3
MERITOR	STR-4302			8200330	39MT	24	6/8	11	SAE 3
MERITOR	STR4305			8200435	39MT	24	8/10	12	SAE 3
MERITOR	STR4390			8200330	39MT	24	6/8	11	SAE 3
MERITOR	STR4391			8200435	39MT	24	8/10	12	SAE 3
MERITOR	STR4392B			8200330	39MT	24	6/8	11	SAE 3
MERITOR	STR4393			8200435	39MT	24	8/10	12	SAE 3
MERITOR	STR4394	8200436			39MT	24	MOD 3.00	12	SAE 3
MERITOR	STR5021			8200435	39MT	24	8/10	12	SAE 3
MERITOR	STR5300	93589			REFRIGERATION/ AUX	12	0	9	0
MERITOR	STR6006	93584			REFRIGERATION/ AUX	12	0	9	0
MERITOR	STR6007	93592			REFRIGERATION/ AUX	12	0	9	0
MERITOR	STR6009	93591			REFRIGERATION/ AUX	12	0	9	0
MERITOR	STR6052	61005265			31MT	12	10/12	10	SAE 1
MERITOR	STR-7005	61005265			31MT	12	10/12	10	SAE 1
MERITOR	STR-7051	61005265			31MT	12	10/12	10	SAE 1
MERITOR	STR7054	8200400			29MT	12	8/10	10	SAE 1
MERITOR	STR9050	8200076			38MT	12	8/10	10	SAE 1
MERITOR	STR9051			8200433	39MT	12	8/10	12	SAE 3
MIDLAND	RS128000X		10465043		28MT	12	10/12	10	SAE 1
MIDLAND	RS128010X		10465150		28MT	12	10/12	10	SAE 1
MIDLAND	RS128012X		10465054		28MT	12	10/12	10	PAD
MIDLAND	RS128013X		10465239		28MT	12	8/10	10	0

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MIDLAND	RS128014X	1113274			28MT	12	8/10	10	SAE 1
MIDLAND	RS137000X		10461089		37MT	12	8/10	12	SAE 3
MIDLAND	RS137001X		10461058		37MT	12	8/10	10	SAE 3
MIDLAND	RS137013X		10461110		37MT	12	8/10	10	SAE 1
MIDLAND	RS137014X		10461169		37MT	12	8/10	12	SAE 3
MIDLAND	RS137015X		10461170		37MT	12	8/10	10	SAE 3
MIDLAND	RS137017X		10461207		37MT	12	8/10	10	SAE 1
MIDLAND	RS137021X		10461416		37MT	12	8/10	10	SAE 1
MIDLAND	RS150002X		10461739		50MT	24	6/8	11	SAE 3
MIDLAND	RS150010X		10461738		50MT	12	6/8	11	SAE 3
MIDLAND	RS150012X		10461160		50MT	64	6/8	11	SAE 3
MIDLAND	RS150013X		10461161		50MT	32	6/8	11	SAE 3
MOTORCRAFT	SA1006		10461298		37MT	12	8/10	10	SAE 1
MOTORCRAFT	SA1006RM		10461298		37MT	12	8/10	10	SAE 1
MOTORCRAFT	SA-744		10461739		50MT	24	6/8	11	SAE 3
MOTORCRAFT	SA-745		10461739		50MT	24	6/8	11	SAE 3
MOTORCRAFT	SA-747		10461739		50MT	24	6/8	11	SAE 3
MOTORCRAFT	SA-756			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-756-A			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-778			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-802		10465150		28MT	12	10/12	10	SAE 1
MOTORCRAFT	SA-823			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-825		10461298		37MT	12	8/10	10	SAE 1
MOTORCRAFT	SA-829			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-835			8200308	39MT	12	6/8	11	SAE 3
MOTORCRAFT	SA-845			8200308	39MT	12	6/8	11	SAE 3
MPA NEW	718004N	93590			REFRIGERATION/ AUX	12	0	9	0
MPA NEW	76297N		10461170		37MT	12	8/10	10	SAE 3
MPA NEW	76380N		10461089		37MT	12	8/10	12	SAE 3
MPA NEW	76400N		10461169		37MT	12	8/10	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MPA NEW	76505N		10461098		37MT	12	8/10	10	SAE 1
MPA NEW	76573N		10465043		28MT	12	10/12	10	SAE 1
MPA NEW	76602N		10465239		28MT	12	8/10	10	0
MPA REMAN	716657	93594/93553/93550			REFRIGERATION/ AUX	12	0	9/15/15	0
MPA REMAN	717088	93584			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	717098	93594			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	717375	93553/93550			REFRIGERATION/ AUX	12	0	15	0
MPA REMAN	717619	93549			REFRIGERATION/ AUX	12	0	11	0
MPA REMAN	717819	93549			REFRIGERATION/ AUX	12	0	11	0
MPA REMAN	718004	93590			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	718014	93553			REFRIGERATION/ AUX	12	0	15	0
MPA REMAN	718067	93584			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	718148	93594			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	718277	93588			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	718490	93591			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	718557	93589			REFRIGERATION/ AUX	12	0	9	0
MPA REMAN	76297		10461170		37MT	12	8/10	10	SAE 3
MPA REMAN	76380		10461089		37MT	12	8/10	12	SAE 3
MPA REMAN	76400		10461169		37MT	12	8/10	12	SAE 3
MPA REMAN	76504		10461110		37MT	12	8/10	10	SAE 1
MPA REMAN	76505		10461098		37MT	12	8/10	10	SAE 1
MPA REMAN	76573		10465043		28MT	12	10/12	10	SAE 1
MPA REMAN	76602		10465239		28MT	12	8/10	10	0
MPA REMAN	76613		10461171		41MT	12	8/10	12	SAE 3
MPA REMAN	76667		10461282		41MT	12	8/10	12	SAE 1
MPA XTREME NEW	X74930N		10461739		50MT	24	6/8	11	SAE 3
MPA XTREME NEW	X76297N		10461170		37MT	12	8/10	10	SAE 3
MPA XTREME NEW	X76393N		10461089		37MT	12	8/10	12	SAE 3
MPA XTREME NEW	X76398N		10461058		37MT	12	8/10	10	SAE 3
MPA XTREME NEW	X76400N		10461169		37MT	12	8/10	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MPA XTREME NEW	X76505N		10461098		37MT	12	8/10	10	SAE 1
MPA XTREME NEW	X76573N		10465043		28MT	12	10/12	10	SAE 1
MPA XTREME NEW	X76602N		10465239		28MT	12	8/10	10	0
MPA XTREME REMAN	X74927		10461739		50MT	24	6/8	11	SAE 3
MPA XTREME REMAN	X74930		10461739		50MT	24	6/8	11	SAE 3
MPA XTREME REMAN	X74992		10461739		50MT	24	6/8	11	SAE 3
MPA XTREME REMAN	X76297		10461170		37MT	12	8/10	10	SAE 3
MPA XTREME REMAN	X76393		10461089		37MT	12	8/10	12	SAE 3
MPA XTREME REMAN	X76398		10461058		37MT	12	8/10	10	SAE 3
MPA XTREME REMAN	X76400		10461169		37MT	12	8/10	12	SAE 3
MPA XTREME REMAN	X76403		10461089		37MT	12	8/10	12	SAE 3
MPA XTREME REMAN	X76412		10461058		37MT	12	8/10	10	SAE 3
MPA XTREME REMAN	X76504		10461110		37MT	12	8/10	10	SAE 1
MPA XTREME REMAN	X76505		10461098		37MT	12	8/10	10	SAE 1
MPA XTREME REMAN	X76573		10465043		28MT	12	10/12	10	SAE 1
MPA XTREME REMAN	X76602		10465239		28MT	12	8/10	10	0
MPA XTREME REMAN	X76613		10461171		41MT	12	8/10	12	SAE 3
MPA XTREME REMAN	X76617	10478812			41MT	12	8/10	12	SAE 3
MPA XTREME REMAN	X76667		10461282		41MT	12	8/10	12	SAE 1
MPA XTREME REMAN	X76810		10461170		37MT	12	8/10	10	SAE 3
MPA XTREME REMAN	X76905		10461098		37MT	12	8/10	10	SAE 1
NAVISTAR	1614303C91	1990406			42MT	12	8/10	12	SAE 3
NAVISTAR	1626091C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	1673725C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	1688615C91	8200007	10461170		38MT	12	8/10	10	SAE 3
NAVISTAR	20165571C91		10461170		37MT	12	8/10	10	SAE 3
NAVISTAR	2018380C91	10478999			41MT	12	8/10	12	SAE 3
NAVISTAR	2018381C91	10478812			41MT	12	8/10	12	SAE 3
NAVISTAR	2508912C91	8200007	10461170		38MT	12	8/10	10	SAE 3
NAVISTAR	2509687C91			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR	2585095C91	19011402/19011400			29MT	12	10/12	10	SAE 1
NAVISTAR	2593562C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	2593564C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	262762C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	263819C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3520840C91	8200007			38MT	12	8/10	10	SAE 3
NAVISTAR	3540038C91	1990490			42MT	12	6/8	11	SAE 3
NAVISTAR	3571513	19011407			29MT	12	8/10	10	SAE 1
NAVISTAR	3571513C91	19011407			29MT	12	8/10	10	SAE 1
NAVISTAR	3571513C92	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3571513C93	19011407			29MT	12	8/10	10	SAE 1
NAVISTAR	3574173C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574175C			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574175C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574175C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574175C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574175C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574176C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3574564C1	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3574564C91	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3574564C92	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3576957C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3576958C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3581031C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3582607C91	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3582607C92	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3584403C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3586580C91	19011409			29MT	12	10/12	10	SAE 1
NAVISTAR	3591688C91	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3593808C91	10478999			41MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR	3593808C92	10478999/8200005			41MT/38MT	12	8/10	12	SAE 3
NAVISTAR	3593808C93	10478999/8200005			41MT/38MT	12	8/10	12	SAE 3
NAVISTAR	3593812C91	10478812			41MT	12	8/10	12	SAE 3
NAVISTAR	3593812C92	10478812			41MT	12	8/10	12	SAE 3
NAVISTAR	3595329	8200005			38MT	12	8/10	12	SAE 3
NAVISTAR	3595329C91	8200005			38MT	12	8/10	12	SAE 3
NAVISTAR	3595329C92	8200005			38MT	12	8/10	12	SAE 3
NAVISTAR	3595800C91	8200005			38MT	12	8/10	12	SAE 3
NAVISTAR	3598301C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3598301C92			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3598301C93			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3598301C94			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3598301C95			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3598301C96			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3601668C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3610406C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3615419			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C92			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C93			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C94			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C95			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3615419C96			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	361549C96			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3667911C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3667911C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3668605C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3668605C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3668605C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3668605C94			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR	3668605C95			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3668605C96			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3672731			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3672731C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3676874C91	1990483			42MT	12	6/8	11	SAE 3
NAVISTAR	3682414C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3682414C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3682414C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3682414C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3682414C95			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3682438C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3700307C91	19026028			38MT	12	8/10	12	SAE 3
NAVISTAR	3708577C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3713422C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3713423C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3804470	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804470C92	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804470C93	19011407/8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804471	8200005		8200433	38MT	12	8/10	12	SAE 3
NAVISTAR	3804471C91	8200005		8200433	38MT	12	8/10	12	SAE 3
NAVISTAR	3804471C92	8200005		8200433	38MT	12	8/10	12	SAE 3
NAVISTAR	3804471C93	8200005		8200433	38MT	12	8/10	12	SAE 3
NAVISTAR	3804472			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804472C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804472C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804472C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804472C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804472C95			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473C91			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR	3804473C92			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473C93			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473C95			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804473C96			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3804480	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804480C91	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804480C92	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804480C93	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3804481C93	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	3807423C91	8200235			38MT	12	8/10	10	SAE 1
NAVISTAR	3809913C91	8200253			42MT	12	8/10	12	SAE 3
NAVISTAR	3815734			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C92			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C93			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C94			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C95			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C96			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3815734C97			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	3825310C91	8200076			38MT	12	8/10	10	SAE 1
NAVISTAR	3863010C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3863010C94			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	3965972C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	399440C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	4041862	8200077			38MT	12	8/10	10	SAE 1
NAVISTAR	4041862C91	8200077			38MT	12	8/10	10	SAE 1
NAVISTAR	4041862C92	8200077			38MT	12	8/10	10	SAE 1
NAVISTAR	4041862C93	8200077			38MT	12	8/10	10	SAE 1
NAVISTAR	4099176C91	8200077			38MT	12	8/10	10	SAE 1

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR	4099176C92	8200077			38MT	12	8/10	10	SAE 1
NAVISTAR	412732C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	415515C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	462588C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	489717C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	522458C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	523579C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	530692C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	597219C91			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR	6109330C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	6725514C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	729912C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	739911C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	739912C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	777525C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	782685C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	786086C91			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	844317C91			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR	905720100110	8200875			29MT	12	MOD 3.00	11	SAE 1
NAVISTAR	MITIN1478			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	MS2-503ND			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR	SA-1041	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR	SA-883		10461170		37MT	12	8/10	10	SAE 3
NAVISTAR	ZLNM105617		10461170		37MT	12	8/10	10	SAE 3
NAVISTAR FLEETRITE	FLT2000120	8200076			38MT	12	8/10	10	SAE 1
NAVISTAR FLEETRITE	FLT2000121	8200005			38MT	12	8/10	12	SAE 3
NAVISTAR FLEETRITE	FLT2000122	8200007			38MT	12	8/10	10	SAE 3
NAVISTAR FLEETRITE	FLT2000141	8200571			29MT	12	8/10	10	SAE 1
NAVISTAR FLEETRITE	FLT2000144	8200972			29MT	12	8/10	10	SAE 1
NAVISTAR FLEETRITE	FLT2003901	8200287			39MT	12	MOD 3.00	12	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
NAVISTAR FLEETRITE	FLT2003902			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR FLEETRITE	FLT2004206			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR FLEETRITE	FLT2004292			8200308	39MT	12	6/8	11	SAE 3
NAVISTAR FLEETRITE	FLT2004293	8200287			39MT	12	MOD 3.00	12	SAE 3
NAVISTAR FLEETRITE	FLT2004304			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR FLEETRITE	FLT2004392			8200330	39MT	24	6/8	11	SAE 3
NAVISTAR FLEETRITE	ST3807			8200433	39MT	12	8/10	12	SAE 3
NAVISTAR FLEETRITE	ST3907			8200308	39MT	12	6/8	11	SAE 3
OSHKOSH	3806366			8200435	39MT	24	8/10	12	SAE 3
OSHKOSH CORPORATION	8KK198			8200308	39MT	12	6/8	11	SAE 3
PACCAR	10461207RMAN		10461207		37MT	12	8/10	10	SAE 1
PACCAR	10461496RMAN		10461496		41MT	12	8/10	12	SAE 1
PACCAR	10461738RMAN		10461738		50MT	12	6/8	11	SAE 3
PACCAR	12D616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	12VD616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	16D616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	1832022	8200077			38MT	12	8/10	10	SAE 1
PACCAR	2522010	8200793		8200971	39MT	12	6/8	11	0
PACCAR	2522020	19011402			29MT	12	10/12	10	SAE 1
PACCAR	2616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	3616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	AM86979	8200436			39MT	24	MOD 3.00	12	SAE 3
PACCAR	B616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D0616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61005003			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-1001-001	8200796			29MT	12	8/10	10	SAE 1
PACCAR	D61-1003-011	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	D61-1006	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	D611006001	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
PACCAR	D611008			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-1012	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	D6160005003			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6001-000			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6001-001			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6002-001			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6002-0012	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	D61-6002-002	8200289		8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6002-003	8200005		8200433	38MT	12	8/10	12	SAE 3
PACCAR	D61-6002-004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D616002004235143			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D6160020047			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6002-005			8200433	39MT	12	8/10	12	SAE 3
PACCAR	D61-6002-007	8200076			38MT	12	8/10	10	SAE 1
PACCAR	D61-6002-008			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6002-010	8200793		8200971	39MT	12	6/8	11	0
PACCAR	D61-6002-012	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	D61-6005-001			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6005-002	8200005		8200433	38MT	12	8/10	12	SAE 3
PACCAR	D616005003			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D616005003PB			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6005-005			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61-6005-006	8200005		8200433	38MT	12	8/10	12	SAE 3
PACCAR	D616005007	8200793		8200971	39MT	12	6/8	11	0
PACCAR	D61600503			8200308	39MT	12	6/8	11	SAE 3
PACCAR	D61605003			8200308	39MT	12	6/8	11	SAE 3
PACCAR	E616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	G616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	K616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR	P616002004			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
PACCAR	P6160020041			8200308	39MT	12	6/8	11	SAE 3
PACCAR	PC0079	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
PACCAR	T616002004			8200308	39MT	12	6/8	11	SAE 3
PACCAR TRP	RE3908			8200308	39MT	12	6/8	11	SAE 3
PACCAR TRP	RE3933			8200433	39MT	12	8/10	12	SAE 3
PACCAR TRP	RE3934			8200434	39MT	12	MOD 3.00	12	SAE 3
PERKINS	2873K116			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	01990354	1990483			42MT	12	6/8	11	SAE 3
REFERENCE NUMBER	0R2189			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	0R2191			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	0R-3525		10461094		37MT	12	8/10	10	SAE 1
REFERENCE NUMBER	0R5218			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	0R5347			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	0R-8383		10461282		41MT	12	8/10	12	SAE 1
REFERENCE NUMBER	0R9226	8200076			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	10026128	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	10062038	8200077			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	10R-0391		10461094		37MT	12	8/10	10	SAE 1
REFERENCE NUMBER	10R-0396		10461282		41MT	12	8/10	12	SAE 1
REFERENCE NUMBER	10R-1718		10461496		41MT	12	8/10	12	SAE 1
REFERENCE NUMBER	10R-3187		10461169		37MT	12	8/10	12	SAE 3
REFERENCE NUMBER	10R-3188		10461089		37MT	12	8/10	12	SAE 3
REFERENCE NUMBER	10R-3190		10461171		41MT	12	8/10	12	SAE 3
REFERENCE NUMBER	10R9815	10479339	10461739		50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	10R9816	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	1308066H91	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	1463503			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	1769512	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	1832039	8200793		8200971	39MT	12	6/8	11	0
REFERENCE NUMBER	19503N			8200308	39MT	12	6/8	11	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
REFERENCE NUMBER	199490	1990490			42MT	12	6/8	11	SAE 3
REFERENCE NUMBER	1OR-0391		10461094		37MT	12	8/10	10	SAE 1
REFERENCE NUMBER	1OR-0396		10461282		41MT	12	8/10	12	SAE 1
REFERENCE NUMBER	207-1541	8200957			42MT	24	8/10	12	SAE 1
REFERENCE NUMBER	207-1551	8200957			42MT	24	8/10	12	SAE 1
REFERENCE NUMBER	207-1555			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	207-1556	10479010			42MT	24	6/8	11	SAE 3
REFERENCE NUMBER	237-1962		10461744		50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	269-2757	8201093			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	280-8019	8200076			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	290-6527	8201092			50MT	24	8/10	13	SAE 3
REFERENCE NUMBER	2N2761			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	338-3454	8201091			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	3395406	8201140			39MT	24	8/10	12	SAE 1
REFERENCE NUMBER	35005			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	35005V			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	35005VL			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	35005VLP			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	35259840		10461170		37MT	12	8/10	10	SAE 3
REFERENCE NUMBER	352-9766	8201094			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	363-9839	8201092			50MT	24	8/10	13	SAE 3
REFERENCE NUMBER	3921012	8200005			38MT	12	8/10	12	SAE 3
REFERENCE NUMBER	3935071	19011402			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	3938497			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	3957597			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	3964427	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	3964428	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	3964432	19011402/19011400			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	396528300	8200972			29MT	12	8/10	10	SAE 1
REFERENCE NUMBER	396528300RX	8200972			29MT	12	8/10	10	SAE 1

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
REFERENCE NUMBER	3E7863			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	3T2654			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	3T2764			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	3T2782	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	3T2879			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	3T3154			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	3T5831	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	3T8948	10479331			50MT	32	6/8	11	SAE 3
REFERENCE NUMBER	3T8952	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	3T8955	10479343			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	4280001340			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	4280007120	8200078			38MT	24	8/10	10	SAE 1
REFERENCE NUMBER	428000-7140			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	4995641			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	4996708RX	8200077			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	4L9547			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	4N0956			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	4N956			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5302289	61005265			31MT	12	10/12	10	SAE 1
REFERENCE NUMBER	5367752			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5367753			8200330	39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	5367755			8200330	39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	5367756			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5367757			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5367758			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	5367762	8200321			39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	5367763	8200321			39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	5367764			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	5367766			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	5367767			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
REFERENCE NUMBER	5367768			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	5367770			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	5367774			8200330	39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	5449610	61005265			31MT	12	10/12	10	SAE 1
REFERENCE NUMBER	5L4160			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5L4168			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5L4169			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5L5667			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5L5867			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	5R-4865	1990366			42MT	24	8/10	12	SAE 3
REFERENCE NUMBER	61231341	8200103			29MT	12	MOD 3.00	9	SAE 1
REFERENCE NUMBER	6867N			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	6T0643	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	6T0647	10479343			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	7N0923	8200076			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	82000289	8200289			39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	82000308			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	82000433			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	82000434			8200434	39MT	12	MOD 3.00	12	SAE 3
REFERENCE NUMBER	8200067	19011402			29MT	12	10/12	10	SAE 1
REFERENCE NUMBER	82001100	8201100			39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	820030839MT			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	820055	8200055			41MT	12	8/10	12	SAE 1
REFERENCE NUMBER	8200717			8200330	39MT	24	6/8	11	SAE 3
REFERENCE NUMBER	820433			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	8300308			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	8C3592			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	8C3593			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	8C3596			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	8C3652			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
REFERENCE NUMBER	8L8206			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	90022950	8200076			38MT	12	8/10	10	SAE 1
REFERENCE NUMBER	90027707	8200005			38MT	12	8/10	12	SAE 3
REFERENCE NUMBER	9L6200			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	9N0716			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	9N0721			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	9X9995	10479013			41MT	24	8/10	12	SAE 1
REFERENCE NUMBER	DR61000945			61013765	39MT	12	6/8	11	0
REFERENCE NUMBER	FLT2000123	8200075			38MT	12	MOD 3.00	11	SAE 1
REFERENCE NUMBER	FLT2003900			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	FLT2004290			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	KW0779			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	MS-53011-2L			8200435	39MT	24	8/10	12	SAE 3
REFERENCE NUMBER	OR-2186	1993796/1990453			42MT	24	8/10	12	SAE 3
REFERENCE NUMBER	OR-2187	10478998/1990418			42MT	24	6/8	11	SAE 3
REFERENCE NUMBER	OR-2189			8200433	39MT	12	8/10	12	SAE 3
REFERENCE NUMBER	OR-2191	1990483			42MT	12	6/8	11	SAE 3
REFERENCE NUMBER	OR2697	10479342			50MT	24	6/8	11	SPECIAL
REFERENCE NUMBER	OR-4263	10479013			41MT	24	8/10	12	SAE 1
REFERENCE NUMBER	OR-4272	10479343	10461744		50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	OR-5207	1990366			42MT	24	8/10	12	SAE 3
REFERENCE NUMBER	OR-5209	10478998			42MT	24	6/8	11	SAE 3
REFERENCE NUMBER	OR-5210	10478828	10461161		50MT	32	6/8	11	SAE 3
REFERENCE NUMBER	OR-5213	10479339			50MT	24	6/8	11	SAE 3
REFERENCE NUMBER	OR-5347	1990483			42MT	12	6/8	11	SAE 3
REFERENCE NUMBER	SDR0286			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	SDR0293	8200103			29MT	12	MOD 3.00	9	SAE 1
REFERENCE NUMBER	SDR0320			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	SDR0352	8200972			29MT	12	8/10	10	SAE 1
REFERENCE NUMBER	SL8206			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
REFERENCE NUMBER	SND0511			8200308	39MT	12	6/8	11	SAE 3
REFERENCE NUMBER	STA6924			8200308	39MT	12	6/8	11	SAE 3
THERMOKING	10-45-1688	93591			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	10-45-1718	93550			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	10-45-1993	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	10-45-2177	93592			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	3502221	93589			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	41044000	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-1263	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-1312	93550			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	45-1335	93553			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	45-1671	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-1688	93591			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-1718	93550			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	45-1993	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-2176	93597			REFRIGERATION/ AUX	12	0	13	0
THERMOKING	45-2177	93592			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-2323	93591			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-2324	93592			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-2325	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	45-2326	93553			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	845-1263	93584			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	845-1312	93550			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	845-1335	93553			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	845-1688	93591			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	845-1724	93553			REFRIGERATION/ AUX	12	0	15	0
THERMOKING	845-2176	93597			REFRIGERATION/ AUX	12	0	13	0
THERMOKING	845-2177	93592			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	845-2323	93591			REFRIGERATION/ AUX	12	0	9	0
THERMOKING	845-2324	93592			REFRIGERATION/ AUX	12	0	9	0

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
THERMOKING	845-2325	93584			REFRIGERATION/AUX	12	0	9	0
THERMOKING	845-2326	93553			REFRIGERATION/AUX	12	0	15	0
THERMOKING	P-25-34885-00	93598			REFRIGERATION/AUX	12	0	9	0
THERMOKING	P9610122K	93600			REFRIGERATION/AUX	12	0	9	0
VERSATILE	86060321			8200308	39MT	12	6/8	11	SAE 3
VOLVO	20851006			8200308	39MT	12	6/8	11	SAE 3
VOLVO	22398223	8201100			39MT	12	8/10	12	SAE 3
VOLVO	22809740	8200469			39MT	12	8/10	12	SAE 3
VOLVO	3165088	8200291			39MT	12	8/10	12	SAE 3
VOLVO	3165089	8200291			39MT	12	8/10	12	SAE 3
VOLVO	8113255	8200291			39MT	12	8/10	12	SAE 3
VOLVO	8113256	8200291			39MT	12	8/10	12	SAE 3
VOLVO	85103338	8200291			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	19512094		10461170		37MT	12	8/10	10	SAE 3
VOLVO-TRUCK	19512303		10461170		37MT	12	8/10	10	SAE 3
VOLVO-TRUCK	20430285	8200291			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	20469963	1990406			42MT	12	8/10	12	SAE 3
VOLVO-TRUCK	20520903			8200433	39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	20529774			8200308	39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	20711984			8200308	39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	20712113	8200469			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	20725110	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	20851008	19011530			39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	21001781	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	21001797	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	21001825	8200469			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	21019456	8201100			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	21942883			8200308	39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	21942886	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	21942889			8200308	39MT	12	6/8	11	SAE 3

Starter Index By OE Numbers

OEM	OE Numbers	DELCO REMY REPLACEMENT			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
VOLVO-TRUCK	22602987	8200469			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	22602991	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	22602994	8201100			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	24146853	8200468			39MT	12	8/10	11	SAE 1
VOLVO-TRUCK	24146857	8201100			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	24146859	8201100			39MT	12	8/10	12	SAE 3
VOLVO-TRUCK	24146870			8200308	39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	8081343	1990489			42MT	12	6/8	11	SAE 3
VOLVO-TRUCK	8081344	1990490			42MT	12	6/8	11	SAE 3
VOLVO-TRUCK	85109605			8200308	39MT	12	6/8	11	SAE 3
VOLVO-TRUCK	VV1076	8200468			39MT	12	8/10	11	SAE 1
YANMAR	119209-77010	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	119285-77010	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	119385-77010	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	121120-77010	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	121120-77011	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	124520-77010	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	124520-77011	93553			REFRIGERATION/ AUX	12	0	15	0
YANMAR	129129-77010	93597			REFRIGERATION/ AUX	12	0	13	0

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
BOSCH	0001420011			8200330	39MT	24	6/8	11	SAE 3
GMBH/GERMANY	006 151 11 01	8200019			50MT	64	6/8	11	SAE 3
GMBH/GERMANY	006 151 13 01	8200018			50MT	64	6/8	11	SAE 3
MITSUBISHI	009T70077	8200289			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	01-28168-000		10461454		28MT	12	MOD 3.00	9	SAE 1
CROSS REFERENCE	01-30196-000	10478999			41MT	12	8/10	12	SAE 3
CROSS REFERENCE	01-30196-001	10478812			41MT	12	8/10	12	SAE 3
NIKKO	0-23000-2410	8200400			29MT	12	8/10	10	SAE 1
DENSO	028000-0710	93550			REFRIGERATION/ AUX	12	0	15	0
DENSO	028000-5040	8200076			38MT	12	8/10	10	SAE 1
DENSO	028000-5730	93550			REFRIGERATION/ AUX	12	0	15	0
DENSO	028000-7640	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	028000-7830	93549			REFRIGERATION/ AUX	12	0	11	0
CROSS REFERENCE	03-0447		10465054		28MT	12	10/12	10	PAD
CROSS REFERENCE	07-01-1004	8200016			50MT	24	6/8	11	SAE 3
MITSUBISHI	07-01-1054	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	0C91R			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	1011020	8200793		8200971	39MT	12	6-8	11	0
CROSS REFERENCE	10461094RMAN		10461094		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	10461170RMAN		10461170		37MT	12	8/10	10	SAE 3
DELCO REMY/REMY	10465438	93584			REFRIGERATION/ AUX	12	0	9	0
DELCO REMY/REMY	10465440	93550			REFRIGERATION/ AUX	12	0	15	0
DELCO REMY/REMY	10465529	93594			REFRIGERATION/ AUX	12	0	9	0
DELCO REMY/REMY	10465531	93549			REFRIGERATION/ AUX	12	0	11	0
DELCO REMY/REMY	10465584	93553			REFRIGERATION/ AUX	12	0	15	0
LEECE NEVILLE	105352	8200468			39MT	12	8/10	11	SAE 1
LEECE NEVILLE	105613			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	105P60	61008898			39MT	12	8/10	11	SAE 3
CROSS REFERENCE	10D-1084-001	8200272			39MT	24	8/10	12	SAE 3
ISKRA	11.131.935	8200289			39MT	12	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
ISKRA	11.131.936	8200288		8200308	39MT	12	6/8	11	SAE 3
ISKRA	11.131.979	8200291			39MT	12	8/10	12	SAE 3
CROSS REFERENCE	1114254		10461058		37MT	12	8/10	10	SAE 3
CROSS REFERENCE	1219521H92	1993940			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	1221592H91	1990366			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	1222960H91	10478998			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	1243026H92	8200078			38MT	24	8/10	10	SAE 1
CROSS REFERENCE	12500023	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	125601			8200308	39MT	12	6/8	11	SAE 3
DENSO	128000-0140	93549			REFRIGERATION/ AUX	12	0	11	0
DENSO	128000-0141	93549			REFRIGERATION/ AUX	12	0	11	0
DENSO	128000-0210		61010421		MISC	12	0	13	0
DENSO	128000-0211		61010421		MISC	12	0	13	0
DENSO	128000-0212		61010421		MISC	12	0	13	0
DENSO	128000-0213		61010421		MISC	12	0	13	0
DENSO	128000-0214		61010421		MISC	12	0	13	0
DENSO	128000-0215		61010421		MISC	12	0	13	0
DENSO	128000-0490		61007511		MISC	12	0	11	0
DENSO	128000-0491		61007511		MISC	12	0	11	0
DENSO	128000-0492		61007511		MISC	12	0	11	0
DENSO	128000-0494		61007511		MISC	12	0	11	0
DENSO	128000-0540		61010421		MISC	12	0	13	0
DENSO	128000-0541		61010421		MISC	12	0	13	0
DENSO	128000-0542		61010421		MISC	12	0	13	0
DENSO	128000-0543		61010421		MISC	12	0	13	0
DENSO	128000-0544		61010421		MISC	12	0	13	0
DENSO	128000-0545		61010421		MISC	12	0	13	0
DENSO	128000-0710	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	128000-0740	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	128000-0741	93553			REFRIGERATION/ AUX	12	0	15	0

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	128000-134	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-1340	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-1494		61007511		MISC	12	0	11	0
DENSO	128000--2270		61010421		MISC	12	0	13	0
DENSO	128000-2273		61010421		MISC	12	0	13	0
DENSO	128000-3430	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-450	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-4500	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-4900	93594			REFRIGERATION/ AUX	12	0	9	0
DENSO	128000-4920			8200308	39MT	12	6/8	11	SAE 3
DENSO	128000-4921			8200308	39MT	12	6/8	11	SAE 3
DENSO	128000-6060			8200308	39MT	12	6/8	11	SAE 3
DENSO	128000-6280	93549			REFRIGERATION/ AUX	12	0	11	0
DENSO	128000-7650	19011402			29MT	12	10/12	10	SAE 1
DENSO	128000-8580			8200308	39MT	12	6/8	11	SAE 3
DENSO	128080-0540		61010421		MISC	12	0	13	0
DENSO	128080-0543		61010421		MISC	12	0	13	0
DENSO	128080-0544		61010421		MISC	12	0	13	0
CROSS REFERENCE	131324B	10479339			50MT	24	6/8	11	SAE 3
BOSCH	1371018			8200330	39MT	24	6/8	11	SAE 3
LESTER PIC #	140-905	1113274			28MT	12	8/10	10	SAE 1
LESTER PIC #	140-925	1113274			28MT	12	8/10	10	SAE 1
LESTER PIC #	140-935		10465150		28MT	12	10/12	10	SAE 1
LESTER PIC #	141-327		10461170		37MT	12	8/10	10	SAE 3
LESTER PIC #	141-460		10461765		29MT	NULL	NULL	NULL	0
LESTER PIC #	141-470	8200076			38MT	12	8/10	10	SAE 1
LESTER PIC #	141-472	8200005			38MT	12	8/10	12	SAE 3
LESTER PIC #	142-188	10479342			50MT	24	6/8	11	SPECIAL
LESTER PIC #	142-368	1990490			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	1531850	1990483			42MT	12	6/8	11	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CROSS REFERENCE	159134	8200005			38MT	12	8/10	12	SAE 3
LESTER	16657	93550			REFRIGERATION/ AUX	12	0	15	0
BBB REMAN	16657	93550/93553			REFRIGERATION/ AUX	12	0	15	0
LESTER	16881		61007511		MISC	12	0	11	0
LESTER	16990		61010421		MISC	12	0	13	0
CROSS REFERENCE	1702680	10479323			50MT	24	6/8	11	SAE 3
LESTER	17027	93594			REFRIGERATION/ AUX	12	0	9	0
LESTER	170-290	8200972			29MT	12	8/10	10	SAE 1
LESTER	170-290A	8200972			29MT	12	8/10	10	SAE 1
BBB REMAN	17099	93553			REFRIGERATION/ AUX	12	0	15	0
WAI-WPS NEW	17099N	93550			REFRIGERATION/ AUX	12	0	15	0
LESTER	17116	93549			REFRIGERATION/ AUX	12	0	11	0
BBB REMAN	17116	93549			REFRIGERATION/ AUX	12	0	11	0
WAI-WPS NEW	17225N	93549			REFRIGERATION/ AUX	12	0	11	0
LESTER	17367	93549			REFRIGERATION/ AUX	12	0	11	0
LESTER	17372		61010421		MISC	12	0	13	0
LESTER	17375	93553			REFRIGERATION/ AUX	12	0	15	0
WAI-WPS NEW	17375N	93553			REFRIGERATION/ AUX	12	0	15	0
LESTER	17389		61010421		MISC	12	0	13	0
LESTER	17606	93594			REFRIGERATION/ AUX	12	0	9	0
LESTER	17619	93549			REFRIGERATION/ AUX	12	0	11	0
LESTER	18013	93553			REFRIGERATION/ AUX	12	0	15	0
LESTER	18067	93584			REFRIGERATION/ AUX	12	0	9	0
BBB REMAN	18067	93584			REFRIGERATION/ AUX	12	0	9	0
WAI-WPS NEW	18067N	93584			REFRIGERATION/ AUX	12	0	9	0
LESTER	18136		61007512		MISC	12	0	11	0
LESTER	18148	93594			REFRIGERATION/ AUX	12	0	9	0
WAI-WPS NEW	18148N	93594			REFRIGERATION/ AUX	12	0	9	0
BBB REMAN	18175	93549			REFRIGERATION/ AUX	12	0	11	0
WAI-WPS NEW	18175N	93549			REFRIGERATION/ AUX	12	0	11	0

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LESTER	18277	93588			REFRIGERATION/AUX	12	0	9	0
BBB REMAN	18277	93588			REFRIGERATION/AUX	12	0	9	0
WAI-WPS NEW	18277N	93588			REFRIGERATION/AUX	12	0	9	0
LESTER	18343		61007504		MISC	12	0	10	0
LESTER	18407		61007513		MISC	12	0	11	0
LESTER	18408		61007504		MISC	12	0	10	0
MITSUBISHI	1847916	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
LESTER	18490	93591			REFRIGERATION/AUX	12	0	9	0
WAI-WPS NEW	18490N	93591			REFRIGERATION/AUX	12	0	9	0
LESTER	18500		61007505		MISC	12	0	11	0
LESTER	18516		61007509		MISC	12	0	11	0
LESTER	18556	93590			REFRIGERATION/AUX	12	0	9	0
WAI-WPS NEW	18556N	93590			REFRIGERATION/AUX	12	0	9	0
LESTER	18557	93589			REFRIGERATION/AUX	12	0	9	0
WAI-WPS NEW	18557N	93589			REFRIGERATION/AUX	12	0	9	0
MITSUBISHI	1874717	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
LESTER	18936		61010421		MISC	12	0	13	0
LESTER	18937		61007507		MISC	12	0	11	0
LESTER	19104		61007503		MISC	12	0	10	0
LESTER	19165	93600			REFRIGERATION/AUX	12	0	9	0
KUBOTA	1920263011	93549			REFRIGERATION/AUX	12	0	11	0
KUBOTA	19215-63012	93594			REFRIGERATION/AUX	12	0	9	0
KUBOTA	19215-63013	93594			REFRIGERATION/AUX	12	0	9	0
MITSUBISHI	1924505	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
KUBOTA	19460-63012	93590			REFRIGERATION/AUX	12	0	9	0
LEECE NEVILLE	19512302			8200433	39MT	12	8/10	12	SAE 3
LESTER	19618		61010421		MISC	12	0	13	0
LESTER	19638	93592			REFRIGERATION/AUX	12	0	9	0
MITSUBISHI	1974717	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
KUBOTA	19837-63010	93598			REFRIGERATION/AUX	12	0	9	0

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
KUBOTA	19837-63011	93598			REFRIGERATION/AUX	12	0	9	0
KUBOTA	19837-63012	93598			REFRIGERATION/AUX	12	0	9	0
KUBOTA	19837-63013	93598			REFRIGERATION/AUX	12	0	9	0
CROSS REFERENCE	19900483	1990483			42MT	12	6/8	11	SAE 3
LESTER	19965		61007510		MISC	12	0	11	0
LESTER	19966		61007508		MISC	12	0	11	0
KUBOTA	1E152-63011	93600			REFRIGERATION/AUX	12	0	9	0
KUBOTA	1G484-63011	93607			REFRIGERATION/AUX	12	0	9	0
KUBOTA	1G484-63012	93607			REFRIGERATION/AUX	12	0	9	0
DIXIE	200-39103			8200308	39MT	12	6/8	11	SAE 3
DIXIE	200-39112	8201100			39MT	12	8/10	12	SAE 3
DIXIE	200-39114			8200433	39MT	12	8/10	12	SAE 3
DIXIE	200-46109			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	20520903			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	20982072	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	21212425	8200436			39MT	24	MOD 3.00	12	SAE 3
WAI	2-1582-DR		10461110		37MT	12	8/10	10	SAE 1
WAI	2-1582-DR-1		10461110		37MT	12	8/10	10	SAE 1
WAI	2-1584-DR-2		10461098		37MT	12	8/10	10	SAE 1
WAI	2-1961-ND			8200308	39MT	12	6/8	11	SAE 3
BBB REMAN	22-16657	93550			REFRIGERATION/AUX	12	0	15	0
WAI	2-2206-DR		10461170		37MT	12	8/10	10	SAE 3
WAI	2-2206-DR-1		10461170		37MT	12	8/10	10	SAE 3
WAI	2-2357-DR-1	19011400	10461770		29MT	12	10/12	10	SAE 1
WAI	2-2366-DR	19011530			39MT	12	6/8	11	SAE 3
WAI	2-2372-DR	19026028/8200005	8300005		38MT	12	8/10	12	SAE 3
WAI	2-2375-DR	8200072			38MT	24	8/10	12	SAE 3
WAI	2-2375-DR-1	8200072			38MT	24	8/10	12	SAE 3
WAI	2-2377-DR	8200076	10461768		38MT	12	8/10	10	SAE 1
WAI	2-2377-DR-1	8200076	10461768		38MT	12	8/10	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WAI	2-2379-DR	8200078			38MT	24	8/10	10	SAE 1
WAI	2-2389-DR	19011403	10461772		29MT	12	MOD 3.00	9	SAE 1
WAI	2-2390-DR	8200972			29MT	12	8/10	10	SAE 1
WAI	2-2391-DR	19011409	10461765		29MT	12	10/12	10	SAE 1
BBB REMAN	22-6573		10465043		28MT	12	10/12	10	SAE 1
WAI	2-2703-DR	1990490			42MT	12	6/8	11	SAE 3
WAI	2-2704-DR-2	19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-0030	19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-0110	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-0111	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-0140	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-0141	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-0142	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-0250	93597			REFRIGERATION/ AUX	12	0	13	0
DENSO	228000-0251	93597			REFRIGERATION/ AUX	12	0	13	0
DENSO	228000-0620	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-0621	19011400/19011402	61010421		29MT	12	10/12	10	SAE 1
DENSO	228000-0660	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-0661	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-0662	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-0663	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-0664	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-1060	93594			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-1061	93594			REFRIGERATION/ AUX	12	0	9	0
DENSO	228000-1070	93549			REFRIGERATION/ AUX	12	0	11	0
DENSO	228000-1071	93549			REFRIGERATION/ AUX	12	0	11	0
DENSO	228000-1950		61010421		MISC	12	0	13	0
DENSO	228000-1951	19011400/19011402	61010421		29MT	12	10/12	10	SAE 1
DENSO	228000-1953	19011400/19011402	61010421		29MT	12	10/12	10	SAE 1
DENSO	2280001953F	19011400/19011402			29MT	12	10/12	10	SAE 1

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	228000-2800		61007512		MISC	12	0	11	0
DENSO	228000-2801		61007512		MISC	12	0	11	0
DENSO	228000-2802		61007512		MISC	12	0	11	0
DENSO	228000-2803		61007512		MISC	12	0	11	0
DENSO	228000-2804		61007512		MISC	12	0	11	0
DENSO	228000-2805		61007512		MISC	12	0	11	0
DENSO	228000-2806		61007512		MISC	12	0	11	0
DENSO	228000-2807		61007512		MISC	12	0	11	0
DENSO	228000-3800	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-3801	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-3802	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	228000-3811	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-4670		61010421		MISC	12	0	13	0
DENSO	2280004671	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-4681		61010421		MISC	12	0	13	0
DENSO	228000-5311	8200005			38MT	12	8/10	12	SAE 3
DENSO	228000-5600		61007504		MISC	12	0	10	0
DENSO	228000-5601		61007504		MISC	12	0	10	0
DENSO	228000-5602		61007504		MISC	12	0	10	0
DENSO	228000-5603		61007504		MISC	12	0	10	0
DENSO	228000-5620		61007504		MISC	12	0	10	0
DENSO	228000-5621		61007504		MISC	12	0	10	0
DENSO	228000-5622		61007504		MISC	12	0	10	0
DENSO	228000-5850	8200076			38MT	12	8/10	10	SAE 1
DENSO	228000-5851	8200076			38MT	12	8/10	10	SAE 1
DENSO	228000-6260		61007509		MISC	12	0	11	0
DENSO	228000-6261		61007509		MISC	12	0	11	0
DENSO	228000-6350	8200007			38MT	12	8/10	10	SAE 3
DENSO	228000-6380		61007507		MISC	12	0	11	0
DENSO	228000-6383		61007507		MISC	12	0	11	0

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	228000-6390		61007504		MISC	12	0	10	0
DENSO	228000-6391		61007504		MISC	12	0	10	0
DENSO	228000-6510		61007504		MISC	12	0	10	0
DENSO	228000-6511		61007504		MISC	12	0	10	0
DENSO	228000-6950	93590			REFRIGERATION/AUX	12	0	9	0
DENSO	228000-6951	93590			REFRIGERATION/AUX	12	0	9	0
DENSO	228000-6952	93590			REFRIGERATION/AUX	12	0	9	0
DENSO	228000-6980		61010421		MISC	12	0	13	0
DENSO	228000-6981		61010421		MISC	12	0	13	0
DENSO	228000-7000		61007513		MISC	12	0	11	0
DENSO	228000-7001		61007513		MISC	12	0	11	0
DENSO	228000-7002		61007513		MISC	12	0	11	0
DENSO	228000-7003		61007513		MISC	12	0	11	0
DENSO	228000-7004		61007513		MISC	12	0	11	0
DENSO	228000-7121	8200076			38MT	12	8/10	10	SAE 1
DENSO	228000-7301	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	228000-7340		61010421		MISC	12	0	13	0
DENSO	228000-7341		61010421		MISC	12	0	13	0
DENSO	228000-7342		61010421		MISC	12	0	13	0
DENSO	228000-7370	8200007			38MT	12	8/10	10	SAE 3
DENSO	228000-7371	8200007			38MT	12	8/10	10	SAE 3
DENSO	228000-8180		61007505		MISC	12	0	11	0
DENSO	228000-8181		61007505		MISC	12	0	11	0
DENSO	228000-8182		61007505		MISC	12	0	11	0
DENSO	228000-8510		10461089		37MT	12	8/10	12	SAE 3
DENSO	228080-0624		61010421		MISC	12	0	13	0
MITSUBISHI	22821042			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	2294908	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
CROSS REFERENCE	236876A1	10479010			42MT	24	6/8	11	SAE 3
MITSUBISHI	23697298	8200077			38MT	12	8/10	10	SAE 1

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DIXIE	240-20105	93591			REFRIGERATION/AUX	12	0	9	0
DIXIE	240-22105	93584			REFRIGERATION/AUX	12	0	9	0
DIXIE	240-22106	93592			REFRIGERATION/AUX	12	0	9	0
DIXIE	246-12159	93597			REFRIGERATION/AUX	12	0	13	0
DIXIE	246-14110	93549			REFRIGERATION/AUX	12	0	11	0
DIXIE	246-14114	93550			REFRIGERATION/AUX	12	0	15	0
DIXIE	246-14116	93553			REFRIGERATION/AUX	12	0	15	0
DIXIE	246-14120	93588			REFRIGERATION/AUX	12	0	9	0
DIXIE	246-14122	93594			REFRIGERATION/AUX	12	0	9	0
DIXIE	246-20103	93590			REFRIGERATION/AUX	12	0	9	0
DIXIE	246-22101	93589			REFRIGERATION/AUX	12	0	9	0
NAPA POWER PREMIUM PLUS	246-4145		10461739		50MT	24	6/8	11	SAE 3
mitsubishi	24780077			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	2478MK0077			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	2478MK1075	8200468			39MT	12	8/10	11	SAE 1
CROSS REFERENCE	250800	10478998			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	25101026	8200072			38MT	24	8/10	12	SAE 3
mitsubishi	25172289			8200308	39MT	12	6/8	11	SAE 3
WORLD WIDE	25447		10465054		28MT	12	10/12	10	PAD
CROSS REFERENCE	260807	1990413/1990366			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	268-4295	8200072			38MT	24	8/10	12	SAE 3
DENSO	280-8002	8200005			38MT	12	8/10	12	SAE 3
DENSO	2820104	8200287			39MT	12	MOD 3.00	12	SAE 3
DENSO	2820108			8200308	39MT	12	6/8	11	SAE 3
DENSO	282-0109			8200433	39MT	12	8/10	12	SAE 3
DENSO	282-0110	8201100			39MT	12	8/10	12	SAE 3
DENSO	282-0115	8200742			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	2920-01-144-880	1990453			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	2AW315	10479323			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	3043007		10461089		37MT	12	8/10	12	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CROSS REFERENCE	30A-1084-003	8200297			29MT	24	MOD 3.00	11	SAE 1
CROSS REFERENCE	3134769		10461098		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	3134770		10465043		28MT	12	10/12	10	SAE 1
CROSS REFERENCE	3134771		10465150		28MT	12	10/12	10	SAE 1
AC DELCO	323-1188		10465150		28MT	12	10/12	10	SAE 1
AC DELCO	323-437	1113274			28MT	12	8/10	10	SAE 1
AC DELCO	323-447		10465054		28MT	12	10/12	10	PAD
AC DELCO	323-482		10465239		28MT	12	8/10	10	0
AC DELCO	323-6001		10461170		37MT	12	8/10	10	SAE 3
AC DELCO	323-6004		10461169		37MT	12	8/10	12	SAE 3
AC DELCO	323-6005		10465043		28MT	12	10/12	10	SAE 1
AC DELCO	323-761		10461739		50MT	24	6/8	11	SAE 3
AC DELCO	323-766		10461161		50MT	32	6/8	11	SAE 3
AC DELCO	323-840		10461058		37MT	12	8/10	10	SAE 3
AC DELCO	323-842		10461089		37MT	12	8/10	12	SAE 3
AC DELCO	323-858	10478998			42MT	24	6/8	11	SAE 3
AC DELCO	323-859	1993796/1990453			42MT	24	8/10	12	SAE 3
AC DELCO	323-866	1990447			42MT	24	6/8	11	SAE 3
AC DELCO	323-867	1990483			42MT	12	6/8	11	SAE 3
AC DELCO	323-871	1990490			42MT	12	6/8	11	SAE 3
AC DELCO	323-873	1990489			42MT	12	6/8	11	SAE 3
AC DELCO	323-874	1990406			42MT	12	8/10	12	SAE 3
AC DELCO	323-878	1993788			42MT	24	6/8	11	SAE 3
AC DELCO	323-879		10461098		37MT	12	8/10	10	SAE 1
AC DELCO	323-880		10461110		37MT	12	8/10	10	SAE 1
AC DELCO	323-885		10461225		37MT	12	8/10	10	SAE 1
AC DELCO	323-887		10461207		37MT	12	8/10	10	SAE 1
AC DELCO	323-897	10478999	10461171		41MT	12	8/10	12	SAE 3
AC DELCO	323-901		10461170		37MT	12	8/10	10	SAE 3
AC DELCO	323-908		10461277		37MT	12	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
AC DELCO	323-910		10461089		37MT	12	8/10	12	SAE 3
AC DELCO	323-915		10461298		37MT	12	8/10	10	SAE 1
AC DELCO	323-934	10479010			42MT	24	6/8	11	SAE 3
AC DELCO	323-938	10478829	10461160		50MT	64	6/8	11	SAE 3
AC DELCO	323-939	10478830			50MT	64	6/8	11	SAE 3
AC DELCO	323-942		10461744		50MT	24	6/8	11	SAE 3
AC DELCO	323-950		10461416		37MT	12	8/10	10	SAE 1
AC DELCO	323-951	10479013			41MT	24	8/10	12	SAE 1
AC DELCO	323-957		10461739		50MT	24	6/8	11	SAE 3
CROSS REFERENCE	3247541	10478999			41MT	12	8/10	12	SAE 3
CROSS REFERENCE	3281634			8200435	39MT	24	8/10	12	SAE 3
CROSS REFERENCE	335882	1990483			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	3363945	10478812			41MT	12	8/10	12	SAE 3
CROSS REFERENCE	3464499	10479330			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	3464499R		10461744		50MT	24	6/8	11	SAE 3
PRESTOLITE	35258820		10465239		28MT	12	8/10	10	0
LEECE NEVILLE	35259500	8200972			29MT	12	8/10	10	SAE 1
PRESTOLITE	35259550		10465150		28MT	12	10/12	10	SAE 1
LEECE NEVILLE	35259550S		10465150		28MT	12	10/12	10	SAE 1
PRESTOLITE	35259620		10465043		28MT	12	10/12	10	SAE 1
PRESTOLITE	35259730		10461169		37MT	12	8/10	12	SAE 3
LEECE NEVILLE	35259820	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	35259840		10461170		37MT	12	8/10	10	SAE 3
PRESTOLITE	35259840		10461170		37MT	12	8/10	10	SAE 3
PRESTOLITE	35260830		10461298		37MT	12	8/10	10	SAE 1
PRESTOLITE	35260900		10461298		37MT	12	8/10	10	SAE 1
PRESTOLITE	35261050		10461089		37MT	12	8/10	12	SAE 3
LEECE NEVILLE	35261110	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
LEECE NEVILLE	35261680	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	35261680S	8200972			29MT	12	8/10	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LEECE NEVILLE	35261690	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	35261690S	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	35262430	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	35262470	8200972			29MT	12	8/10	10	SAE 1
CROSS REFERENCE	3543010	10479328			50MT	12	6/8	11	SAE 3
CROSS REFERENCE	3565328	19011530			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	3675167		10461094		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	3675173		10465150		28MT	12	10/12	10	SAE 1
CROSS REFERENCE	372958	8200529			42MT	24	8/10	12	SAE 3
LEECE NEVILLE	3804481	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	3804481C91	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	3804481C92	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	3808509C92	19026028			38MT	12	8/10	12	SAE 3
CROSS REFERENCE	3915544		10461089		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	3919015		10461169		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	3945699		10461110		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	3949536			8200433	39MT	12	8/10	12	SAE 3
DENSO	3957586		61010421		MISC	12	0	13	0
CROSS REFERENCE	40069492	10478827			50MT	32	6/8	11	SAE 3
J&N Electric	410-44064	93592			REFRIGERATION/ AUX	12	0	9	0
CROSS REFERENCE	416.04.1210.902	10479130			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	416.04.1210.92	10479130			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	41SX309	1990453			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	42610461058		10461058		37MT	12	8/10	10	SAE 3
CROSS REFERENCE	42610461089		10461089		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	42610461098		10461098		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	42610461110		10461110		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	42610461169		10461169		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	42610461170		10461170		37MT	12	8/10	10	SAE 3
CROSS REFERENCE	42610461171		10461171		41MT	12	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CROSS REFERENCE	42610461207		10461207		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	42610461225		10461225		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	42610461282		10461282		41MT	12	8/10	12	SAE 1
CROSS REFERENCE	42610461772		10461772		29MT	12	MOD 3.00	9	SAE 1
CROSS REFERENCE	42610465043		10465043		28MT	12	10/12	10	SAE 1
CROSS REFERENCE	42610465150		10465150		28MT	12	10/12	10	SAE 1
CROSS REFERENCE	42610465239		10465239		28MT	12	8/10	10	0
CROSS REFERENCE	4261990483	1990483			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	4261990490	1990490			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	4268200289	8200289			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	4268200290	8200290			39MT	12	6/8	11	SAE 3
DENSO	428000-0071	8200972			29MT	12	8/10	10	SAE 1
DENSO	428000-0190		61010421		MISC	12	0	13	0
DENSO	428000-0191		61010421		MISC	12	0	13	0
DENSO	428000-0310		10461454		28MT	12	MOD 3.00	9	SAE 1
DENSO	428000-0930	93589			REFRIGERATION/ AUX	12	0	9	0
DENSO	428000-0931	93589			REFRIGERATION/ AUX	12	0	9	0
DENSO	4280001210			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-1211	8200289		8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-1212			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-1231			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-1422			8200433	39MT	12	8/10	12	SAE 3
DENSO	428000-1451			8200330	39MT	24	6/8	11	SAE 3
DENSO	4280001600	19011400			29MT	12	10/12	10	SAE 1
DENSO	4280001610	8201002/8200076			38MT	12	8/10	12	SAE 1
DENSO	428000-1850	19011400/19011402	61010421		29MT	12	10/12	10	SAE 1
DENSO	428000-1860	19011400/19011402	61010421		29MT	12	10/12	10	SAE 1
DENSO	428000-1870		61010421		MISC	12	0	13	0
DENSO	4280001881	8200103			29MT	12	MOD 3.00	9	SAE 1
DENSO	428000-2500		61007510		MISC	12	0	11	0

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	428000-2501		61007510		MISC	12	0	11	0
DENSO	428000-2502		61007510		MISC	12	0	11	0
DENSO	428000-2503		61007510		MISC	12	0	11	0
DENSO	428000-2510		61007508		MISC	12	0	11	0
DENSO	428000-2511		61007508		MISC	12	0	11	0
DENSO	428000-2690	8200005			38MT	12	8/10	12	SAE 3
DENSO	428000-2910		61007503		MISC	12	0	10	0
DENSO	428000-2920		61007503		MISC	12	0	10	0
DENSO	428000-4420			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-4430			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-4440			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-4450	8200287			39MT	12	MOD 3.00	12	SAE 3
DENSO	428000-4451	8200287			39MT	12	MOD 3.00	12	SAE 3
DENSO	4280005120	8200077			38MT	12	8/10	10	SAE 1
DENSO	428000-5170			8200308	39MT	12	6/8	11	SAE 3
DENSO	428000-5190	8200290		8200308	39MT	12	6/8	11	SAE 3
DENSO	4280005230	61006210			31MT	12	8/10	10	SAE 1
DENSO	428000-5310	8200077			38MT	12	8/10	10	SAE 1
DENSO	428000-5430			8200433	39MT	12	8/10	12	SAE 3
DENSO	428000-5730			8200308	39MT	12	6/8	11	SAE 3
DENSO	4280005920	8200077			38MT	12	8/10	10	SAE 1
DENSO	428000-709	8200077			38MT	12	8/10	10	SAE 1
DENSO	428000-7090	8200077			38MT	12	8/10	10	SAE 1
DENSO	428000-7870	8200005			38MT	12	8/10	12	SAE 3
DENSO	428000-8400	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	428000-8470	8200103			29MT	12	MOD 3.00	9	SAE 1
DENSO	428000-8690			8200434	39MT	12	MOD 3.00	12	SAE 3
DENSO	428000-9340	8200077			38MT	12	8/10	10	SAE 1
DENSO	428001610	8201002/8200076			38MT	12	8/10	12	SAE 1
DENSO	428004420			8200308	39MT	12	6/8	11	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	428005120	8201002/8200076			38MT	12	8/10	12	SAE 1
DENSO	428005230	8200077			38MT	12	8/10	10	SAE 1
DENSO	428080-2870		61007503		MISC	12	0	10	0
DENSO	4286005120	8200077			38MT	12	8/10	10	SAE 1
DENSO	438000-311	8200077			38MT	12	8/10	10	SAE 1
DENSO	438000-3110	8200077			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	4503M		10465150		28MT	12	10/12	10	SAE 1
LEECE NEVILLE	4503ME		10465150		28MT	12	10/12	10	SAE 1
NAPA POWER SUPREME	46-4145		10461739		50MT	24	6/8	11	SAE 3
RAYLOC	46-7050			8200308	39MT	12	6/8	11	SAE 3
RAYLOC	46-7050O			8200308	39MT	12	6/8	11	SAE 3
CROSS REFERENCE	4822105	1990453			42MT	24	8/10	12	SAE 3
BBB REMAN	4927		10461739		50MT	24	6/8	11	SAE 3
BBB REMAN	4930		10461739		50MT	24	6/8	11	SAE 3
BBB REMAN	4992		10461739		50MT	24	6/8	11	SAE 3
DENSO	4996706	8200077			38MT	12	8/10	10	SAE 1
DENSO	4996708	8200077			38MT	12	8/10	10	SAE 1
MITSUBISHI	4C91R			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	4N1064			8200308	39MT	12	6/8	11	SAE 3
CROSS REFERENCE	5003082	1990366			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	5008530	10479130			42MT	24	6/8	11	SAE 3
WAI	50-107		10461738		50MT	12	6/8	11	SAE 3
WAI	50-111	10479323			50MT	24	6/8	11	SAE 3
WAI	50-111-1	10479323			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	5012737	1990447			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	5014056	10479228			42MT	24	8/10	12	SAE 3
WAI	50-151			8200330	39MT	24	6/8	11	SAE 3
WAI	50-151-1			8200330	39MT	24	6/8	11	SAE 3
WAI	50-151-2			8200330	39MT	24	6/8	11	SAE 3
WAI	50-151-3			8200330	39MT	24	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WAI	50-152	1990453			42MT	24	8/10	12	SAE 3
WAI	50-152-1	1990453			42MT	24	8/10	12	SAE 3
WAI	50-152-2	1990453			42MT	24	8/10	12	SAE 3
WAI	50-153	1990483			42MT	12	6/8	11	SAE 3
WAI	50-153-1	1990483			42MT	12	6/8	11	SAE 3
WAI	50-153-2	1990483			42MT	12	6/8	11	SAE 3
WAI	50-161-1		10461225		37MT	12	8/10	10	SAE 1
WAI	50-162		10461089		37MT	12	8/10	12	SAE 3
WAI	50-162-1		10461089		37MT	12	8/10	12	SAE 3
WAI	50-193		10461058		37MT	12	8/10	10	SAE 3
WAI	50-193-1		10461058		37MT	12	8/10	10	SAE 3
WAI	50-194		10461098		37MT	12	8/10	10	SAE 1
WAI	50-194-1		10461098		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	5029764	1993788			42MT	24	6/8	11	SAE 3
LEECE NEVILLE	5034-M110603			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	5034-M110R2601SE			8200434	39MT	12	MOD 3.00	12	SAE 3
CROSS REFERENCE	50502006	1993788			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	50502007	1990418			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	50702503	10479130			42MT	24	6/8	11	SAE 3
WAI	50-8402-2		10465054		28MT	12	10/12	10	PAD
WAI	50-8405	1113274			28MT	12	8/10	10	SAE 1
WAI	50-8407		10465043		28MT	12	10/12	10	SAE 1
WAI	50-8428		10465150		28MT	12	10/12	10	SAE 1
WAI	50-8431	1113274			28MT	12	8/10	10	SAE 1
WAI	50-8437		10465043		28MT	12	10/12	10	SAE 1
MITSUBISHI	510751			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	510752			8200330	39MT	24	6/8	11	SAE 3
DENSO	5-128000-980	8200077			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	5259820S	8200972			29MT	12	8/10	10	SAE 1
CROSS REFERENCE	53-19322-018	10479130			42MT	24	6/8	11	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CROSS REFERENCE	53-19322-026	10479228			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	53-19322-18	10479130			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	53-19322-19	10479130			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	53-19332-026	10479228			42MT	24	8/10	12	SAE 3
DENSO	5702800-764	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	5712800-074	93553			REFRIGERATION/ AUX	12	0	15	0
CROSS REFERENCE	5KK893	19011530			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	610-1084-001	8200068			42MT	24	8/10	12	SAE 3
mitsubishi	611003001	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
WORLD WIDE	61274		10465043		28MT	12	10/12	10	SAE 1
WORLD WIDE	61276		10465150		28MT	12	10/12	10	SAE 1
WORLD WIDE	61500		10461739		50MT	24	6/8	11	SAE 3
mitsubishi	616005003			8200308	39MT	12	6/8	11	SAE 3
LESTER	6263			8200308	39MT	12	6/8	11	SAE 3
BBB REMAN	6289		10461089		37MT	12	8/10	12	SAE 3
BBB REMAN	6297		10461170		37MT	12	8/10	10	SAE 3
WORLD WIDE	63100		10461225		37MT	12	8/10	10	SAE 1
WORLD WIDE	63108		10461058		37MT	12	8/10	10	SAE 3
WORLD WIDE	63114		10461089		37MT	12	8/10	12	SAE 3
WORLD WIDE	63117		10461098		37MT	12	8/10	10	SAE 1
WORLD WIDE	63119		10461110		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	63133		10461169		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	63134		10461170		37MT	12	8/10	10	SAE 3
WORLD WIDE	63146		10465239		28MT	12	8/10	10	0
WORLD WIDE	63233		10461416		37MT	12	8/10	10	SAE 1
CROSS REFERENCE	6323927	8200078			38MT	24	8/10	10	SAE 1
BBB REMAN	6348		10461058		37MT	12	8/10	10	SAE 3
LESTER	6352			8200308	39MT	12	6/8	11	SAE 3
LESTER	6360	1990453			42MT	24	8/10	12	SAE 3
LESTER	6361	1990366			42MT	24	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LESTER	6380		10461089		37MT	12	8/10	12	SAE 3
LESTER	6382		10461225		37MT	12	8/10	10	SAE 1
WAI	6382N-PT		10461225		37MT	12	8/10	10	SAE 1
BBB REMAN	6393		10461089		37MT	12	8/10	12	SAE 3
LESTER	6398		10461058		37MT	12	8/10	10	SAE 3
BBB REMAN	6400		10461169		37MT	12	8/10	12	SAE 3
LESTER	6469		10465054		28MT	12	10/12	10	PAD
LESTER	6504		10461110		37MT	12	8/10	10	SAE 1
BBB REMAN	6504		10461110		37MT	12	8/10	10	SAE 1
USA REMAN	6504		10461110		37MT	12	8/10	10	SAE 1
LESTER	6505		10461098		37MT	12	8/10	10	SAE 1
BBB REMAN	6505		10461098		37MT	12	8/10	10	SAE 1
USA REMAN	6505		10461098		37MT	12	8/10	10	SAE 1
BBB REMAN	6573		10465043		28MT	12	10/12	10	SAE 1
USA REMAN	6573		10465043		28MT	12	10/12	10	SAE 1
LESTER	6602		10465239		28MT	12	8/10	10	0
BBB REMAN	6602		10465239		28MT	12	8/10	10	0
USA REMAN	6613		10461171		41MT	12	8/10	12	SAE 3
BBB REMAN	6617	10478812			41MT	12	8/10	12	SAE 3
BBB REMAN	6630	10478812			41MT	12	8/10	12	SAE 3
LESTER	6661		10461298		37MT	12	8/10	10	SAE 1
LESTER	6667		10461282		41MT	12	8/10	12	SAE 1
BBB REMAN	6667		10461282		41MT	12	8/10	12	SAE 1
LESTER	6668		10461431		41MT	12	8/10	12	SAE 1
LESTER	6752		10461298		37MT	12	8/10	10	SAE 1
LESTER	6780	1993796/1990413			42MT	24	8/10	12	SAE 3
LESTER	6807		10461768		38MT	12	8/10	10	SAE 1
WAI	6809N	8200077	8300024		38MT	12	8/10	10	SAE 1
USA REMAN	6834	8200007			38MT	12	8/10	10	SAE 3
LESTER	6837			8200330	39MT	24	6/8	11	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WAI	6837N			8200330	39MT	24	6/8	11	SAE 3
LESTER	6841	19011402			29MT	12	10/12	10	SAE 1
WAI	6841N	19011402			29MT	12	10/12	10	SAE 1
USA REMAN	6859	8200005			38MT	12	8/10	12	SAE 3
LESTER	6907			8200433	39MT	12	8/10	12	SAE 3
WAI	6907N			8200433	39MT	12	8/10	12	SAE 3
USA REMAN	6910	8200287			39MT	12	MOD 3.00	12	SAE 3
LESTER	6924			8200308	39MT	12	6/8	11	SAE 3
WAI	6924N			8200308	39MT	12	6/8	11	SAE 3
CROSS REFERENCE	70502022	10479228			42MT	24	8/10	12	SAE 3
LEECE NEVILLE	7073ME			8200435	39MT	24	8/10	12	SAE 3
MITSUBISHI	71-01-1008			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	71-01-1043			8200330	39MT	24	6/8	11	SAE 3
CROSS REFERENCE	752642440	8200078			38MT	24	8/10	10	SAE 1
CROSS REFERENCE	7G-1-39	10478998/1990418			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	7L-1-54	10478998			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	7L-1-80	10479339			50MT	24	6/8	11	SAE 3
LEECE NEVILLE	7N0923	8200076			38MT	12	8/10	10	SAE 1
CROSS REFERENCE	800289	8200289			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	82001 3427	1990490			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	82001-0107	1990406			42MT	12	8/10	12	SAE 3
CROSS REFERENCE	82001-3458	1990489			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	82001-3471	10478999			41MT	12	8/10	12	SAE 3
CROSS REFERENCE	82-07586-000	1990483			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	82-14983	1990447			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	82-15441	10478998			42MT	24	6/8	11	SAE 3
MITSUBISHI	82378			8200330	39MT	24	6/8	11	SAE 3
CROSS REFERENCE	82-45059-000	8200068			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	8428605		10461160		50MT	64	6/8	11	SAE 3
MITSUBISHI	84716152	8200793		8200971	39MT	12	6/8	11	0

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
CROSS REFERENCE	85103101	1990406			42MT	12	8/10	12	SAE 3
CROSS REFERENCE	85107010	10478998			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	85110112		10461739		50MT	24	6/8	11	SAE 3
CROSS REFERENCE	85111056		10461738		50MT	12	6/8	11	SAE 3
LEECE NEVILLE	85124897			8200308	39MT	12	6/8	11	SAE 3
CROSS REFERENCE	86034167	8200077			38MT	12	8/10	10	SAE 1
CROSS REFERENCE	87038474	8200014			29MT	12	8/10	10	SAE 1
AC DELCO	88860418		10461170		37MT	12	8/10	10	SAE 3
AC DELCO	88860425		10465043		28MT	12	10/12	10	SAE 1
AC DELCO	88860778		10461169		37MT	12	8/10	12	SAE 3
AC DELCO	89049247	10479339			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	8C-3596			8200433	39MT	12	8/10	12	SAE 3
PRESTOLITE	8MJ4291	10479328			50MT	12	6/8	11	SAE 3
MITSUBISHI	8MJ4298AM			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	8MJ5439M	8200289			39MT	12	6/8	11	SAE 3
WILSON	91-01-3700			8200330	39MT	24	6/8	11	SAE 3
WILSON	91-01-3700N			8200330	39MT	24	6/8	11	SAE 3
WILSON	91-01-3701	1990483		8200308	42MT	12	6/8	11	SAE 3
WILSON	91-01-3701N	1990483		8200308	42MT	12	6/8	11	SAE 3
WILSON	91-01-3702			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-3948		10461739		50MT	24	6/8	11	SAE 3
WILSON	91-01-3948N		10461739		50MT	24	6/8	11	SAE 3
WILSON	91-01-4111	10479342			50MT	24	6/8	11	SPECIAL
WILSON	91-01-4111N	10479342			50MT	24	6/8	11	SPECIAL
WILSON	91-01-4148	8200076	10461225		38MT	12	8/10	10	SAE 1
WILSON	91-01-4157	1990418			42MT	24	6/8	11	SAE 3
WILSON	91-01-4158N	1993796			42MT	24	8/10	12	SAE 3
WILSON	91-01-4159N	10478998			42MT	24	6/8	11	SAE 3
WILSON	91-01-4161			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4161N			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WILSON	91-01-4165		10461058		37MT	12	8/10	10	SAE 3
WILSON	91-01-4167		10461089		37MT	12	8/10	12	SAE 3
WILSON	91-01-4285		10461089		37MT	12	8/10	12	SAE 3
WILSON	91-01-4293		10461416		37MT	12	8/10	10	SAE 1
WILSON	91-01-4295			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4296			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4307	8200076			38MT	12	8/10	10	SAE 1
WILSON	91-01-4307N	8200076			38MT	12	8/10	10	SAE 1
WILSON	91-01-4311	1113274			28MT	12	8/10	10	SAE 1
WILSON	91-01-4313	19011400			29MT	12	10/12	10	SAE 1
WILSON	91-01-4313n	19011400			29MT	12	10/12	10	SAE 1
WILSON	91-01-4354		10465150		28MT	12	10/12	10	SAE 1
WILSON	91-01-4356	19011402			29MT	12	10/12	10	SAE 1
WILSON	91-01-4364	1113274			28MT	12	8/10	10	SAE 1
WILSON	91-01-4378		10465239		28MT	12	8/10	10	0
WILSON	91-01-4396		10461169	8200433	37MT	12	8/10	12	SAE 3
WILSON	91-01-4407	1990406		8200433	42MT	12	8/10	12	SAE 3
WILSON	91-01-4409		10461110		37MT	12	8/10	10	SAE 1
WILSON	91-01-4438	10478827			50MT	32	6/8	11	SAE 3
WILSON	91-01-4455	8200007			38MT	12	8/10	10	SAE 3
WILSON	91-01-4466	10478812		8200433	41MT	12	8/10	12	SAE 3
WILSON	91-01-4466N	10478812		8200433	41MT	12	8/10	12	SAE 3
WILSON	91-01-4468			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4508			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4508N			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4526		10461496		41MT	12	8/10	12	SAE 1
WILSON	91-01-4527		10461431		41MT	12	8/10	12	SAE 1
WILSON	91-01-4542	10479228			42MT	24	8/10	12	SAE 3
WILSON	91-01-4545		10461481		28MT	12	10/12	10	SAE 1
WILSON	91-01-4548	19011402			29MT	12	10/12	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WILSON	91-01-4560		10461298		37MT	12	8/10	10	SAE 1
WILSON	91-01-4563	8200103			29MT	12	MOD 3.00	9	SAE 1
WILSON	91-01-4564		10461454		28MT	12	MOD 3.00	9	SAE 1
WILSON	91-01-4564N		10461454		28MT	12	MOD 3.00	9	SAE 1
WILSON	91-01-4566		10461768		38MT	12	8/10	10	SAE 1
WILSON	91-01-4580	19011400	10461770		29MT	12	10/12	10	SAE 1
WILSON	91-01-4580N	61005265			31MT	12	10/12	10	SAE 1
WILSON	91-01-4588	19011409			29MT	12	10/12	10	SAE 1
WILSON	91-01-4593	19011402			29MT	12	10/12	10	SAE 1
WILSON	91-01-4597	8200972			29MT	12	8/10	10	SAE 1
WILSON	91-01-4607	8200075			38MT	12	MOD 3.00	11	SAE 1
WILSON	91-01-4622			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4622N			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4623	61006210/8200077			31MT	12	8/10	10	SAE 1
WILSON	91-01-4625			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4630			8200434	39MT	12	MOD 3.00	12	SAE 3
WILSON	91-01-4631			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4632			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4707	10478999	10461171		41MT	12	8/10	12	SAE 3
WILSON	91-01-4710	8200287			39MT	12	MOD 3.00	12	SAE 3
WILSON	91-01-4712			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4713			8200308	39MT	12	6/8	11	SAE 3
WILSON	91014713N			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4747			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4759			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4759N			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-01-4760			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-01-4760N			8200433	39MT	12	8/10	12	SAE 3
WILSON	91014761			8200434	39MT	12	MOD 3.00	12	SAE 3
WILSON	91014761N			8200434	39MT	12	MOD 3.00	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WILSON	91-01-4763			8200330	39MT	24	6/8	11	SAE 3
WILSON	91-01-4805	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
WILSON	91014808N	61008898			39MT	12	8/10	11	SAE 3
WILSON	91014819	8200077			38MT	12	8/10	10	SAE 1
WILSON	91-04-7803			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-04-7803N			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-04-7810	19011400/8200972			29MT	12	10/12	10	SAE 1
WILSON	91-04-7812			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-04-7814	8200972			29MT	12	8/10	10	SAE 1
WILSON	91-04-7823			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-04-7830	8200972			29MT	12	8/10	10	SAE 1
WILSON	91-04-7832			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-10-4763N			8200330	39MT	24	6/8	11	SAE 3
WILSON	91-25-1048	93584			REFRIGERATION/ AUX	12	0	9	0
WILSON	91-25-1048N	93584			REFRIGERATION/ AUX	12	0	9	0
WILSON	91-25-1170	93591			REFRIGERATION/ AUX	12	0	9	0
WILSON	91-25-1170N	93591			REFRIGERATION/ AUX	12	0	9	0
WILSON	91-27-3305			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-27-3305N			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-27-3306			8200330	39MT	24	6/8	11	SAE 3
WILSON	91-27-3390			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3398			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-27-3415			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3417			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3417N			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3423			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3423N			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-27-3424			8200434	39MT	12	MOD 3.00	12	SAE 3
WILSON	91-27-3566			8200433	39MT	12	8/10	12	SAE 3
WILSON	91-29-5042	93550			REFRIGERATION/ AUX	12	0	15	0

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WILSON	91-29-5107	93549			REFRIGERATION/AUX	12	0	11	0
WILSON	91-29-5108		61007511		MISC	12	0	11	0
WILSON	91-29-5138		61010421		MISC	12	0	13	0
WILSON	91-29-5140	93553			REFRIGERATION/AUX	12	0	15	0
WILSON	91-29-5147	93594			REFRIGERATION/AUX	12	0	9	0
WILSON	91-29-5202	93553			REFRIGERATION/AUX	12	0	15	SAE 3
WILSON	91-29-5394	19011402			29MT	12	10/12	10	0
WILSON	91-29-5405	93588			REFRIGERATION/AUX	12	0	9	0
WILSON	91-29-5432	93590			REFRIGERATION/AUX	12	0	9	SAE 3
WILSON	91-29-5441		61007512		MISC	12	0	11	SAE 3
WILSON	91-29-5449		10461089		37MT	12	8/10	12	SAE 3
WILSON	91-29-5449N		10461089		37MT	12	8/10	12	SAE 3
WILSON	91-29-5464		61007504		MISC	12	0	10	SAE 3
WILSON	91-29-5515		61007505		MISC	12	0	11	SAE 1
WILSON	91-29-5518		61007509		MISC	12	0	11	SAE 3
WILSON	91-29-5519		61007507		MISC	12	0	11	SAE 3
WILSON	91-29-5530		61007513		MISC	12	0	11	SAE 1
WILSON	91-29-5534			8200308	39MT	12	6/8	11	SAE 1
WILSON	91-29-5550			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-29-5568	8200007			38MT	12	8/10	10	SAE 3
WILSON	91-29-5581		61010421		MISC	12	0	13	SAE 1
WILSON	91-29-5616		61010421		MISC	12	0	13	SAE 1
WILSON	91-29-5623	93589			REFRIGERATION/AUX	12	0	9	SAE 1
WILSON	91-29-5627	19011402			29MT	12	10/12	10	SAE 3
WILSON	91-29-5648			8200308	39MT	12	6/8	11	SAE 1
WILSON	91-29-5683		61007503		MISC	12	0	10	SAE 1
WILSON	91295688			8200308	39MT	12	6/8	11	SAE 3
WILSON	91-29-5689			8200433	39MT	12	8/10	12	SAE 1
WILSON	91-29-5691			8200434	39MT	12	MOD 3.00	12	SAE 1
WILSON	91-29-5835	8200077			38MT	12	8/10	10	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
WORLD WIDE	91-29-5867		61007510		MISC	12	0	11	0
WILSON	91-29-5868		61007508		MISC	12	0	11	0
WILSON	91295916	61006210			31MT	12	8/10	10	SAE 1
WILSON	91295920	8200077			38MT	12	8/10	10	SAE 1
WILSON	91-41-3104	19011400	10465043		29MT	12	10/12	10	SAE 1
CROSS REFERENCE	9553075		10461161		50MT	32	6/8	11	SAE 3
MITSUBISHI	970379	8200287			39MT	12	MOD 3.00	12	SAE 3
DENSO	9712809-049		61007511		MISC	12	0	11	0
DENSO	9712809-071	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	9712809-074	93553			REFRIGERATION/ AUX	12	0	15	0
DENSO	9717809-049		61007511		MISC	12	0	11	0
CROSS REFERENCE	9720300	10478812			41MT	12	8/10	12	SAE 3
DENSO	9722809066	93588			REFRIGERATION/ AUX	12	0	9	0
DENSO	9722809-106	93594			REFRIGERATION/ AUX	12	0	9	0
DENSO	9722809-695	93590			REFRIGERATION/ AUX	12	0	9	0
DENSO	9742809-093	93589			REFRIGERATION/ AUX	12	0	9	0
CROSS REFERENCE	9968591	10478998			42MT	24	6/8	11	SAE 3
MITSUBISHI	9T73778	8200793		8200971	39MT	12	6-8	11	0
CROSS REFERENCE	A0061515101	8200103			29MT	12	MOD 3.00	9	SAE 1
CROSS REFERENCE	A8200008-001	19011530			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	A8200011-001	8200077			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	ABP N15 M105611	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	ABP N15 M110601			8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	ABP N15 M110603			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	AM84479			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	AM84579			8200435	39MT	24	8/10	12	SAE 3
MITSUBISHI	AM85679	8200436			39MT	24	MOD 3.00	12	SAE 3
DENSO	AS228000-1953	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	AS228000-3811	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	AS2280004671	19011400/19011402			29MT	12	10/12	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	AS428000-0310		10461454		28MT	12	MOD 3.00	9	SAE 1
DENSO	AS4280001600	19011400			29MT	12	10/12	10	SAE 1
CROSS REFERENCE	D03-10461171		10461171		41MT	12	8/10	12	SAE 3
mitsubishi	D61-1003	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	D611003001	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	D61-1003-01	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	D61-1007	8200077			38MT	12	8/10	10	SAE 1
mitsubishi	D61-1008			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	D61-6002-006	8200077			38MT	12	8/10	10	SAE 1
mitsubishi	D61-6002-009	8200005		8200433	38MT	12	8/10	12	SAE 3
mitsubishi	D616002011	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	D616005			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	D61600500			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	D6160050003			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	D61-6005-004	8200077			38MT	12	8/10	10	SAE 1
mitsubishi	D6160056003			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	DPS60	61008898			39MT	12	8/10	11	SAE 3
CROSS REFERENCE	DR10461277		10461277		37MT	12	8/10	12	SAE 3
CROSS REFERENCE	DR10461282		10461282		41MT	12	8/10	12	SAE 1
CROSS REFERENCE	DR10479283	10479283			41MT	12	MOD 3.00	11	SAE 1
CROSS REFERENCE	DR1990483	1990483			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	DR1990489	1990489			42MT	12	6/8	11	SAE 3
CROSS REFERENCE	DR-8200290	8200290			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	DR8200297	8200297			29MT	24	MOD 3.00	11	SAE 1
BERMAN (EUROPE)	DS-10	1990483/ 1990489/1990490			42MT	12	6/8	11	SAE 3
BERMAN (EUROPE)	DS-11	1990406			42MT	12	8/10	12	SAE 3
BERMAN (EUROPE)	DS-37	1990418			42MT	24	6/8	11	SAE 3
BERMAN (EUROPE)	DS-38	1993796/1990453/ 1990413/1990366			42MT	24	8/10	12	SAE 3
mitsubishi	FL0189			8200434	39MT	12	MOD 3.00	12	SAE 3
mitsubishi	FL0379	8200287			39MT	12	MOD 3.00	12	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
mitsubishi	FL0579			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	FL0777			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	FL0975			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	FL1179	8200287			39MT	12	MOD 3.00	12	SAE 3
mitsubishi	FLA0579			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	FLA0777			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	FLA1179	8200287			39MT	12	MOD 3.00	12	SAE 3
mitsubishi	FLA579	61008898			39MT	12	8/10	11	SAE 3
leece neville	FLT2004291			8200434	39MT	12	MOD 3.00	12	SAE 3
CROSS REFERENCE	G1016386	1993796			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	G10163867	1993796			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	G1017979	10479130			42MT	24	6/8	11	SAE 3
mitsubishi	IN0971	8200077			38MT	12	8/10	10	SAE 1
mitsubishi	IN0976	8200289			39MT	12	6/8	11	SAE 3
mitsubishi	IN1378			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	IN1478			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	IN2178			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	IN3179			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	INO971	8200077			38MT	12	8/10	10	SAE 1
CROSS REFERENCE	KK0104001	10478998			42MT	24	6/8	11	SAE 3
mitsubishi	KW0779	8200290			39MT	12	6/8	11	SAE 3
leece neville	LMN105602			8200433	39MT	12	8/10	12	SAE 3
prestolite	LMN125601			8200308	39MT	12	6/8	11	SAE 3
leece neville	LN M105R2511SE	8200076			38MT	12	8/10	10	SAE 1
leece neville	LN M110603			8200308	39MT	12	6/8	11	SAE 3
leece neville	LN105602			8200433	39MT	12	8/10	12	SAE 3
leece neville	LNM105302			8200433	39MT	12	8/10	12	SAE 3
leece neville	LNM105322	19026028			38MT	12	8/10	12	SAE 3
leece neville	LNM105352	8200468			39MT	12	8/10	11	SAE 1
leece neville	LNM105611	8200076			38MT	12	8/10	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LEECE NEVILLE	LNM105612	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
LEECE NEVILLE	LNM105613			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	LNM105R2503SE	19011407/8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	LNM110601			8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	LNM110R2603SE			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	LNM125601			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M0017073ME			8200435	39MT	24	8/10	12	SAE 3
MITSUBISHI	M003T70681	93600			REFRIGERATION/AUX	12	0	9	0
MITSUBISHI	M008T71872	93607			REFRIGERATION/AUX	12	0	9	0
MITSUBISHI	M009A7269			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009D70979			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T0077	8200288			39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T50971ZX	8200077			38MT	12	8/10	10	SAE 1
MITSUBISHI	M009T62571	8200357			29MT	24	MOD 3.00	10	SAE 1
MITSUBISHI	M009T62572	8200357			29MT	24	MOD 3.00	10	SAE 1
MITSUBISHI	M009T62572ZA	8200357			29MT	24	MOD 3.00	10	SAE 1
MITSUBISHI	M009T70077			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70279	8200291			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T70379			8200434	39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M009T70579			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70776			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70777			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70779			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70879	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T70975			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70977			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70979			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T70979ZX			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71075	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	M009T71076	8200468			39MT	12	8/10	11	SAE 1

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MITSUBISHI	M009T71078	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	M009T71179	8200287			39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M009T71378			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T71379	8200005		8200433	38MT	12	8/10	12	SAE 3
MITSUBISHI	M009T71379ZX			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T71478			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71479			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71479ZX			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71579			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T71679	8200076			38MT	12	8/10	10	SAE 1
MITSUBISHI	M009T71779	8200077			38MT	12	8/10	10	SAE 1
MITSUBISHI	M009T71779ZX	8200077			38MT	12	8/10	10	SAE 1
MITSUBISHI	M009T71879			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71879ZX			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T71978	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T71979	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72078	8201100			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72079	8201100			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72079ZX	8201100			39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72178			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72578	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M009T72578ZX	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M009T72579			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M009T72679	8200005		8200433	38MT	12	8/10	12	SAE 3
MITSUBISHI	M009T72679ZX			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T73179			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M009T80471	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T80472	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T80473	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T82378			8200330	39MT	24	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MITSUBISHI	M009T82479			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M009T83379	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T83579			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M009T83579ZX			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M009T83671	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T84379	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T84479			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M009T84579			8200435	39MT	24	8/10	12	SAE 3
MITSUBISHI	M009T84771	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009T85679	8200436			39MT	24	MOD 3.00	12	SAE 3
MITSUBISHI	M009TA0079	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M009TA0079ZX	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M101R	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105302			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105311	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105352	8200468			39MT	12	8/10	11	SAE 1
LEECE NEVILLE	M105602			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105603	8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105610	8200077			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105611	8200076			38MT	12	8/10	10	SAE 1
PRESTOLITE	M105611	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105612	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
LEECE NEVILLE	M105613			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105615	8200288		8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M105617	8200007			38MT	12	8/10	10	SAE 3
LEECE NEVILLE	M105702			8200330	39MT	24	6/8	11	SAE 3
LEECE NEVILLE	M105703			8200435	39MT	24	8/10	12	SAE 3
LEECE NEVILLE	M105705			8200435	39MT	24	8/10	12	SAE 3
LEECE NEVILLE	M105710	8200078			38MT	24	8/10	10	SAE 1
LEECE NEVILLE	M105723			8200435	39MT	24	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LEECE NEVILLE	M105724	8200436			39MT	24	MOD 3.00	12	SAE 3
LEECE NEVILLE	M105732			8200330	39MT	24	6/8	11	SAE 3
LEECE NEVILLE	M105R2002SE			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105R2011SE	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105R2012SE	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
LEECE NEVILLE	M105R2022SE	19026028			38MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105R2052SE	8200468			39MT	12	8/10	11	SAE 1
LEECE NEVILLE	M105R2502SE			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105R2503SE	19011407/8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105R2511SE	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	M105R2512SE	8200055			41MT	12	8/10	12	SAE 1
LEECE NEVILLE	M105R2513SE			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M105R2515SE			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M105R2517SE				37MT	12	8/10	10	SAE 3
LEECE NEVILLE	M105R3065SE	8201140			39MT	24	8/10	12	SAE 1
LEECE NEVILLE	M105R3502SE			8200330	39MT	24	6/8	11	SAE 3
LEECE NEVILLE	M105R3523SE			8200435	39MT	24	8/10	12	SAE 3
LEECE NEVILLE	M105R3524SE	8200436			39MT	24	MOD 3.00	12	SAE 3
LEECE NEVILLE	M105R3532SE			8200330	39MT	24	6/8	11	SAE 3
LEECE NEVILLE	M105R3541SE			8200435	39MT	24	8/10	12	SAE 3
LEECE NEVILLE	M110601	8200287			39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M110601PRS			8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M110602	8201100			39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M110603			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M110603PRS			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M110604	8200287			39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M110605	8201100			39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M110606			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M110608	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
LEECE NEVILLE	M110610			8200433	39MT	12	8/10	12	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
LEECE NEVILLE	M110615			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M110R2601SE			8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M110R2602SE	8201100			39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M110R2603SE			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M110R2603SE2D			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M110R2604SE			8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M110R2605SE	8201100			39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M110R2608SE	8201084/8200977			38MT	12	Mod 3.0	12	SAE 3
LEECE NEVILLE	M110R2615SE			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M125600	8200287		8200434	39MT	12	MOD 3.00	12	SAE 3
LEECE NEVILLE	M125601			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M125632	8200289/8200290		8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M125R2001SEP			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M125R2001SEPN			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	M125R2632SE			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	M125R2634SE	8201100			39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M130D2001H			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	M130D2004H	19026028			38MT	12	8/10	12	SAE 3
LEECE NEVILLE	M39330			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M3T33481	93598			REFRIGERATION/ AUX	12	0	9	0
MITSUBISHI	M3T70681	93600			REFRIGERATION/ AUX	12	0	9	0
LEECE NEVILLE	M429130			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M8T71871	93607			REFRIGERATION/ AUX	12	0	9	0
MITSUBISHI	M970979	8200290			39MT	12	6/8	11	SAE 3
MITSUBISHI	M983579			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M983579X			8200330	39MT	24	6/8	11	SAE 3
MITSUBISHI	M9T70077	8200288			39MT	12	6/8	11	SAE 3
MITSUBISHI	M9T70189			8200434	39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	M9T70379			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	M9T70579			8200308	39MT	12	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
mitsubishi	M9T70777			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	M9T70975			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	M9T70979			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	M9T71075	8200468			39MT	12	8/10	11	SAE 1
mitsubishi	M9T71078	8200468			39MT	12	8/10	11	SAE 1
mitsubishi	M9T71179			8200434	39MT	12	MOD 3.00	12	SAE 3
mitsubishi	M9T71378			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	M9T71478			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	M9T71779	8200077			38MT	12	8/10	10	SAE 1
mitsubishi	M9T71978	8200469			39MT	12	8/10	12	SAE 3
mitsubishi	M9T72078	8201100			39MT	12	8/10	12	SAE 3
mitsubishi	M9T72079	8201100			39MT	12	8/10	12	SAE 3
mitsubishi	M9T72178			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	M9T72578	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	M9T73179			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	M9T80471	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T80472	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T80473	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T82378			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	M9T82479			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	M9T83379	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T83579			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	M9T83671	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T84379	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T84771	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	M9T85679	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	MC2378			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	MC4479			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	MC4579			8200435	39MT	24	8/10	12	SAE 3
mitsubishi	MC85679	8200436			39MT	24	MOD 3.00	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MITSUBISHI	MELMK2078	8201100			39MT	12	8/10	12	SAE 3
MITSUBISHI	MELVV0279	8200291			39MT	12	8/10	12	SAE 3
MITSUBISHI	MELVV0776			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MELVV0879	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	MELVV0977			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MELVV1076	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	MELVV1979	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	MIB70579FL	8200289			39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB70975	8200289			39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970059	8200289			39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970379	8200287			39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	MIB970579			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970579FL			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB97059	8200289			39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970777			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970777FL			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970975			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB970975FL			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIB971179	8200287			39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	MIB971179FL	8200287			39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	MIB9T73778			8200971	39MT	12	6/8	11	SAE 1
MITSUBISHI	MIB9TA0579	61008898			39MT	12	8/10	11	SAE 3
MITSUBISHI	MIBFL0579			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIBFL0579FL			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIBFL0777			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIBFL0777FL			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MIBFL1179	8200287			39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	MIBIN3179			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	MIT3179			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	MITFL1179	8200287			39MT	12	MOD 3.00	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MITSUBISHI	MITIN1378			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	MITIN2178			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	MITIN3179			8200433	39MT	12	8/10	12	SAE 3
MITSUBISHI	MITVV0977			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MK0077			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MK1075	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	mk1078	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	MK1978	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	MK2078	8201100			39MT	12	8/10	12	SAE 3
MITSUBISHI	MK2878	8200793		8200971	39MT	12	6/8	11	0
MITSUBISHI	MK4298			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	MKA1075	8200468			39MT	12	8/10	11	SAE 1
MITSUBISHI	MKA1978	8200469			39MT	12	8/10	12	SAE 3
MITSUBISHI	MKA2078	8201100			39MT	12	8/10	12	SAE 3
Model Number	MODEL 1113277	8200064			29MT	24	10/12	10	SAE 1
LEECE NEVILLE	MS2/M130			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-452			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-456			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-500			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-500ND			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-501			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-501ND			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-502			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-502D			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-503			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2504			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-504			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-504D			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-507			8200308	39MT	12	6/8	11	SAE 3
PRESTOLITE	MS2-510			8200308	39MT	12	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
PRESTOLITE	MS2-514	8200289/8200290			39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2-514S			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	MS2520	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	MS2-521	8201002/8200055			38MT/41MT	12	8/10	12	SAE 1
PRESTOLITE	MS2-570	8200005			38MT	12	8/10	12	SAE 3
PRESTOLITE	MS2-570D	8200005			38MT	12	8/10	12	SAE 3
PRESTOLITE	MS2-571	10478812			41MT	12	8/10	12	SAE 3
LEECE NEVILLE	MS-53011-2L			8200435	39MT	24	8/10	12	SAE 3
CROSS REFERENCE	N250800	10478998			42MT	24	6/8	11	SAE 3
CROSS REFERENCE	N250816	1993796			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	N260807	1990413			42MT	24	8/10	12	SAE 3
CROSS REFERENCE	N34945	10479363			41MT	24	8/10	12	SAE 3
DENSO	ND4280005120	8200077			38MT	12	8/10	10	SAE 1
CROSS REFERENCE	NG0104001	10479130			42MT	24	6/8	11	SAE 3
DENSO	NPD2280001953	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	NPD2280001953 GAFP112223	19011400/19011402			29MT	12	10/12	10	SAE 1
DENSO	NPD4280001212			8200308	39MT	12	6/8	11	SAE 3
DENSO	NPD4280001600	19011400			29MT	12	10/12	10	SAE 1
DENSO	NPD4280005120	8200077			38MT	12	8/10	10	SAE 1
DENSO	NPD4280005230	61006210			31MT	12	8/10	10	SAE 1
DENSO	NPD428000-5310	8200077			38MT	12	8/10	10	SAE 1
DENSO	NPD4280008690			8200434	39MT	12	MOD 3.00	12	SAE 3
MITSUBISHI	PB0779			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	PB0979	8200290			39MT	12	6/8	11	SAE 3
CROSS REFERENCE	PB8726	10479343			50MT	24	6/8	11	SAE 3
MITSUBISHI	PC0779			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	PC0979			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	PC1379	8200005		8200433	38MT	12	8/10	12	SAE 3
MITSUBISHI	PC1479			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	PC1779	8200077			38MT	12	8/10	10	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
mitsubishi	PC1879			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	PC2578	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	PC25781	8201084/8200977			38MT	12	MOD 3.00	12	SAE 3
mitsubishi	PC2679	8200005		8200433	38MT	12	8/10	12	SAE 3
mitsubishi	PC72679			8200433	39MT	12	8/10	12	SAE 3
mitsubishi	PC83579			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	PCA1479			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	PV2479			8200330	39MT	24	6/8	11	SAE 3
mitsubishi	PV4379	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	PV83379	8200436			39MT	24	MOD 3.00	12	SAE 3
mitsubishi	PV84379	8200436			39MT	24	MOD 3.00	12	SAE 3
CROSS REFERENCE	QT0646629000	19011403			29MT	12	MOD 3.00	9	SAE 1
CROSS REFERENCE	RE527348	10479339			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	RE52955		10461416		37MT	12	8/10	10	SAE 1
TRP	RE91014759N			8200308	39MT	12	6/8	11	SAE 3
TRP	REN3908			8200308	39MT	12	6/8	11	SAE 3
TRP	REN3933			8200433	39MT	12	8/10	12	SAE 3
TRP	REN3934			8200434	39MT	12	MOD 3.00	12	SAE 3
MHC ROADFORCE	RF10461053	1990490			42MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF20918584	1990483			42MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF2919074	8200289			39MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF299136698	10478999			41MT	12	8/10	12	SAE 3
MHC ROADFORCE	RF36919524			8200308	39MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF4091367	8200287			39MT	12	MOD 3.00	12	SAE 3
MHC ROADFORCE	RF454009857	1990483			42MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF61918993	8200290			39MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF719118336	8200289			39MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF74913642	8200289			39MT	12	6/8	11	SAE 3
MHC ROADFORCE	RF779137078			8200433	39MT	12	8/10	12	SAE 3
MHC ROADFORCE	RF8200308			8200308	39MT	12	6/8	11	SAE 3

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
MHC ROADFORCE	RF8200433			8200433	39MT	12	8/10	12	SAE 3
MHC ROADFORCE	RF919164555	8200289			39MT	12	6/8	11	SAE 3
DIXIE	S-1107			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-1131			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-1232			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-1265			8200308	39MT	12	6/8	11	SAE 3
HITACHI	S13-207A	93591			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-207C	93591			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-211	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-289	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-289A	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-289B	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-289C	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-407	93592			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-407A	93592			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-89	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-89A	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-89B	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-89C	93584			REFRIGERATION/ AUX	12	0	9	0
HITACHI	S13-89D	93584			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-7018	8200972			29MT	12	8/10	10	SAE 1
DIXIE	S-80051	93589			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-80052	93591			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-80079		61007509		MISC	12	0	11	0
DIXIE	S-80086		61007505		MISC	12	0	11	0
DIXIE	S-80135			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-80158	93584			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-80166		61010421		MISC	12	0	13	0
DIXIE	S-80168		61007513		MISC	12	0	11	0
DIXIE	S-80229		61007503		MISC	12	0	10	0

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DIXIE	S-80245			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-80246			8200330	39MT	24	6/8	11	SAE 3
DIXIE	S-80273		61007510		MISC	12	0	11	0
DIXIE	S-80274		61007508		MISC	12	0	11	0
DIXIE	S-80290	93592			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-80483	93607			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8089	93550			REFRIGERATION/ AUX	12	0	15	0
DIXIE	S-8124	93553			REFRIGERATION/ AUX	12	0	15	0
DIXIE	S-8213		10465054		28MT	12	10/12	10	PAD
DIXIE	S-8252		61007511		MISC	12	0	11	0
DIXIE	S-8254		61010421		MISC	12	0	13	0
DIXIE	S-8261	93549			REFRIGERATION/ AUX	12	0	11	0
DIXIE	S-8308			8200308	39MT	12	6/8	11	SAE 3
DIXIE	S-8315	93584			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8675	93588			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8788	93553			REFRIGERATION/ AUX	12	0	15	0
DIXIE	S-8790	93594			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8791	93594			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8807	93553			REFRIGERATION/ AUX	12	0	15	0
DIXIE	S-8889	93590			REFRIGERATION/ AUX	12	0	9	0
DIXIE	S-8911		61007504		MISC	12	0	10	0
FLEETPRIDE PRIMAPOWER	S9-039-1101			8200308	39MT	12	6/8	11	SAE 3
FLEETPRIDE PRIMAPOWER	S9-039-1201			8200433	39MT	12	8/10	12	SAE 3
CROSS REFERENCE	SA1007RM		10461431		41MT	12	8/10	12	SAE 1
LEECE NEVILLE	SA-1025	19011407/8200972			29MT	12	8/10	10	SAE 1
CROSS REFERENCE	SA-922	19011409			29MT	12	10/12	10	SAE 1
CROSS REFERENCE	SA-971	8200235			38MT	12	8/10	10	SAE 1
BOSCH	SR9920LH			8200308	39MT	12	6/8	11	SAE 3
BOSCH	SR9921			8200433	39MT	12	8/10	12	SAE 3
BOSCH	SR9921LH			8200433	39MT	12	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
BOSCH	SR9922LH			8200434	39MT	12	MOD 3.00	12	SAE 3
BOSCH	SR9947X	93594			REFRIGERATION/AUX	12	0	9	0
BOSCH	SR9949X	93549			REFRIGERATION/AUX	12	0	11	0
BOSCH	SR9973X		10465043		28MT	12	10/12	10	SAE 1
UNIPOINT	STR-0123	8200075			38MT	12	MOD 3.00	11	SAE 1
UNIPOINT	STR-3571	93598			REFRIGERATION/AUX	12	0	9	0
UNIPOINT	STR4208	1990489		8200308	42MT	12	6/8	11	SAE 3
UNIPOINT	STR-4292			8200308	39MT	12	6/8	11	SAE 3
UNIPOINT	STR-4295			8200433	39MT	12	8/10	12	SAE 3
UNIPOINT	STR-4390			8200330	39MT	24	6/8	11	SAE 3
UNIPOINT	STR-4391			8200435	39MT	24	8/10	12	SAE 3
UNIPOINT	STR-4392			8200330	39MT	24	6/8	11	SAE 3
UNIPOINT	STR-4394	8200436			39MT	24	MOD 3.00	12	SAE 3
UNIPOINT	STR-6006	93584			REFRIGERATION/AUX	12	0	9	0
UNIPOINT	STR-6007	93592			REFRIGERATION/AUX	12	0	9	0
UNIPOINT	STR6090		61010421		MISC	12	0	13	0
UNIPOINT	STR7051	19011400			29MT	12	10/12	10	SAE 1
UNIPOINT	STR-7054	8200400			29MT	12	8/10	10	SAE 1
UNIPOINT	STR7075		10465150		28MT	12	10/12	10	SAE 1
UNIPOINT	STR-8057	93549			REFRIGERATION/AUX	12	0	11	0
UNIPOINT	STR-8112	93550			REFRIGERATION/AUX	12	0	15	0
UNIPOINT	STR-9051	8200005			38MT	12	8/10	12	SAE 3
DENSO	SUM4280001211			8200308	39MT	12	6/8	11	SAE 3
DENSO	TG228000-5311	8200005			38MT	12	8/10	12	SAE 3
DENSO	TG2280005851	8200076			38MT	12	8/10	10	SAE 1
DENSO	TG228000-7371	8200007			38MT	12	8/10	10	SAE 3
DENSO	TG4280001881	8200103			29MT	12	MOD 3.00	9	SAE 1
DENSO	TG4280002690	8200005			38MT	12	8/10	12	SAE 3
DENSO	TG428000-4420			8200308	39MT	12	6/8	11	SAE 3
DENSO	TG428000-4430	19011402/19011400		8200308	29MT	12	10/12	10	SAE 1

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DENSO	TG428000-4440			8200308	39MT	12	6/8	11	SAE 3
DENSO	TG4280005190			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	TIN1378			8200433	39MT	12	8/10	12	SAE 3
DIXIE	TS-1061		10461739		50MT	24	6/8	11	SAE 3
DIXIE	TS-1298	10478828/10478827			50MT	32	6/8	11	SAE 3
DIXIE	TS-1502	1993796/1990453/ 1990413/1990366			42MT	24	8/10	12	SAE 3
DIXIE	TS-1503	10478998/1990418			42MT	24	6/8	11	SAE 3
DIXIE	TS-1534		10461416/ 10461225		37MT	12	8/10	10	SAE 1
DIXIE	TS-1541		10461089		37MT	12	8/10	12	SAE 3
DIXIE	TS-1551		10461058		37MT	12	8/10	10	SAE 3
DIXIE	TS-1562		10461277		37MT	12	8/10	12	SAE 3
DIXIE	TS-1570	1990447			42MT	24	6/8	11	SAE 3
DIXIE	TS-1576	1113274			28MT	12	8/10	10	SAE 1
DIXIE	TS-1578		10465043		28MT	12	10/12	10	SAE 1
DIXIE	TS-1582		10465239		28MT	12	8/10	10	0
DIXIE	TS-1603	1990490			42MT	12	6/8	11	SAE 3
DIXIE	TS-1604	1990489			42MT	12	6/8	11	SAE 3
DIXIE	TS-1606		10461169		37MT	12	8/10	12	SAE 3
DIXIE	TS-1607		10461098		37MT	12	8/10	10	SAE 1
DIXIE	TS-1608		10461110		37MT	12	8/10	10	SAE 1
DIXIE	TS-1611	1990406			42MT	12	8/10	12	SAE 3
DIXIE	TS-1612	10479130/1993788			42MT	24	6/8	11	SAE 3
DIXIE	TS-1615	10478829	10461160		50MT	64	6/8	11	SAE 3
DIXIE	TS-1616	10478830			50MT	64	6/8	11	SAE 3
DIXIE	TS-1626		10465150		28MT	12	10/12	10	SAE 1
DIXIE	TS-1635		10461170		37MT	12	8/10	10	SAE 3
DIXIE	TS-1652	10478999	10461171		41MT	12	8/10	12	SAE 3
DIXIE	TS-1668	10478812			41MT	12	8/10	12	SAE 3
DIXIE	TS-1675		10461207		37MT	12	8/10	10	SAE 1
DIXIE	TS-1681		10461282		41MT	12	8/10	12	SAE 1

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
DIXIE	TS-1682		10461431		41MT	12	8/10	12	SAE 1
DIXIE	TS-1689	10479010			42MT	24	6/8	11	SAE 3
DIXIE	TS-1711	10479013			41MT	24	8/10	12	SAE 1
DIXIE	TS-1713		10461298		37MT	12	8/10	10	SAE 1
DIXIE	TS-1734		10461496		41MT	12	8/10	12	SAE 1
DIXIE	TS-1736	10479228			42MT	24	8/10	12	SAE 3
DIXIE	TS-1743	19011530			39MT	12	6/8	11	SAE 3
DIXIE	TS-1754	8200077	8300024		38MT	12	8/10	10	SAE 1
DIXIE	TS-1755	19026028			38MT	12	8/10	12	SAE 3
DIXIE	TS-1756	8200078			38MT	24	8/10	10	SAE 1
DIXIE	TS-1758		10461768		38MT	12	8/10	10	SAE 1
DIXIE	TS-1765	19011400	10461770		29MT	12	10/12	10	SAE 1
DIXIE	TS-1766	19011402			29MT	12	10/12	10	SAE 1
DIXIE	TS-1767	19011403	10461772		29MT	12	MOD 3.00	9	SAE 1
DIXIE	TS-1768	19011407			29MT	12	8/10	10	SAE 1
DIXIE	TS-1769	19011409	10461765		29MT	12	10/12	10	SAE 1
DIXIE	TS-1770		10461481		28MT	12	10/12	10	SAE 1
DIXIE	TS-1771		10461454		28MT	12	MOD 3.00	9	SAE 1
DIXIE	TS-1776	10479343/8200016	10461744		50MT	24	6/8	11	SAE 3
DIXIE	TS-1778	19026035/8200075	8300026		38MT	12	MOD 3.00	11	SAE 1
DIXIE	TS-1779	8200007			38MT	12	8/10	10	SAE 3
DIXIE	TS-1806			8200308	39MT	12	6/8	11	SAE 3
DIXIE	TS-1817	8201100			39MT	12	8/10	12	SAE 3
DIXIE	TS-1824			8200308	39MT	12	6/8	11	SAE 3
DIXIE	TS-1825			8200433	39MT	12	8/10	12	SAE 3
DIXIE	TS-1840			8200330	39MT	24	6/8	11	SAE 3
CROSS REFERENCE	V60511	1990483			42MT	12	6/8	11	SAE 3
MITSUBISHI	VV0279	8200291			39MT	12	8/10	12	SAE 3
MITSUBISHI	VV0776			8200308	39MT	12	6/8	11	SAE 3
MITSUBISHI	VV0879	8200469			39MT	12	8/10	12	SAE 3

Starter

Starter Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement			Family	Volts	Pinion Pitch	Pinion Teeth	Mounting
		All makes	Reman	Rot Flange					
mitsubishi	VV0977			8200308	39MT	12	6/8	11	SAE 3
mitsubishi	VV1979	8200469			39MT	12	8/10	12	SAE 3
CROSS REFERENCE	W0007769	19011407			29MT	12	8/10	10	SAE 1
CROSS REFERENCE	X00007196	10479339			50MT	24	6/8	11	SAE 3
CROSS REFERENCE	X59417200001	10478828			50MT	32	6/8	11	SAE 3
LEECE NEVILLE	ZLNM105602			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	ZLNM105603	19011407/8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	ZLNM105611	8200076			38MT	12	8/10	10	SAE 1
LEECE NEVILLE	ZLNM105613			8200433	39MT	12	8/10	12	SAE 3
LEECE NEVILLE	ZLNM105R2503SE	19011407/8200972			29MT	12	8/10	10	SAE 1
LEECE NEVILLE	ZLNM110R2603SE			8200308	39MT	12	6/8	11	SAE 3
LEECE NEVILLE	ZLNM125601			8200308	39MT	12	6/8	11	SAE 3

Starter

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CARGO (EUROPE)	110801	1117647/1117645	1117655	20SI	24	35/45	J180 Hinge
CARGO (EUROPE)	111232	1117965		21SI	12	130	J180 Hinge
CARRIER TRANSICOLD	30-00363	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00423	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-50307	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	20-4133-72	93102		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	20-41-5456	93082		REFRIGERATION/AUX	12	120	
CARRIER TRANSICOLD	20-41-5457	93070		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	20-41-5458	61013382		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	20-41-6780	61013382		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	20-41-6990	93095/93094		REFRIGERATION/AUX	12	65/120	
CARRIER TRANSICOLD	20-44-9571	61013382		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	20-44-9572	93070		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	20-45-2254	61013382		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	20-45-2258	93082		REFRIGERATION/AUX	12	120	
CARRIER TRANSICOLD	29-50340-00	61013382		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	30-00171-00	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00171-11	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00349-01	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00351-00	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00351-02	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00351-04	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00363-00	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00363-01	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00363-03	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00363-04	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-00	93091		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	30-00409-02	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-03	93091		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	30-00409-04	93074		REFRIGERATION/AUX	12	65	

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
CARRIER TRANSICOLD	30-00409-06	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-07	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-08	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-09	93091		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	30-00409-10	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-11	93091		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	30-00409-12	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-13	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-16	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-17	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-18	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-19	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-60	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-62	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-63	93091		REFRIGERATION/AUX	12	105	
CARRIER TRANSICOLD	30-00409-64	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-65	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00423-00	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-01114-03	93105		REFRIGERATION/AUX	12	70	
CARRIER TRANSICOLD	30-01114-05	93105		REFRIGERATION/AUX	12	70	
CARRIER TRANSICOLD	30-01114-06	93105		REFRIGERATION/AUX	12	70	
CARRIER TRANSICOLD	30-01114-07	93076		REFRIGERATION/AUX	12	70	
CARRIER TRANSICOLD	30-50307-00	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-50337-00	93087		REFRIGERATION/AUX	12	37	
CARRIER TRANSICOLD	30-50341-00	93087/93088		REFRIGERATION/AUX	12	37/65	
CARRIER TRANSICOLD	30-50342-00	93088		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-50345-00	93081		REFRIGERATION/AUX	12	23	
CARRIER TRANSICOLD	30-50409-65	93090		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-60050-03	93076		REFRIGERATION/AUX	12	70	
CARRIER TRANSICOLD	30-60050-04	93076		REFRIGERATION/AUX	12	70	

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CARRIER TRANSICOLD	140954	93073		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-07RM	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-64RM	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	30-00409-65RM	93074		REFRIGERATION/AUX	12	65	
CARRIER TRANSICOLD	96-101-21K	93097		REFRIGERATION/AUX	12	60	
CARRIER TRANSICOLD	96-111-02K	93096		REFRIGERATION/AUX	12	40	
CASE NEW HOLLAND	87372640	8600110		36SI	24	95	Quad
CATERPILLAR	0R2698		10459319	20SI	24	45	J180 Hinge
CHRYSLER	04801250AC	8600763		18SI	12	175	Special
CHRYSLER	4801250AC	8600763		18SI	12	175	Special
CHRYSLER	5103885AA	8600658		18SI	12	175	Special
CHRYSLER	5103886AA	8600658		18SI	12	175	Special
CHRYSLER	5103887AA	8600658		18SI	12	175	Special
CHRYSLER	5134199AA	8600658		18SI	12	175	Special
CHRYSLER	5134204AA	8600658		18SI	12	175	Special
CHRYSLER	5134205AA	8600658		18SI	12	175	Special
CUMMINS	204559	1117647		20SI	24	35	J180 Hinge
CUMMINS	216038	8600308		28SI	12	160	J180 Long Hinge
CUMMINS	216039	8600308		28SI	12	160	J180 Long Hinge
CUMMINS	3000346	1117733		30SI	32	60	J180 Hinge
CUMMINS	3016627RX	1117647	1117655	20SI	24	35	J180 Hinge
CUMMINS	3016628	1117641		20SI	12	60	J180 Hinge
CUMMINS	3016628RX	1117641	10459020	20SI	12	60	J180 Hinge
CUMMINS	3056492	1117805		30SI	24	75	J180 Hinge
CUMMINS	3062333RX		10459008	30SI	12	105	J180 Hinge
CUMMINS	3072483	1117817		30SI	24	100	J180 Hinge
CUMMINS	3078115	19010001		26SI	24	50	J180 Hinge
CUMMINS	3332213		10459196	33SI	24	100	J180 Hinge
CUMMINS	3400582	8600064		35SI	12	140	J180 Hinge
CUMMINS	3400698	19011153	10459196	33SI	24	100	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUMMINS	3603668RX	8600310		24SI	12	160	J180 Hinge
CUMMINS	3603848RX	19010001	10459064	26SI	24	50	J180 Hinge
CUMMINS	3603849RX	19010001	10459064	26SI	24	50	J180 Hinge
CUMMINS	3603850RX		10459077/10459065	26SI	12	75/85	J180 Hinge
CUMMINS	3603851RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3603852RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3603877RX		10459008	30SI	12	105	J180 Hinge
CUMMINS	3604225RX	19010002	10459076	26SI	24	75	J180 Hinge
CUMMINS	3604647RX		10459065	26SI	12	85	J180 Hinge
CUMMINS	3604659RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3604668RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3604676RX	1117619	10459319	20SI	24	50	J180 Hinge
CUMMINS	3604678RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3604679RX	1117733		30SI	32	60	J180 Hinge
CUMMINS	3604685RX		1117746	30SI	24	60	J180 Hinge
CUMMINS	3675103RX	1117805		30SI	24	75	J180 Hinge
CUMMINS	3675104RX		10459120	30SI	24	100	J180 Hinge
CUMMINS	3675108RX		10459064	26SI	24	50	J180 Hinge
CUMMINS	3675109RX		10459065	26SI	12	85	J180 Hinge
CUMMINS	3675126RX	1117647	1117655	20SI	24	35	J180 Hinge
CUMMINS	3675141RX	93073		REFRIGERATION/AUX	12	65	
CUMMINS	3675146RX	93087		REFRIGERATION/AUX	12	37	
CUMMINS	3675158RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3675233	8600064		35SI	12	140	J180 Hinge
CUMMINS	3675233NW	8600064		35SI	12	140	J180 Hinge
CUMMINS	3675233RX	8600064		35SI	12	140	J180 Hinge
CUMMINS	3675235RX		10459196	33SI	24	100	J180 Hinge
CUMMINS	3675240RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3675250RX	19011153		33SI	24	100	J180 Hinge
CUMMINS	3675252RX	19011153		33SI	24	100	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUMMINS	3680140	8600064		35SI	12	140	J180 Hinge
CUMMINS	3920615	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUMMINS	3920616	19020310		22SI	12	150	J180 Hinge
CUMMINS	3935528RX	19020310		22SI	12	150	J180 Hinge
CUMMINS	3935529	19020310		22SI	12	150	J180 Hinge
CUMMINS	3939014	1117619		20SI	24	50	J180 Hinge
CUMMINS	3972732	8600032		24SI	12	100	J180 Hinge
CUMMINS	3972733	19020903		24SI	12	130	J180 Hinge
CUMMINS	3972733RX	19020903		24SI	12	130	J180 Hinge
CUMMINS	3972735	8600017		24SI	24	70	J180 Hinge
CUMMINS	4078701	8600398		36SI	24	105	J180 Hinge
CUMMINS	4933133	19020208		11SI	12	95	Spool
CUMMINS	5293586	8600030		11SI	12	95	Spool
CUMMINS	5482741	8600142		24SI	12	160	J180 Hinge
CUMMINS	5482743	8600143		24SI	12	160	Pad
CUSTOMER PART NUMBER	8600078 746	8600078		28SI	12	180	Pad
CUSTOMER PART NUMBER	2132-1117619	1117619		20SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	2132-1117641	1117641		20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	2132-1117645	1117645		20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	2132-1117647	1117647		20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	2132-1117733	1117733		30SI	32	60	J180 Hinge
CUSTOMER PART NUMBER	2132-1117746		1117746	30SI	24	60	J180 Hinge
CUSTOMER PART NUMBER	2132-1117805	1117805		30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	2132-1117817	1117817		30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	2132-1117821	1117821		30SI	24	80	J180 Hinge
CUSTOMER PART NUMBER	2132-1117915	1117915		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	2132-1117965	1117965		21SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	2132-8400223	8400223		11SI	12	95	Spool
CUSTOMER PART NUMBER	2132-8400251	8400251		DR44G	12	145	
CUSTOMER PART NUMBER	2132-8600002	8600002		11SI	12	95	Spool

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	2132-8600016	8600016		24SI	24	70	Pad
CUSTOMER PART NUMBER	2132-8600017	8600017		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	2132-8600032	8600032		24SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	2132-8600043	8600043		24SI	12	160	Pad
CUSTOMER PART NUMBER	2132-8600064	8600064		35SI	12	140	J180 Hinge
CUSTOMER PART NUMBER	2132-8600065	8600065		35SI	12	140	Quad
CUSTOMER PART NUMBER	2132-8600066	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	2132-8600094	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	2132-8600096	8600096		24SI	12	100	Pad
CUSTOMER PART NUMBER	2132-8600125	8600125		36SI	12	170	Quad
CUSTOMER PART NUMBER	2132-8600126	8600126		36SI	12	170	J180 Hinge
CUSTOMER PART NUMBER	2132-8600127	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	2132-8600142	8600142		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	2132-8600143	8600143		24SI	12	160	Pad
CUSTOMER PART NUMBER	2132-8600201	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	2132-8600223	8600223		28SI	12	180	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600246	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	2132-8600279	8600279		40SI	12	275	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600280	8600280		40SI	12	275	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600298	8600298		40SI	12	300	Pad
CUSTOMER PART NUMBER	2132-8600299	8600299		40SI	12	300	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600300	8600300		40SI	12	300	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600307	8600307		28SI	12	200	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600308	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600311	8600311		28SI	12	180	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600312	8600312		28SI	12	160	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600313	8600313		28SI	12	200	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600314	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	2132-8600315	8600315		28SI	12	160	Pad
CUSTOMER PART NUMBER	2132-8600316	8600316		28SI	12	180	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	2132-8600338	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	2132-8600339	8600339		40SI	12	240	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600369	8600369		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	2132-8600388	8600388		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	2132-8600390	8600390		40SI	12	240	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600402	8600402		24SI	12	100	Pad
CUSTOMER PART NUMBER	2132-8600467	8600467		28SI	24	110	J180 Short Hinge
CUSTOMER PART NUMBER	2132-8600468	8600468		28SI	24	110	J180 Long Hinge
CUSTOMER PART NUMBER	2132-8600889	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	2132-10459008		10459008	30SI	12	105	J180 Hinge
CUSTOMER PART NUMBER	2132-10459020		10459020	20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	2132-10459036	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	2132-10459057		10459057	30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	2132-10459064		10459064	26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	2132-10459065		10459065	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	2132-10459066		10459066	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	2132-10459076		10459076	26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	2132-10459077		10459077	26SI	12	75	J180 Hinge
CUSTOMER PART NUMBER	2132-10459120		10459120	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	2132-10459196		10459196	33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	2132-10459199		10459199	34SI	24	100	Quad
CUSTOMER PART NUMBER	2132-10459319		10459319	20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	2132-19010000	19010000		26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	2132-19010001	19010001		26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	2132-19010002	19010002		26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	2132-19010108	19010108		21SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	2132-19010111	19010111		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	2132-19010166	19010166		21SI	12	115	J180 Hinge
CUSTOMER PART NUMBER	2132-19010182	19010182		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	2132-19010200	19010200		21SI	24	70	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	2132-19011153	19011153		33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	2132-19020208	19020208		11SI	12	95	Spool
CUSTOMER PART NUMBER	2132-19020302	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	2132-19020303	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	2132-19020310	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	2132-19020312	19020312		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	2132-19020396	19020396		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	2132-19020606	19020606		7SI	12	70	Spool
CUSTOMER PART NUMBER	2132-19020608	19020608		7SI	12	70	Spool
CUSTOMER PART NUMBER	2132-19020609	19020609		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	2132-19020612	19020612		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	2132-19020616	19020616		7SI	12	70	Spool
CUSTOMER PART NUMBER	2132-19020617	19020617		7SI	12	70	Spool
CUSTOMER PART NUMBER	2132-19020889	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	2132-19020900	19020900		24SI	12	145	Pad
CUSTOMER PART NUMBER	2132-19020901	19020901		24SI	12	145	J180 Hinge
CUSTOMER PART NUMBER	2132-19020903	19020903		24SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	2132-86000126	8600126		36SI	12	170	J180 Hinge
CUSTOMER PART NUMBER	0499-GG1	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	08400251	8400251		DR44G	12	145	
CUSTOMER PART NUMBER	10010644	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	104590008RX		10459008	30SI	12	105	J180 Hinge
CUSTOMER PART NUMBER	10459020RMAN		10459020	20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	10459057RMAN		10459057	30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	10459064RMAN		10459064	26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	10459066RMAN		10459066	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	10459076RMAN		10459076	26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	10459077RMAN		10459077	26SI	12	75	J180 Hinge
CUSTOMER PART NUMBER	10459120RMAN		10459120	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	10459196RMAN		10459196	33SI	24	100	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	10459199RMAN		10459199	34SI	24	100	Quad
CUSTOMER PART NUMBER	10459319RMAN		10459319	20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	10459590RMN		10459590	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	110954522	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	1117655RMAN		1117655	20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	1117746RMAN		1117746	30SI	24	60	J180 Hinge
CUSTOMER PART NUMBER	1882115C92	8600497		36SI	24	105	Pad
CUSTOMER PART NUMBER	19020310P	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	21328600247	8600247/8600066		35SI	12	135/140	Pad
CUSTOMER PART NUMBER	21328600310	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	21328600404	8600404		24SI	12	145	Pad
CUSTOMER PART NUMBER	2132-X1117655		1117655	20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	21592037	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	25186275	8600032		24SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	3585205C91	8600707/8600314		28SI/38SI	12	200/215	Pad
CUSTOMER PART NUMBER	3604666RX	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	3604667RX	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	3675222RX	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	3675228RX	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	3675229RX	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	3688268	8600559		36SI	24	105	Pad
CUSTOMER PART NUMBER	4805JB	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	4863JBH-AUT	8600307		28SI	12	200	J180 Long Hinge
CUSTOMER PART NUMBER	5034-2824LC	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	8600066P	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	8600127P	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	8600298P	8600298		40SI	12	300	Pad
CUSTOMER PART NUMBER	8600308P	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	8600658P	8600658		18SI	12	175	Special
CUSTOMER PART NUMBER	8600664	8600668		40SI	24	160	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	8600668P	8600668		40SI	24	160	Pad
CUSTOMER PART NUMBER	ABP/N15-555P160	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	ABP/N15-AV143J170	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	ABPN15-BLP160	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	ABPN15444J150	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	ABPN15444P150	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	ABPN1544P150	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	ABPN15555J160	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	ABPN15555P160	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	ABPN1555J160	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	ABPN15AVI2003P240	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	ABPN15BCP185	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	ABPN15BLJ160	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	ABPN15BLJ185	8600311		28SI	12	180	J180 Long Hinge
CUSTOMER PART NUMBER	ABPN15BLP16	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	ABPN15BLP160	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	ABP-N15-BLP185	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	ABPN15BLJ185	8600126		36SI	12	170	J180 Hinge
CUSTOMER PART NUMBER	DE 19020889	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	DE 8600223	8600223		28SI	12	180	J180 Short Hinge
CUSTOMER PART NUMBER	DEC8600311	8600311		28SI	12	180	J180 Long Hinge
CUSTOMER PART NUMBER	DEL8600308	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	DEL8600889	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	DER8600143	8600143		24SI	12	160	Pad
CUSTOMER PART NUMBER	DL 8600314P	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	DR 10459020		10459020	20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	DR 10459051	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	DR 10459057		10459057	30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DR 10459064		10459064	26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DR 10459065		10459065	26SI	12	85	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DR 10459066		10459066	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	DR 10459076		10459076	26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DR 10459077		10459077	26SI	12	75	J180 Hinge
CUSTOMER PART NUMBER	DR 10459120		10459120	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DR 10459196		10459196	33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DR 10459199		10459199	34SI	24	100	Quad
CUSTOMER PART NUMBER	DR 10459319		10459319	20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	DR 10459320	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	DR 1117619	1117619		20SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DR 1117641	1117641		20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	DR 1117645	1117645		20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	DR 1117647	1117647		20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	DR 1117655		1117655	20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	DR 1117733	1117733		30SI	32	60	J180 Hinge
CUSTOMER PART NUMBER	DR 1117746		1117746	30SI	24	60	J180 Hinge
CUSTOMER PART NUMBER	DR 1117805	1117805		30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DR 1117817	1117817		30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DR 1117821	1117821		30SI	24	80	J180 Hinge
CUSTOMER PART NUMBER	DR 1117915	1117915		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 1117965	1117965		21SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	DR 19010000	19010000		26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DR 19010001	19010001		26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DR 19010002	19010002		26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DR 19010108	19010108		21SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DR 19010111	19010111		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 19010166	19010166		21SI	12	115	J180 Hinge
CUSTOMER PART NUMBER	DR 19010168	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	DR 19010182	19010182		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 19010200	19010200		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 19011017	8600064		35SI	12	140	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DR 19011153	19011153		33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DR 19011164	19011164		33SI	12	110	J180 Hinge
CUSTOMER PART NUMBER	DR 19011177	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DR 19011200	8600064		35SI	12	140	J180 Hinge
CUSTOMER PART NUMBER	DR 19011215	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DR 19011216	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DR 19011258	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DR 19020208	19020208		11SI	12	95	Spool
CUSTOMER PART NUMBER	DR 19020300	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	DR 19020303	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DR 19020310	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	DR 19020312	19020312		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DR 19020396	19020396		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DR 19020606	19020606		7SI	12	70	Spool
CUSTOMER PART NUMBER	DR 19020608	19020608		7SI	12	70	Spool
CUSTOMER PART NUMBER	DR 19020609	19020609		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	DR 19020612	19020612		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	DR 19020616	19020616		7SI	12	70	Spool
CUSTOMER PART NUMBER	DR 19020617	19020617		7SI	12	70	Spool
CUSTOMER PART NUMBER	DR 19020801	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	DR 19020802	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
CUSTOMER PART NUMBER	DR 19020804	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	DR 19020889	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	DR 19020900	19020900		24SI	12	145	Pad
CUSTOMER PART NUMBER	DR 19020901	19020901		24SI	12	145	J180 Hinge
CUSTOMER PART NUMBER	DR 19020903	19020903		24SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	DR 8400223	8400223		11SI	12	95	Spool
CUSTOMER PART NUMBER	DR 8400251	8400251		DR44G	12	145	
CUSTOMER PART NUMBER	DR 8600002	8600002		11SI	12	95	Spool
CUSTOMER PART NUMBER	DR 8600015	8600127		36SI	12	170	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DR 8600016	8600016		24SI	24	70	Pad
CUSTOMER PART NUMBER	DR 8600017	8600017		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 8600030	8600030		11SI	12	95	Spool
CUSTOMER PART NUMBER	DR 8600032	8600032		24SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DR 8600060	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	DR 8600065	8600065		35SI	12	140	Quad
CUSTOMER PART NUMBER	DR 8600066	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DR 8600078	8600078		28SI	12	180	Pad
CUSTOMER PART NUMBER	DR 8600094	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	DR 8600094 068	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	DR 8600094 441	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	DR 8600094 746	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	DR 8600096	8600096		24SI	12	100	Pad
CUSTOMER PART NUMBER	DR 8600110	8600110		36SI	24	95	Quad
CUSTOMER PART NUMBER	DR 8600125	8600125		36SI	12	170	Quad
CUSTOMER PART NUMBER	DR 8600126	8600126		36SI	12	170	J180 Hinge
CUSTOMER PART NUMBER	DR 8600127	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	DR 8600142	8600142		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DR 8600143	8600143		24SI	12	160	Pad
CUSTOMER PART NUMBER	DR 8600201 068	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	DR 8600201 441	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	DR 8600201 746	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	DR 8600223	8600223		28SI	12	180	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600232	8600232		36SI	24	105	Pad
CUSTOMER PART NUMBER	DR 8600247	8600247		35SI	12	135	Pad
CUSTOMER PART NUMBER	DR 8600253 441	8600253		28SI	12	200	Pad
CUSTOMER PART NUMBER	DR 8600253 746	8600253		28SI	12	200	Pad
CUSTOMER PART NUMBER	DR 8600279	8600279		40SI	12	275	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600280	8600280		40SI	12	275	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600298	8600298		40SI	12	300	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DR 8600299	8600299		40SI	12	300	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600300	8600300		40SI	12	300	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600307	8600307		28SI	12	200	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600308	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600310	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DR 8600311	8600311		28SI	12	180	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600312	8600312		28SI	12	160	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600313	8600313		28SI	12	200	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600314	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	DR 8600316	8600316		28SI	12	180	Pad
CUSTOMER PART NUMBER	DR 8600333	8600333		33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DR 8600338	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	DR 8600338 068	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	DR 8600338 746	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	DR 8600339	8600339		40SI	12	240	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600369	8600369		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	DR 8600388	8600388		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DR 8600390	8600390		40SI	12	240	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600398	8600398		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	DR 8600400	8600721		36SI	24	60	J180 Hinge
CUSTOMER PART NUMBER	DR 8600404	8600404		24SI	12	145	Pad
CUSTOMER PART NUMBER	DR 8600467	8600467		28SI	24	110	J180 Short Hinge
CUSTOMER PART NUMBER	DR 8600468	8600468		28SI	24	110	J180 Long Hinge
CUSTOMER PART NUMBER	DR 8600469	8600469		28SI	24	110	Pad
CUSTOMER PART NUMBER	DR 8600628	8600628		40SI	12	320	Pad
CUSTOMER PART NUMBER	DR 860064	8600064		35SI	12	140	J180 Hinge
CUSTOMER PART NUMBER	DR 8600664	8600668		40SI	24	160	Pad
CUSTOMER PART NUMBER	DR 8600707	8600707		38SI	12	215	Pad
CUSTOMER PART NUMBER	DR 8600889	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	DR 8700004	8600066		35SI	12	140	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DR 8700067	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	DR 8700080	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	DRA10459008		10459008	30SI	12	105	J180 Hinge
CUSTOMER PART NUMBER	DRA10459020		10459020	20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	DRA10459057		10459057	30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DRA10459064		10459064	26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DRA10459065		10459065	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	DRA10459066		10459066	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	DRA10459076		10459076	26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DRA10459077		10459077	26SI	12	75	J180 Hinge
CUSTOMER PART NUMBER	DRA10459120		10459120	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DRA10459196		10459196	33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DRA10459199		10459199	34SI	24	100	Quad
CUSTOMER PART NUMBER	DRA10459319		10459319	20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	DRA10911185	19011185		34SI	24	100	Pad
CUSTOMER PART NUMBER	DRA1117619	1117619		20SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DRA1117641	1117641		20SI	12	60	J180 Hinge
CUSTOMER PART NUMBER	DRA1117645	1117645		20SI	24	45	J180 Hinge
CUSTOMER PART NUMBER	DRA1117647	1117647		20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	DRA1117655		1117655	20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	DRA1117733	1117733		30SI	32	60	J180 Hinge
CUSTOMER PART NUMBER	DRA1117746		1117746	30SI	24	60	J180 Hinge
CUSTOMER PART NUMBER	DRA1117805	1117805		30SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DRA1117817	1117817		30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DRA1117821	1117821		30SI	24	80	J180 Hinge
CUSTOMER PART NUMBER	DRA1117915	1117915		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA1117965	1117965		21SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	DRA19010000	19010000		26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	DRA19010001	19010001		26SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DRA19010002	19010002		26SI	24	75	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DRA19010108	19010108		21SI	24	50	J180 Hinge
CUSTOMER PART NUMBER	DRA19010111	19010111		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA19010166	19010166		21SI	12	115	J180 Hinge
CUSTOMER PART NUMBER	DRA19010182	19010182		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA19010200	19010200		21SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA19011153	19011153		33SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	DRA19020208	19020208		11SI	12	95	Spool
CUSTOMER PART NUMBER	DRA19020310	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	DRA19020312	19020312		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DRA19020396	19020396		22SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DRA19020606	19020606		7SI	12	70	Spool
CUSTOMER PART NUMBER	DRA19020612	19020612		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	DRA19020614	19020614		7SI	12	70	Spool
CUSTOMER PART NUMBER	DRA19020616	19020616		7SI	12	70	Spool
CUSTOMER PART NUMBER	DRA19020617	19020617		7SI	12	70	Spool
CUSTOMER PART NUMBER	DRA19020889	19020889		22SI	12	150	Pad
CUSTOMER PART NUMBER	DRA19020900	19020900		24SI	12	145	Pad
CUSTOMER PART NUMBER	DRA19020901	19020901		24SI	12	145	J180 Hinge
CUSTOMER PART NUMBER	DRA19020903	19020903		24SI	12	130	J180 Hinge
CUSTOMER PART NUMBER	DRA567619202	19020609		7SI	12	70	J180 Hinge
CUSTOMER PART NUMBER	DRA8600017	8600017		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA8600032	8600032		24SI	12	100	J180 Hinge
CUSTOMER PART NUMBER	DRA8600043	8600043		24SI	12	160	Pad
CUSTOMER PART NUMBER	DRA8600064	8600064		35SI	12	140	J180 Hinge
CUSTOMER PART NUMBER	DRA8600065	8600065		35SI	12	140	Quad
CUSTOMER PART NUMBER	DRA8600066	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DRA8600094	8600094		40SI	12	275	Pad
CUSTOMER PART NUMBER	DRA8600096	8600096		24SI	12	100	Pad
CUSTOMER PART NUMBER	DRA8600125	8600125		36SI	12	170	Quad
CUSTOMER PART NUMBER	DRA8600126	8600126		36SI	12	170	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
CUSTOMER PART NUMBER	DRA8600127	8600127		36SI	12	170	Pad
CUSTOMER PART NUMBER	DRA8600142	8600142		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DRA8600143	8600143		24SI	12	160	Pad
CUSTOMER PART NUMBER	DRA8600201	8600201		28SI	12	160	Pad
CUSTOMER PART NUMBER	DRA8600223	8600223		28SI	12	180	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600232	8600232		36SI	24	105	Pad
CUSTOMER PART NUMBER	DRA8600279	8600279		40SI	12	275	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600280	8600280		40SI	12	275	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600298	8600298		40SI	12	300	Pad
CUSTOMER PART NUMBER	DRA8600299	8600299		40SI	12	300	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600300	8600300		40SI	12	300	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600307	8600307		28SI	12	200	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600308	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600310	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DRA8600311	8600311		28SI	12	180	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600312	8600312		28SI	12	160	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600313	8600313		28SI	12	200	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600314	8600314		28SI	12	200	Pad
CUSTOMER PART NUMBER	DRA8600315	8600315		28SI	12	160	Pad
CUSTOMER PART NUMBER	DRA8600316	8600316		28SI	12	180	Pad
CUSTOMER PART NUMBER	DRA8600338	8600338		40SI	12	240	Pad
CUSTOMER PART NUMBER	DRA8600339	8600339		40SI	12	240	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600369	8600369		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	DRA8600388	8600388		24SI	24	70	J180 Hinge
CUSTOMER PART NUMBER	DRA8600390	8600390		40SI	12	240	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600398	8600398		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	DRA8600467	8600467		28SI	24	110	J180 Short Hinge
CUSTOMER PART NUMBER	DRA8600468	8600468		28SI	24	110	J180 Long Hinge
CUSTOMER PART NUMBER	DRA8600469	8600469		28SI	24	110	Pad
CUSTOMER PART NUMBER	DRA8600889	8600889		24SI	12	160	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
CUSTOMER PART NUMBER	DRR19020310	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	DRR8600307	8600307		28SI	12	200	J180 Long Hinge
CUSTOMER PART NUMBER	DRS8600066P	8600066		35SI	12	140	Pad
CUSTOMER PART NUMBER	DRS8600310P	8600310		24SI	12	160	J180 Hinge
CUSTOMER PART NUMBER	DRS8600315P	8600315		28SI	12	160	Pad
CUSTOMER PART NUMBER	EDN-A906	8600316		28SI	12	180	Pad
CUSTOMER PART NUMBER	EL-039	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	LN 2824JB	8600308		28SI	12	160	J180 Long Hinge
CUSTOMER PART NUMBER	R10459008		10459008	30SI	12	105	J180 Hinge
CUSTOMER PART NUMBER	R10459065		10459065	26SI	12	85	J180 Hinge
CUSTOMER PART NUMBER	R10459076		10459076	26SI	24	75	J180 Hinge
CUSTOMER PART NUMBER	R10459120		10459120	30SI	24	100	J180 Hinge
CUSTOMER PART NUMBER	R1117655		1117655	20SI	24	35	J180 Hinge
CUSTOMER PART NUMBER	SMR19020310	19020310		22SI	12	150	J180 Hinge
CUSTOMER PART NUMBER	SMR19020889	8600889		24SI	12	160	Pad
CUSTOMER PART NUMBER	W:DR-8600369	8600369		36SI	24	105	J180 Hinge
CUSTOMER PART NUMBER	W0010532	8600316		28SI	12	180	Pad
CUSTOMER PART NUMBER	ZLN110900	8600308		28SI	12	160	J180 Long Hinge
DETROIT DIESEL	R0459008		10459008	30SI	12	105	J180 Hinge
DETROIT DIESEL	R0459132		10459065	26SI	12	85	J180 Hinge
DETROIT DIESEL	R0459136		10459077	26SI	12	75	J180 Hinge
DETROIT DIESEL	R0459137	19010001	10459064	26SI	24	50	J180 Hinge
DETROIT DIESEL	R0459148	19010002/19010000	10459076	26SI	24	75	J180 Hinge
DETROIT DIESEL	R0459151		1117746	30SI	24	60	J180 Hinge
DETROIT DIESEL	R0459196	19011153	10459196	33SI	24	100	J180 Hinge
DETROIT DIESEL	R0459199		10459199	34SI	24	100	Quad
DETROIT DIESEL	R0459201	1117647		20SI	24	35	J180 Hinge
DETROIT DIESEL	R0459207	1117817	10459120	30SI	24	100	J180 Hinge
DETROIT DIESEL	R0459319		10459319	20SI	24	45	J180 Hinge
DETROIT DIESEL	R117655		1117655	20SI	24	35	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DTNA	DR 10459008		10459008	30SI	12	105	J180 Hinge
DTNA	DR 8600043	8600043		24SI	12	160	Pad
DTNA	DR 8600064	8600064		35SI	12	140	J180 Hinge
DTNA	DR 8600201	8600201		28SI	12	160	Pad
DTNA	DR 8600253	8600253		28SI	12	200	Pad
DTNA	DR 8600315	8600315		28SI	12	160	Pad
DTNA	LN 2500LC	8600308		28SI	12	160	J180 Long Hinge
DTNA	LN 8LHA2057VA	19020310		22SI	12	150	J180 Hinge
DTNA	LN AVI160J2008	8600307		28SI	12	200	J180 Long Hinge
DTNA	LN AVI160P2007	8600314		28SI	12	200	Pad
DTNA	LN LBA2108GH	8600308		28SI	12	160	J180 Long Hinge
DTNA	LN LBP2180GH	8600889		24SI	12	160	Pad
DTNA	LN LHA2057VGH	8600308		28SI	12	160	J180 Long Hinge
EUCLID	E820132X		10459065	26SI	12	85	J180 Hinge
FORD	4C4O-10300-CA	19020310		22SI	12	150	J180 Hinge
FORD	4C4O-10300-GA	8600889		24SI	12	160	Pad
FORD	4C4O10300RA	8600338		40SI	12	240	Pad
FORD	4C4Z-10346-ACA	8600889		24SI	12	160	Pad
FORD	4C4Z-10346-CA	19020310		22SI	12	150	J180 Hinge
FORD	4C4Z-10346-GA	8600889		24SI	12	160	Pad
FORD	4C4Z10346RA	8600338		40SI	12	240	Pad
FORD	D4HF-10300-AA		10459077	26SI	12	75	J180 Hinge
FORD	D4HF-10346-CA		10459077	26SI	12	75	J180 Hinge
FORD	D4HZ-10346-A		10459077	26SI	12	75	J180 Hinge
FORD	D7HZ-10346-A		10459077	26SI	12	75	J180 Hinge
FORD	E3HS10346BA	19020310		22SI	12	150	J180 Hinge
FORD	F1HS10346CA	19020310		22SI	12	150	J180 Hinge
FORD	F3HT10300DA	19020310		22SI	12	150	J180 Hinge
FORD	F3HT10300EA	19020310		22SI	12	150	J180 Hinge
FORD	F3HT10300SA		10459065	26SI	12	85	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
FORD	F3HT10300TA		10459065	26SI	12	85	J180 Hinge
FORD	F3HT10300UA		10459065	26SI	12	85	J180 Hinge
FORD	F4HT10300GA	19020310		22SI	12	150	J180 Hinge
FORD	F4HT10300HA	19010166		21SI	12	115	J180 Hinge
FORD	F4HT10300LA	19010166		21SI	12	115	J180 Hinge
FORD	F6HT10300BA	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
FORD	F6HT10300CA	19020310		22SI	12	150	J180 Hinge
FORD	F6HT10300EA	19020310		22SI	12	150	J180 Hinge
FORD	F6HZ-10346-C	19020310		22SI	12	150	J180 Hinge
FORD	F7HS10300AA	8600064		35SI	12	140	J180 Hinge
FORD	F7HS10300CA	8600064		35SI	12	140	J180 Hinge
FORD	F7HS10300DA	8600064		35SI	12	140	J180 Hinge
FORD	F7HZ10346AA		10459077	26SI	12	75	J180 Hinge
FORD	XC4510300AA	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
FORD	XC4510300BA	19020310		22SI	12	150	J180 Hinge
FORD	XC4510300GA	19020310		22SI	12	150	J180 Hinge
FORD	XC4510300JA	19020310		22SI	12	150	J180 Hinge
FORD	XC4510300PA	19020312/ 19020310/8600310		22SI/22SI/24SI	12	100/150/160	J180 Hinge
GENERAL MOTORS	88864167	8600064		35SI	12	140	J180 Hinge
INTERNATIONAL	3517125C91	19020310		22SI	12	150	J180 Hinge
INTERNATIONAL	ZLNBLD3365GH	61000853		40SI	24	160	J180 Long Hinge
KOMATSU	ALT1004	1117647		20SI	24	35	J180 Hinge
KOMATSU	ALT1005		10459077	26SI	12	75	J180 Hinge
KOMATSU	ALT1006		10459064	26SI	24	50	J180 Hinge
KOMATSU	ALT1011		10459120	30SI	24	100	J180 Hinge
KOMATSU	ALT1017		10459076	26SI	24	75	J180 Hinge
KOMATSU	ALT1023	19010108		21SI	24	50	J180 Hinge
KOMATSU	ALT1029		1117655	20SI	24	35	J180 Hinge
KOMATSU	ALT1030		10459196	33SI	24	100	J180 Hinge
MACK	2MJ4125P2	19020310		22SI	12	150	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MACK	20861706	8600338		40SI	12	240	Pad
MACK	20990003	8600127		36SI	12	170	Pad
MACK	21069740	8600066		35SI	12	140	Pad
MACK	21080399	8600628		40SI	12	320	Pad
MACK	21175415	8600889		24SI	12	160	Pad
MACK	22899067	8600094		40SI	12	275	Pad
MACK	25109827	8600308		28SI	12	160	J180 Long Hinge
MACK	25110351	19020889		22SI	12	150	Pad
MACK	25110476	8600889		24SI	12	160	Pad
MACK	2MJ4112P2	8600308		28SI	12	160	J180 Long Hinge
MACK	2MJ4112P6	8600310		24SI	12	160	J180 Hinge
MACK	2MJ4116P8	19020310		22SI	12	150	J180 Hinge
MACK	2MJ4125	19020310		22SI	12	150	J180 Hinge
MACK	2MJ4139	19020396		22SI	12	100	J180 Hinge
MACK	2MJ4143	8600308		28SI	12	160	J180 Long Hinge
MACK	2MJ4144	8600127		36SI	12	170	Pad
MACK	2MJ4145	8600308		28SI	12	160	J180 Long Hinge
MACK	2MJ4148	8600634		40SI	12	320	J180 Long Hinge
MACK	2MJ511AM	19020889		22SI	12	150	Pad
MACK	2MJ512M	8600889		24SI	12	160	Pad
MACK	2MJ516M	8600032		24SI	12	100	J180 Hinge
MACK	2MJ516M2	19020903		24SI	12	130	J180 Hinge
MACK	2MJ516M3	19020901		24SI	12	145	J180 Hinge
MACK	2MJ522M	19020900		24SI	12	145	Pad
MACK	2MJ525M	8600096		24SI	12	100	Pad
MACK	2MJ532M	8600404		24SI	12	145	Pad
MACK	2MJ548	8600707/8600338		38SI/40SI	12	215/240	Pad
MACK	2MJ549M	8600889		24SI	12	160	Pad
MACK	2MJ54A	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
MACK	2MJ554M	8600247		35SI	12	135	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
MACK	2MJ559M	8600127		36SI	12	170	Pad
MACK	2MJ561M	8600402		24SI	12	100	Pad
MACK	2MJ563M	8600404		24SI	12	145	Pad
MACK	2MJ565M	8600338		40SI	12	240	Pad
MACK	5034-110555JHO	19020310		22SI	12	150	J180 Hinge
MACK	5034-2500LC	8600308		28SI	12	160	J180 Long Hinge
MACK	5034-2670LC	8600310		24SI	12	160	J180 Hinge
MACK	5034-4890JB	8600634		40SI	12	320	J180 Long Hinge
MACK	5034-4962PA	8600628		40SI	12	320	Pad
MACK	5034-4977AAH	8600338		40SI	12	240	Pad
MACK	5034-8LHA2054UAH	8600308		28SI	12	160	J180 Long Hinge
MACK	5034-AV1160P2007	8600314		28SI	12	200	Pad
MACK	5034-BLP2303GH	8600066		35SI	12	140	Pad
MACK	5034-BLP2303H	8600066		35SI	12	140	Pad
MERCEDES-BENZ	012-154-20-02	8600658		18SI	12	175	Special
MERCEDES-BENZ	012-154-24-02	8600658		18SI	12	175	Special
MERCEDES-BENZ	012-154-46-02	8600658		18SI	12	175	Special
MERCEDES-BENZ	013-154-17-02	8600658		18SI	12	175	Special
MERCEDES-BENZ	642-154-04-02	8600763		18SI	12	175	Special
MERCURY MARINE	881248	19020706		5SI	12	50	Spool
MERITOR	ALT0060	8600310		24SI	12	160	J180 Hinge
MERITOR	ALT0061	8600889		24SI	12	160	Pad
MERITOR	ALT0070	8600310		24SI	12	160	J180 Hinge
MERITOR	ALT0071	8600889		24SI	12	160	Pad
MERITOR	ALT1240	8600889		24SI	12	160	Pad
MERITOR	ALT1241	8600310		24SI	12	160	J180 Hinge
MERITOR	ALT1243	8600310		24SI	12	160	J180 Hinge
MERITOR	ALT1280	8600314		28SI	12	200	Pad
MERITOR	ALT1282	8600307		28SI	12	200	J180 Long Hinge
MERITOR	ALT3601	8600125		36SI	12	170	Quad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MERITOR	ALT3602	8600126		36SI	12	170	J180 Hinge
MERITOR	ALT3632	8600126		36SI	12	170	J180 Hinge
MERITOR	ALT3640	8600127		36SI	12	170	Pad
MERITOR	ALT3641	8600125		36SI	12	170	Quad
MERITOR	ALT3650	8600127		36SI	12	170	Pad
MERITOR	ALT3651	8600125		36SI	12	170	Quad
MERITOR	ALT3652	8600126		36SI	12	170	J180 Hinge
MERITOR	ALT7005	93076		REFRIGERATION/AUX	12	70	
MERITOR	ALTT141	93076		REFRIGERATION/AUX	12	70	
MIDLAND	RA120000X		10459020	20SI	12	60	J180 Hinge
MIDLAND	RA120001X		1117655	20SI	24	35	J180 Hinge
MIDLAND	RA125002X		10459077	26SI	12	75	J180 Hinge
MIDLAND	RA125003X		10459076	26SI	24	75	J180 Hinge
MIDLAND	RA126001X		10459065	26SI	12	85	J180 Hinge
MIDLAND	RA126002X		10459077	26SI	12	75	J180 Hinge
MIDLAND	RA126003X		10459066	26SI	12	85	J180 Hinge
MIDLAND	RA126005X		10459064	26SI	24	50	J180 Hinge
MIDLAND	RA126006X		10459076	26SI	24	75	J180 Hinge
MIDLAND	RA130002X		10459008	30SI	12	105	J180 Hinge
MIDLAND	RA130008X		10459057	30SI	24	75	J180 Hinge
MIDLAND	RA601000X	61013382		REFRIGERATION/AUX	12	37	
MIDLAND	RA601010X	93070		REFRIGERATION/AUX	12	65	
MOTORCRAFT	GL-170		10459077	26SI	12	75	J180 Hinge
MOTORCRAFT	GL-192		10459077	26SI	12	75	J180 Hinge
MOTORCRAFT	GL-365	8600310		24SI	12	160	J180 Hinge
MOTORCRAFT	GL-366	8600310		24SI	12	160	J180 Hinge
MPA NEW	67252N		10459076	26SI	24	75	J180 Hinge
MPA NEW	67255N		10459077	26SI	12	75	J180 Hinge
MPA NEW	67467N		10459319	20SI	24	45	J180 Hinge
MPA NEW	67478	93088		REFRIGERATION/AUX	12	65	

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MPA NEW	67649N		10459065	26SI	12	85	J180 Hinge
MPA NEW	67940N		10459008	30SI	12	105	J180 Hinge
MPA NEW	68079N	19020310		22SI	12	150	J180 Hinge
MPA REMAN	612223	61013382		REFRIGERATION/AUX	12	37	
MPA REMAN	612224	93070/93082		REFRIGERATION/AUX	12	65/120	
MPA REMAN	612333	93082		REFRIGERATION/AUX	12	120	
MPA REMAN	612334	93082		REFRIGERATION/AUX	12	120	
MPA REMAN	612459	93076		REFRIGERATION/AUX	12	70	
MPA REMAN	612460	93076		REFRIGERATION/AUX	12	70	
MPA REMAN	67252		10459076	26SI	24	75	J180 Hinge
MPA REMAN	67255		10459077	26SI	12	75	J180 Hinge
MPA REMAN	67262		10459008	30SI	12	105	J180 Hinge
MPA REMAN	67344	93073		REFRIGERATION/AUX	12	65	
MPA REMAN	67379	93087		REFRIGERATION/AUX	12	37	
MPA REMAN	67467		10459319	20SI	24	45	J180 Hinge
MPA REMAN	67597	93081		REFRIGERATION/AUX	12	23	
MPA REMAN	67649		10459065	26SI	12	85	J180 Hinge
MPA REMAN	67674		10459065	26SI	12	85	J180 Hinge
MPA REMAN	67940		10459008	30SI	12	105	J180 Hinge
MPA REMAN	68060		10459065	26SI	12	85	J180 Hinge
MPA REMAN	68079	19020310		22SI	12	150	J180 Hinge
MPA REMAN	68362	19020889		22SI	12	150	Pad
MPA REMAN	68427	93087/93088		REFRIGERATION/AUX	12	37/65	
MPA REMAN	68616	93087		REFRIGERATION/AUX	12	37	
MPA REMAN	68617	93083		REFRIGERATION/AUX	12	90	
MPA REMAN	68618	93090		REFRIGERATION/AUX	12	65	
MPA REMAN	68619	93074		REFRIGERATION/AUX	12	65	
MPA XTREME NEW	X67255N		10459077	26SI	12	75	J180 Hinge
MPA XTREME NEW	X67467N		10459319	20SI	24	45	J180 Hinge
MPA XTREME NEW	X67649N		10459065	26SI	12	85	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MPA XTREME NEW	X67673N	19020310		22SI	12	150	J180 Hinge
MPA XTREME NEW	X67679N	19020310		22SI	12	150	J180 Hinge
MPA XTREME NEW	X67940N		10459008	30SI	12	105	J180 Hinge
MPA XTREME NEW	X68079N	19020310		22SI	12	150	J180 Hinge
MPA XTREME NEW	X68362N	19020889		22SI	12	150	Pad
MPA XTREME REMAN	X67255		10459077	26SI	12	75	J180 Hinge
MPA XTREME REMAN	X67467		10459319	20SI	24	45	J180 Hinge
MPA XTREME REMAN	X67649		10459065	26SI	12	85	J180 Hinge
MPA XTREME REMAN	X67674		10459065	26SI	12	85	J180 Hinge
MPA XTREME REMAN	X67679	19020310		22SI	12	150	J180 Hinge
MPA XTREME REMAN	X67940		10459008	30SI	12	105	J180 Hinge
MPA XTREME REMAN	X68060		10459065	26SI	12	85	J180 Hinge
MPA XTREME REMAN	X68065		10459065	26SI	12	85	J180 Hinge
MPA XTREME REMAN	X68066		10459077	26SI	12	75	J180 Hinge
MPA XTREME REMAN	X68079	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1258304C	8600310		24SI	12	160	J180 Hinge
NAVISTAR	1258304C91	8600310		24SI	12	160	J180 Hinge
NAVISTAR	1258304C92	8600310		24SI	12	160	J180 Hinge
NAVISTAR	1616025C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	16183118	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	16183118C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	16183118C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	1664631	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1664631C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1664631C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1664632	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1664632C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1664632C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1697255	19020310		22SI	12	150	J180 Hinge
NAVISTAR	1697255C91	19020310		22SI	12	150	J180 Hinge

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
NAVISTAR	1697255C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	2030262C91	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	2507146	8600300		40SI	12	300	J180 Long Hinge
NAVISTAR	2507146C91	8600300		40SI	12	300	J180 Long Hinge
NAVISTAR	2507146C92	8600300		40SI	12	300	J180 Long Hinge
NAVISTAR	2507416C91	8600634		40SI	12	320	J180 Long Hinge
NAVISTAR	3512058	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3512058C91	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3512058C92	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3513615C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3514998C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3514998C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3514998C93	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3517186C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3518165C91	8600390		40SI	12	240	J180 Long Hinge
NAVISTAR	3518520C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3518520C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3518520C93	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3519105C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3519105C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3519105C93	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3521047	8600280		40SI	12	275	J180 Long Hinge
NAVISTAR	3521047C91	8600280		40SI	12	275	J180 Long Hinge
NAVISTAR	3521047C92	8600280		40SI	12	275	J180 Long Hinge
NAVISTAR	3554455	8600064		35SI	12	140	J180 Hinge
NAVISTAR	3554455C91	8600064		35SI	12	140	J180 Hinge
NAVISTAR	3558037P91	8600126		36SI	12	170	J180 Hinge
NAVISTAR	3558756	19020889		22SI	12	150	Pad
NAVISTAR	3558756C91	19020889		22SI	12	150	Pad
NAVISTAR	3558756C92	19020889		22SI	12	150	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
NAVISTAR	3558757	19020889		22SI	12	150	Pad
NAVISTAR	3558757C91	8600889		24SI	12	160	Pad
NAVISTAR	3558757C92	19020889		22SI	12	150	Pad
NAVISTAR	3564536C91	8600126		36SI	12	170	J180 Hinge
NAVISTAR	3568557C91	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3571135	8600094		40SI	12	275	Pad
NAVISTAR	3571135C91	8600094		40SI	12	275	Pad
NAVISTAR	3571135C92	8600094		40SI	12	275	Pad
NAVISTAR	3574171	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3574171C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3574171C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3574171C93	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3574477C91	8600314		28SI	12	200	Pad
NAVISTAR	3574551	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3574551C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3574551C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3576266C91	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3576266C92	8600064		35SI	12	140	J180 Hinge
NAVISTAR	3576266C93	8600064		35SI	12	140	J180 Hinge
NAVISTAR	3578445C92	8600310		24SI	12	160	J180 Hinge
NAVISTAR	3579498C91	8600889		24SI	12	160	Pad
NAVISTAR	3580410C91	8600634		40SI	12	320	J180 Long Hinge
NAVISTAR	3580988	8600314		28SI	12	200	Pad
NAVISTAR	3580988C1	8600314		28SI	12	200	Pad
NAVISTAR	3580988C91	8600314/8600707/ 8600338		28SI/38SI/40SI	12	200/215/240	Pad
NAVISTAR	3580988C92	8600314		28SI	12	200	Pad
NAVISTAR	3582070	8600127		36SI	12	170	Pad
NAVISTAR	3582070921	8600127		36SI	12	170	Pad
NAVISTAR	3582070C91	8600127		36SI	12	170	Pad
NAVISTAR	3582070C92	8600127		36SI	12	170	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
NAVISTAR	3582072	8600066		35SI	12	140	Pad
NAVISTAR	3582072C91	8600127		36SI	12	170	Pad
NAVISTAR	3582072C92	8600066		35SI	12	140	Pad
NAVISTAR	3582185	8600889		24SI	12	160	Pad
NAVISTAR	3582185C91	8600889		24SI	12	160	Pad
NAVISTAR	3582185C92	8600889		24SI	12	160	Pad
NAVISTAR	3586537C91	8600889/8600127		24SI/36SI	12	160/170	Pad
NAVISTAR	3588319C91	8600628		40SI	12	320	Pad
NAVISTAR	3588319C92	8600298		40SI	12	300	Pad
NAVISTAR	3588319C93	8600298		40SI	12	300	Pad
NAVISTAR	3591698	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3591698C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3591698C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	3660946	8600127		36SI	12	170	Pad
NAVISTAR	3660946C91	8600127		36SI	12	170	Pad
NAVISTAR	3660946C92	8600127		36SI	12	170	Pad
NAVISTAR	3660946C93	8600127		36SI	12	170	Pad
NAVISTAR	3667812C91	8600315		28SI	12	160	Pad
NAVISTAR	3667912	8600889/8600315		24SI/28SI	12	160	Pad
NAVISTAR	3667912C91	8600889/8600315		24SI/28SI	12	160	Pad
NAVISTAR	3667912C92	8600889/8600315		24SI/28SI	12	160	Pad
NAVISTAR	3674775	8600315		28SI	12	160	Pad
NAVISTAR	3674775C91	8600315		28SI	12	160	Pad
NAVISTAR	3674775C92	8600315		28SI	12	160	Pad
NAVISTAR	3674776	8600314		28SI	12	200	Pad
NAVISTAR	3674776C91	8600314		28SI	12	200	Pad
NAVISTAR	3674776C92	8600314		28SI	12	200	Pad
NAVISTAR	3688328C91	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3700148	8600316		28SI	12	180	Pad
NAVISTAR	3700148C91	8600316		28SI	12	180	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
NAVISTAR	3700148C92	8600316		28SI	12	180	Pad
NAVISTAR	3700150	8600889		24SI	12	160	Pad
NAVISTAR	3700150C91	8600889		24SI	12	160	Pad
NAVISTAR	3700150C92	8600889		24SI	12	160	Pad
NAVISTAR	3700150C93	8600889		24SI	12	160	Pad
NAVISTAR	3700301	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3700301C92	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	3711092	8600338		40SI	12	240	Pad
NAVISTAR	3711092C91	8600338		40SI	12	240	Pad
NAVISTAR	3711092C92	8600338		40SI	12	240	Pad
NAVISTAR	3711093C93	8600628		40SI	12	320	Pad
NAVISTAR	3711093C94	8600628		40SI	12	320	Pad
NAVISTAR	3718541C91	8600298		40SI	12	300	Pad
NAVISTAR	3718541C92	8600298		40SI	12	300	Pad
NAVISTAR	3718541C93	8600298		40SI	12	300	Pad
NAVISTAR	3721717C91	8600338		40SI	12	240	Pad
NAVISTAR	3721717C92	8600338		40SI	12	240	Pad
NAVISTAR	3721717C93	8600338		40SI	12	240	Pad
NAVISTAR	3724566	8600315		28SI	12	160	Pad
NAVISTAR	3724566C91	8600315		28SI	12	160	Pad
NAVISTAR	3724566C92	8600315		28SI	12	160	Pad
NAVISTAR	3725773C91	8600315		28SI	12	160	Pad
NAVISTAR	3725773C93	8600315		28SI	12	160	Pad
NAVISTAR	3813036	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3813036C91	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3813036C92	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	3813037C91	8600314/8600707		28SI/38SI	12	200/215	Pad
NAVISTAR	3819198	8600314		28SI	12	200	Pad
NAVISTAR	3819198C91	8600314/8600707		28SI/38SI	12	200/215	Pad
NAVISTAR	3819198C92	8600314		28SI	12	200	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
NAVISTAR	3828210C91	8600314		28SI	12	200	Pad
NAVISTAR	3828211C91	8600314		28SI	12	200	Pad
NAVISTAR	3831010C91	8600314		28SI	12	200	Pad
NAVISTAR	3837340	8600314		28SI	12	200	Pad
NAVISTAR	3837340C91	8600314		28SI	12	200	Pad
NAVISTAR	3837340C92	8600314		28SI	12	200	Pad
NAVISTAR	3837340C93	8600314		28SI	12	200	Pad
NAVISTAR	3837344	8600314		28SI	12	200	Pad
NAVISTAR	3837344C91	8600314		28SI	12	200	Pad
NAVISTAR	3837344C92	8600314		28SI	12	200	Pad
NAVISTAR	3837344C93	8600314		28SI	12	200	Pad
NAVISTAR	3863007C92	8600316		28SI	12	180	Pad
NAVISTAR	3867569	8600315		28SI	12	160	Pad
NAVISTAR	3867569C91	8600315		28SI	12	160	Pad
NAVISTAR	3867569C92	8600315		28SI	12	160	Pad
NAVISTAR	3867569C93	8600315		28SI	12	160	Pad
NAVISTAR	3867569C94	8600315		28SI	12	160	Pad
NAVISTAR	3867570	8600314		28SI	12	200	Pad
NAVISTAR	3867570C91	8600314		28SI	12	200	Pad
NAVISTAR	3867570C92	8600314		28SI	12	200	Pad
NAVISTAR	3867570C93	8600314		28SI	12	200	Pad
NAVISTAR	3959202C91	8600315		28SI	12	160	Pad
NAVISTAR	4024553C91	8600889		24SI	12	160	Pad
NAVISTAR	4024553C92	8600889		24SI	12	160	Pad
NAVISTAR	4024553C93	8600315		28SI	12	160	Pad
NAVISTAR	4024554C91	8600314		28SI	12	200	Pad
NAVISTAR	4024554C92	8600314		28SI	12	200	Pad
NAVISTAR	4028274C91	8600314		28SI	12	200	Pad
NAVISTAR	4028274C92	8600314		28SI	12	200	Pad
NAVISTAR	4053026C91	8600094		40SI	12	275	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
NAVISTAR	4053026C92	8600094		40SI	12	275	Pad
NAVISTAR	4078653	8600707		38SI	12	215	Pad
NAVISTAR	4078653C91	8600707		38SI	12	215	Pad
NAVISTAR	4078653C92	8600707		38SI	12	215	Pad
NAVISTAR	4078653C93	8600707		38SI	12	215	Pad
NAVISTAR	4890JB	8600634		40SI	12	320	J180 Long Hinge
NAVISTAR	513542	19020310		22SI	12	150	J180 Hinge
NAVISTAR	513542C91	19020310		22SI	12	150	J180 Hinge
NAVISTAR	513542C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	514089	19020310		22SI	12	150	J180 Hinge
NAVISTAR	514089C92	19020310		22SI	12	150	J180 Hinge
NAVISTAR	585946	19020310		22SI	12	150	J180 Hinge
NAVISTAR	586986C91	1117641		20SI	12	60	J180 Hinge
NAVISTAR	61020565	8600314		28SI	12	200	Pad
NAVISTAR	61025066	8600315		28SI	12	160	Pad
NAVISTAR	GL-558-RM	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	GL-576	19020889		22SI	12	150	Pad
NAVISTAR	GL-581	8600314		28SI	12	200	Pad
NAVISTAR	GL-595	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	GL-982	8600066		35SI	12	140	Pad
NAVISTAR	N3582070C91	8600127		36SI	12	170	Pad
NAVISTAR	ZLN2500LC	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	ZLN4890JB	8600634		40SI	12	320	J180 Long Hinge
NAVISTAR	ZLN4975PAA	8600094		40SI	12	275	Pad
NAVISTAR	ZLN8LHA2054UAH	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	ZLNAVI160J2008	8600307		28SI	12	200	J180 Long Hinge
NAVISTAR	ZLNAVI160P2007	8600314		28SI	12	200	Pad
NAVISTAR	ZLNBLP2190H	19020889		22SI	12	150	Pad
NAVISTAR	ZLNBLP2303GH	8600066		35SI	12	140	Pad
NAVISTAR	ZLNBLP2303H	8600066		35SI	12	140	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
NAVISTAR	ZLNLBA2108GH	8600308		28SI	12	160	J180 Long Hinge
NAVISTAR	ZLNLBP2180GH	8600889		24SI	12	160	Pad
NAVISTAR	ZZRA122002X	19020310		22SI	12	150	J180 Hinge
NAVISTAR FLEETRITE	135140P	8600889/8600127		24SI/36SI	12	160/170	Pad
NAVISTAR FLEETRITE	FLT1000060	8600310		24SI	12	160	J180 Hinge
NAVISTAR FLEETRITE	FLT1000061	8600889		24SI	12	160	Pad
NAVISTAR FLEETRITE	FLT100055J	8600308/8600311		28SI	12	160/180	J180 Long Hinge
NAVISTAR FLEETRITE	FLT100055P	8600315/8600316		28SI	12	160/180	Pad
NAVISTAR FLEETRITE	FLT1001003	19020889		22SI	12	150	Pad
NAVISTAR FLEETRITE	FLT1001004	19020310		22SI	12	150	J180 Hinge
NAVISTAR FLEETRITE	FLT1001240	8600889		24SI	12	160	Pad
NAVISTAR FLEETRITE	FLT1001241	8600310		24SI	12	160	J180 Hinge
NAVISTAR FLEETRITE	FLT1001281	8600313		28SI	12	200	J180 Short Hinge
NAVISTAR FLEETRITE	FLT1003500	8600127		36SI	12	170	Pad
NAVISTAR FLEETRITE	FLT1003640	8600127		36SI	12	170	Pad
NAVISTAR FLEETRITE	FLT1003650	8600066		35SI	12	140	Pad
NAVISTAR FLEETRITE	FLTAL135140J	8600310/8600126		24SI/36SI	12	160/170	J180 Hinge
NAVISTAR FLEETRITE	FLTAL135140P	8600889/8600127		24SI/36SI	12	160/170	Pad
OSHKOSH	112067C	8600308		28SI	12	160	J180 Long Hinge
OSHKOSH	115347BU	8600308		28SI	12	160	J180 Long Hinge
OSHKOSH	6HA518	8600308		28SI	12	160	J180 Long Hinge
OTTAWA	90033541	8600310		24SI	12	160	J180 Hinge
PACCAR	02760010130P	8600889/8600127		24SI/36SI	12	160/170	Pad
PACCAR	10459008RMAN		10459008	30SI	12	105	J180 Hinge
PACCAR	4977AAH	8600338		40SI	12	240	Pad
PACCAR	D2160010130P	8600889		24SI	12	160	Pad
PACCAR	D27-1006-0160J	8600310/8600126		24SI/36SI	12	160/170	J180 Hinge
PACCAR	D27-1006-0160P	8600889/8600127		24SI/36SI	12	160/170	Pad
PACCAR	D27-1009-0160P	8600889/8600127		24SI/36SI	12	160/170	Pad
PACCAR	D271009160P	8600889		24SI	12	160	Pad

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
PACCAR	D2710160160P	8600127		36SI	12	170	Pad
PACCAR	D2710190200P	8600314/8600338		28SI/40SI	12	200/240	Pad
PACCAR	D2710200160P	8600889		24SI	12	160	Pad
PACCAR	D27-3001-0130J	8600126		36SI	12	170	J180 Hinge
PACCAR	D27-6001-00000	8600127		36SI	12	170	Pad
PACCAR	D27-6001-0130J	8600310/8600126		24SI/36SI	12	160/170	J180 Hinge
PACCAR	D27-6001-0130P	8600889/8600127		24SI/36SI	12	160/170	Pad
PACCAR	D27-6001-013P	8600127		36SI	12	170	Pad
PACCAR	D27-6001-0150P	8600889		24SI	12	160	Pad
PACCAR	D27-6001-1030P	8600127		36SI	12	170	Pad
PACCAR	D276001130P	8600889/8600127		24SI/36SI	12	160/170	Pad
PACCAR	D27-6006-00001	8600889		24SI	12	160	Pad
PACCAR	K371-208-1	8600308		28SI	12	160	J180 Long Hinge
PACCAR	LBA2108GH	8600308		28SI	12	160	J180 Long Hinge
PACCAR	LBP2180GH	8600889		24SI	12	160	Pad
PACCAR TRP	RE022J	19020310		22SI	12	150	J180 Hinge
PACCAR TRP	RE022P	19020889		22SI	12	150	Pad
PACCAR TRP	RE035J	8600064		35SI	12	140	J180 Hinge
PACCAR TRP	RE035P	8600066		35SI	12	140	Pad
PACCAR TRP	RE555J	8600310		24SI	12	160	J180 Hinge
PACCAR TRP	RE555P	19020889		22SI	12	150	Pad
PACCAR TRP	REO22J	19020310		22SI	12	150	J180 Hinge
PACCAR TRP	REO22P	19020889		22SI	12	150	Pad
PERKINS	185046220	93099		REFRIGERATION/AUX	12	40	
PERKINS	185046470	93098		REFRIGERATION/AUX	12	60	
REFERENCE NUMBER	272-1889	8600668		40SI	24	160	Pad
REFERENCE NUMBER	34014-86	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	352-4700	8600668		40SI	24	160	Pad
REFERENCE NUMBER	561-3001	8600497		36SI	24	105	Pad
REFERENCE NUMBER	561-3002	8600668		40SI	24	160	Pad

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
REFERENCE NUMBER	029946V001	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	0765-GG1	8600628		40SI	12	320	Pad
REFERENCE NUMBER	0R1522	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	0R3667	19010001	10459064	26SI	24	50	J180 Hinge
REFERENCE NUMBER	0R3749	8600468		28SI	24	110	J180 Long Hinge
REFERENCE NUMBER	0R4843	19011153		33SI	24	100	J180 Hinge
REFERENCE NUMBER	0R5202	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	0R5203	8600468		28SI	24	110	J180 Long Hinge
REFERENCE NUMBER	10044861	8600628/61006079		40SI/55SI	12	320/430	Pad/ Long Pad(105mm)
REFERENCE NUMBER	1012118270	19011153		33SI	24	100	J180 Hinge
REFERENCE NUMBER	10479976	8600310		24SI	12	160	J180 Hinge
REFERENCE NUMBER	10R-1919		10459020	20SI	12	60	J180 Hinge
REFERENCE NUMBER	10R-8755	1117817		30SI	24	100	J180 Hinge
REFERENCE NUMBER	10R9789	19011153		33SI	24	100	J180 Hinge
REFERENCE NUMBER	1242326	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	12651N	93098		REFRIGERATION/AUX	12	60	
REFERENCE NUMBER	14967AA	8600066		35SI	12	140	Pad
REFERENCE NUMBER	1779953	19011153		33SI	24	100	J180 Hinge
REFERENCE NUMBER	1902310	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	1920310	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	1OR-1919		10459020	20SI	12	60	J180 Hinge
REFERENCE NUMBER	200619	8600668		40SI	24	160	Pad
REFERENCE NUMBER	20R0053	8600668		40SI	24	160	Pad
REFERENCE NUMBER	2267683	8600469		28SI	24	110	Pad
REFERENCE NUMBER	30000VL	19020889		22SI	12	150	Pad
REFERENCE NUMBER	3026259	61000853		40SI	24	160	J180 Long Hinge
REFERENCE NUMBER	310000019	8600628		40SI	12	320	Pad
REFERENCE NUMBER	3167251	1117817		30SI	24	100	J180 Hinge
REFERENCE NUMBER	3603854RX	19011164		33SI	12	110	J180 Hinge
REFERENCE NUMBER	3972730	8600030		11SI	12	95	Spool

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
REFERENCE NUMBER	3975140	61000853		40SI	24	160	J180 Long Hinge
REFERENCE NUMBER	3E7578	19010001		26SI	24	50	J180 Hinge
REFERENCE NUMBER	3T7070	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	4890J	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	4N3986	8600468		28SI	24	110	J180 Long Hinge
REFERENCE NUMBER	52009	19020606		7SI	12	70	Spool
REFERENCE NUMBER	5282740	8600142		24SI	12	160	J180 Hinge
REFERENCE NUMBER	5282843	8600016		24SI	24	70	Pad
REFERENCE NUMBER	5523949	8600142		24SI	12	160	J180 Hinge
REFERENCE NUMBER	5523953	8600201		28SI	12	160	Pad
REFERENCE NUMBER	5523955	8600426		28SI	12	200	J180 Short Hinge
REFERENCE NUMBER	61210310	8600628		40SI	12	320	Pad
REFERENCE NUMBER	6306579	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	6N-9294	1117647		20SI	24	35	J180 Hinge
REFERENCE NUMBER	710035095	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	710035096	8600628		40SI	12	320	Pad
REFERENCE NUMBER	8200310	8600310		24SI	12	160	J180 Hinge
REFERENCE NUMBER	86000064	8600064		35SI	12	140	J180 Hinge
REFERENCE NUMBER	86000066	8600066		35SI	12	140	Pad
REFERENCE NUMBER	86000310	8600310		24SI	12	160	J180 Hinge
REFERENCE NUMBER	86000315	8600315		28SI	12	160	Pad
REFERENCE NUMBER	86000889	8600889		24SI	12	160	Pad
REFERENCE NUMBER	860064	8600064		35SI	12	140	J180 Hinge
REFERENCE NUMBER	860089	8600889		24SI	12	160	Pad
REFERENCE NUMBER	860889	8600889		24SI	12	160	Pad
REFERENCE NUMBER	8743N	8600313		28SI	12	200	J180 Short Hinge
REFERENCE NUMBER	8C3595	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
REFERENCE NUMBER	9X6796	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	9X7803	1117817		30SI	24	100	J180 Hinge
REFERENCE NUMBER	9X9796	8600308		28SI	12	160	J180 Long Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Serivce	Reman				
REFERENCE NUMBER	A0121542402	8600658		18SI	12	175	Special
REFERENCE NUMBER	A0131541502	8600658		18SI	12	175	Special
REFERENCE NUMBER	ADR0007	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0100	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0101	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0203	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0205	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0213	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0218	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	ADR0226	19020310		22SI	12	150	J180 Hinge
REFERENCE NUMBER	AL122150J	19020310/8600310		22SI/24SI	12	150/160	J180 Hinge
REFERENCE NUMBER	AL124160P	8600889		24SI	12	160	Pad
REFERENCE NUMBER	AL128200P	8600314		28SI	12	200	Pad
REFERENCE NUMBER	AL135140P	8600127		36SI	12	170	Pad
REFERENCE NUMBER	ALT22H	8600310		24SI	12	160	J180 Hinge
REFERENCE NUMBER	ALT22P	8600889		24SI	12	160	Pad
REFERENCE NUMBER	DELCO10479976	8600310		24SI	12	160	J180 Hinge
REFERENCE NUMBER	DR 8600424	8600424		28SI	12	160	J180 Short Hinge
REFERENCE NUMBER	DR 8600552	8600707		38SI	12	215	Pad
REFERENCE NUMBER	EE9244	8600142		24SI	12	160	J180 Hinge
REFERENCE NUMBER	EE9247	8600017		24SI	24	70	J180 Hinge
REFERENCE NUMBER	FLT1001280	8600314		28SI	12	200	Pad
REFERENCE NUMBER	OR-1699		10459008	30SI	12	105	J180 Hinge
REFERENCE NUMBER	OR-2698	1117619	10459319	20SI	24	50	J180 Hinge
REFERENCE NUMBER	OR-3615	19010002	10459076	26SI	24	75	J180 Hinge
REFERENCE NUMBER	OR-3616		10459065	26SI	12	85	J180 Hinge
REFERENCE NUMBER	OR-3749	1117817	10459120	30SI	24	100	J180 Hinge
REFERENCE NUMBER	OR-5203		1117746	30SI	24	60	J180 Hinge
REFERENCE NUMBER	OR-5204	1117733		30SI	32	60	J180 Hinge
REFERENCE NUMBER	OR-5206	19010001	10459064	26SI	24	50	J180 Hinge

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
REFERENCE NUMBER	OR-5217	1117647	1117655	20SI	24	35	J180 Hinge
REFERENCE NUMBER	P1821100	8600634		40SI	12	320	J180 Long Hinge
REFERENCE NUMBER	P2112500	8600628		40SI	12	320	Pad
REFERENCE NUMBER	P2303100	8600634		40SI	12	320	J180 Long Hinge
THERMOKING	42-367	61013383		REFRIGERATION/AUX	12	65A	
THERMOKING	41-0749	93096		REFRIGERATION/AUX	12	40	
THERMOKING	41-2194	93081		REFRIGERATION/AUX	12	23	
THERMOKING	41-2195	93088		REFRIGERATION/AUX	12	65	
THERMOKING	41-2196	93088		REFRIGERATION/AUX	12	65	
THERMOKING	41-2197	93088		REFRIGERATION/AUX	12	65	
THERMOKING	41-2198	93087		REFRIGERATION/AUX	12	37	
THERMOKING	41-2199	93087		REFRIGERATION/AUX	12	37	
THERMOKING	41-2571	93082		REFRIGERATION/AUX	12	120	
THERMOKING	41-2705	93083		REFRIGERATION/AUX	12	90	
THERMOKING	41-3372	93102		REFRIGERATION/AUX	12	105	
THERMOKING	41-5456	93082		REFRIGERATION/AUX	12	120	
THERMOKING	41-5457	93070		REFRIGERATION/AUX	12	65	
THERMOKING	41-5458	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	41-6780	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	41-6781	93070		REFRIGERATION/AUX	12	65	
THERMOKING	41-6782	93082		REFRIGERATION/AUX	12	120	
THERMOKING	41-6990	93095		REFRIGERATION/AUX	12	65	
THERMOKING	41-8461	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	41-8463	93070		REFRIGERATION/AUX	12	65	
THERMOKING	41-8465	93082		REFRIGERATION/AUX	12	120	
THERMOKING	41-9586	61013383		REFRIGERATION/AUX	12	65A	
THERMOKING	41-9856	93095		REFRIGERATION/AUX	12	65	
THERMOKING	41-9925	61013384		REFRIGERATION/AUX	12	120	
THERMOKING	44-7156	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-7924	93081		REFRIGERATION/AUX	12	23	

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
THERMOKING	44-7925	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-7926	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-7927	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8091	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8901	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8902	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8903	93081		REFRIGERATION/AUX	12	23	
THERMOKING	44-8904	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8939	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8940	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-8949	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	44-8950	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	44-9571	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	44-9572	93070		REFRIGERATION/AUX	12	65	
THERMOKING	44-9716	93082		REFRIGERATION/AUX	12	120	
THERMOKING	44-9750	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-9751	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-9753	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-9754	93088		REFRIGERATION/AUX	12	65	
THERMOKING	44-9755	93088		REFRIGERATION/AUX	12	65	
THERMOKING	45-1706	93083		REFRIGERATION/AUX	12	90	
THERMOKING	45-2254	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	45-2256	93070		REFRIGERATION/AUX	12	65	
THERMOKING	45-2257	93095		REFRIGERATION/AUX	12	65	
THERMOKING	45-2258	93082		REFRIGERATION/AUX	12	120	
THERMOKING	45-2259	93094		REFRIGERATION/AUX	12	120	
THERMOKING	45-2498	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	45-2589	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	45-2590	93070		REFRIGERATION/AUX	12	65	
THERMOKING	45-2591	93082		REFRIGERATION/AUX	12	120	

Alternator

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
THERMOKING	45-2592	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	45-2593	93070		REFRIGERATION/AUX	12	65	
THERMOKING	45-2594	93082		REFRIGERATION/AUX	12	120	
THERMOKING	45-2595	61013383		REFRIGERATION/AUX	12	65A	
THERMOKING	45-2597	93095		REFRIGERATION/AUX	12	65	
THERMOKING	45-2668	61013383		REFRIGERATION/AUX	12	65A	
THERMOKING	45-2671	61013384		REFRIGERATION/AUX	12	120	
THERMOKING	45-2672	61013383		REFRIGERATION/AUX	12	65A	
THERMOKING	45-2675	61013384		REFRIGERATION/AUX	12	120	
THERMOKING	45-2695	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	45-2697	93070		REFRIGERATION/AUX	12	65	
THERMOKING	45-2699	93094/93082		REFRIGERATION/AUX	12	120	
THERMOKING	45-2775	93082		REFRIGERATION/AUX	12	120	
THERMOKING	45-2776	93070		REFRIGERATION/AUX	12	65	
THERMOKING	45-2777	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	841-5456	93082		REFRIGERATION/AUX	12	120	
THERMOKING	841-5457	93070		REFRIGERATION/AUX	12	65	
THERMOKING	841-5458	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	841-8461	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	841-8463	93070		REFRIGERATION/AUX	12	65	
THERMOKING	841-8464	93095		REFRIGERATION/AUX	12	65	
THERMOKING	841-8465	93082		REFRIGERATION/AUX	12	120	
THERMOKING	844-7925	93088		REFRIGERATION/AUX	12	65	
THERMOKING	844-9571	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	844-9572	93070		REFRIGERATION/AUX	12	65	
THERMOKING	845-2254	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	845-2256	93070		REFRIGERATION/AUX	12	65	
THERMOKING	845-2258	93082		REFRIGERATION/AUX	12	120	
THERMOKING	845-2589	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	845-2590	93070		REFRIGERATION/AUX	12	65	

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
THERMOKING	845-2591	93082		REFRIGERATION/AUX	12	120	
THERMOKING	845-2596	61013384		REFRIGERATION/AUX	12	120	
THERMOKING	845-2681	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	845-2682	93070		REFRIGERATION/AUX	12	65	
THERMOKING	10-41-2198	93087		REFRIGERATION/AUX	12	37	
THERMOKING	10-41-2199	93087		REFRIGERATION/AUX	12	37	
THERMOKING	10-41-2571	93082		REFRIGERATION/AUX	12	120	
THERMOKING	10-41-5456	93082		REFRIGERATION/AUX	12	120	
THERMOKING	10-44-9572	93070		REFRIGERATION/AUX	12	65	
THERMOKING	20-41-2198	93087		REFRIGERATION/AUX	12	37	
THERMOKING	10-41-5457B	93070		REFRIGERATION/AUX	12	65	
THERMOKING	10-41-5458B	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	1E32215G01	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	1E32216G01	93070		REFRIGERATION/AUX	12	65	
THERMOKING	1E32217G01	93082		REFRIGERATION/AUX	12	120	
THERMOKING	1E51761G01	93070		REFRIGERATION/AUX	12	65	
THERMOKING	2D72786G03	93087		REFRIGERATION/AUX	12	37	
THERMOKING	2E00204G02	93095		REFRIGERATION/AUX	12	65	
THERMOKING	3D97386G01	93088		REFRIGERATION/AUX	12	65	
THERMOKING	3D97386G02	93087		REFRIGERATION/AUX	12	37	
THERMOKING	3D97386G03	93087		REFRIGERATION/AUX	12	37	
THERMOKING	4116D22G03	93087		REFRIGERATION/AUX	12	37	
THERMOKING	41-5456B	93082		REFRIGERATION/AUX	12	120	
THERMOKING	452596	93094		REFRIGERATION/AUX	12	120	
THERMOKING	5D33839G01	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	5D33841G01	93070		REFRIGERATION/AUX	12	65	
THERMOKING	5D35741G01	93088		REFRIGERATION/AUX	12	65	
THERMOKING	5D35741G02	93087		REFRIGERATION/AUX	12	37	
THERMOKING	5D35741G03	93087		REFRIGERATION/AUX	12	37	
THERMOKING	5D35741G04	93087		REFRIGERATION/AUX	12	37	

Alternator Index By OE Numbers

OEM	OE Numbers	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
THERMOKING	5D38603G01	61013382		REFRIGERATION/AUX	12	37	
THERMOKING	5D38604G01	93070		REFRIGERATION/AUX	12	65	
THERMOKING	5D44466G01	93087		REFRIGERATION/AUX	12	37	
THERMOKING	5D44466G02	93087		REFRIGERATION/AUX	12	37	
THERMOKING	5D46047G01	93083		REFRIGERATION/AUX	12	90	
THERMOKING	5D50461G01	93082		REFRIGERATION/AUX	12	120	
THERMOKING	5D52972G01	93102		REFRIGERATION/AUX	12	105	
THERMOKING	P-96-101-21K	93097		REFRIGERATION/AUX	12	60	
THERMOKING	P-96-111-02K	93096		REFRIGERATION/AUX	12	40	
VOLVO	22988037	8600707		38SI	12	215	Pad
VOLVO	85110757	8600127		36SI	12	170	Pad
VOLVO	85111462	8600311/8600307		28SI	12	180/200	J180 Long Hinge
VOLVO - TRUCK	18700018	8600127		36SI	12	170	Pad
VOLVO - TRUCK	20861706	8600707/8600338		38SI/40SI	12	215/240	Pad
VOLVO - TRUCK	21076610	8600127		36SI	12	170	Pad
VOLVO - TRUCK	21590237	8600314		28SI	12	200	Pad
VOLVO - TRUCK	21654110	8600094		40SI	12	275	Pad
VOLVO - TRUCK	21687315	8600889		24SI	12	160	Pad
VOLVO - TRUCK	21749781	8600314		28SI	12	200	Pad
VOLVO - TRUCK	21820791	8600127		36SI	12	170	Pad
VOLVO - TRUCK	22447736	8600315		28SI	12	160	Pad
VOLVO - TRUCK	23931504	8600315		28SI	12	160	Pad
VOLVO - TRUCK	25109511	8600308		28SI	12	160	J180 Long Hinge
VOLVO - TRUCK	2MJ559AM	8600127		36SI	12	170	Pad
VOLVO - TRUCK	3948718	8600308		28SI	12	160	J180 Long Hinge
VOLVO - TRUCK	3948721	8600310		24SI	12	160	J180 Hinge
VOLVO - TRUCK	3948722	8600310		24SI	12	160	J180 Hinge
VOLVO - TRUCK	LN 4890JB	8600634		40SI	12	320	J180 Long Hinge
VOLVO - TRUCK	LN BLP2303GH	8600066		35SI	12	140	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
POWERLINE	32-1	8600314		28SI	12	200	Pad
POWERLINE	32-5	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
POWERLINE	32-6	8600280		40SI	12	275	J180 Long Hinge
POWERLINE	25-26	8600308		28SI	12	160	J180 Long Hinge
POWERLINE	25-30	8600310		24SI	12	160	J180 Hinge
POWERLINE	25-43	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
POWERLINE	25-44	8600390		40SI	12	240	J180 Long Hinge
POWERLINE	25-61	8600280		40SI	12	275	J180 Long Hinge
POWERLINE	25-62	8600280		40SI	12	275	J180 Long Hinge
POWERLINE	25-65	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LESTER	8618-6	93090		REFRIGERATION/AUX	12	65	0
Competitive Brand	01-08218	8600314		28SI	12	200	Pad
LEECE NEVILLE	110-255	8600310		24SI	12	160	J180 Hinge
PRESTOLITE/AUTOLITE	110-273	93073		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-379	93073		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-383	93073		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-385	93073		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-399	93088		REFRIGERATION/AUX	12	65	0
LEECE NEVILLE	110-444	19020310		22SI	12	150	J180 Hinge
PRESTOLITE	110-444	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110-450	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-459	8600468		28SI	24	110	J180 Long Hinge
PRESTOLITE/AUTOLITE	110-487	93073		REFRIGERATION/AUX	12	65	0
LEECE NEVILLE	110-559	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-565	8600889		24SI	12	160	Pad
LEECE NEVILLE	110-566	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-573	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-579	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-580	8600310		24SI	12	160	J180 Hinge
PRESTOLITE/AUTOLITE	110-581	93081		REFRIGERATION/AUX	12	23	0

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	110-583	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	110-584	8600310		24SI	12	160	J180 Hinge
PRESTOLITE/AUTOLITE	110-606	93074		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-607	93074		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-608	93091		REFRIGERATION/AUX	12	105	0
PRESTOLITE/AUTOLITE	110-609	93074		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-633	93088		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-634	93102		REFRIGERATION/AUX	12	105	0
PRESTOLITE/AUTOLITE	110-638	93083		REFRIGERATION/AUX	12	90	0
PRESTOLITE/AUTOLITE	110-643	93091		REFRIGERATION/AUX	12	105	0
PRESTOLITE/AUTOLITE	110-646	93090		REFRIGERATION/AUX	12	65	0
PRESTOLITE/AUTOLITE	110-699	93087		REFRIGERATION/AUX	12	37	0
LEECE NEVILLE	110-775	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	110-777	8600889		24SI	12	160	Pad
LEECE NEVILLE	110-800	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	110-801	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	110-802	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	110-803	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	110-804	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	110-810	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-811	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-812	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-813	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-814	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-815	8600127		36SI	12	170	Pad
LEECE NEVILLE	110-816	8600668		40SI	24	160	Pad
LEECE NEVILLE	110-900	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	110-902	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	110-912	8600889		24SI	12	160	Pad
LEECE NEVILLE	110-916	8600889		24SI	12	160	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WAI	20-117-1	1117641	10459020	20SI	12	60	J180 Hinge
WAI	20-118-1	1117619/ 1117645/1117647	11576974	20SI	24	50/45/35	J180 Hinge
WAI	20-119-1		10459077	26SI	12	75	J180 Hinge
WAI	20-121-1	19010001	10459064	26SI	24	50	J180 Hinge
WAI	20-131-1		10459008	30SI	12	105	J180 Hinge
WAI	20-132-1	1117805/1117821	10459057	30SI	24	75/80	J180 Hinge
WAI	20-178-1		10459076	26SI	24	75	J180 Hinge
LESTER PIC #	240-754		10459196	33SI	24	100	J180 Hinge
LESTER PIC #	240-825	1117805		30SI	24	75	J180 Hinge
LESTER PIC #	240-868	1117915		21SI	24	70	J180 Hinge
AC DELCO	321-645		1117746	30SI	24	60	J180 Hinge
AC DELCO	321-646	1117733		30SI	32	60	J180 Hinge
AC DELCO	321-660	1117647	11576974	20SI	24	35	J180 Hinge
AC DELCO	321-665		10459319	20SI	24	45	J180 Hinge
AC DELCO	321-666	1117641	10459020	20SI	12	60	J180 Hinge
AC DELCO	321-670		10459008	30SI	12	105	J180 Hinge
AC DELCO	321-671	1117805	10459057	30SI	24	75	J180 Hinge
AC DELCO	321-687	1117965/19010166		21SI	12	130/115	J180 Hinge
AC DELCO	321-697	19010000/19010002		26SI	24	75	J180 Hinge
AC DELCO	321-698	19010001		26SI	24	50	J180 Hinge
AC DELCO	321-702		10459077	26SI	12	75	J180 Hinge
AC DELCO	321-707		10459066	26SI	12	85	J180 Hinge
AC DELCO	321-710	1117817	10459120	30SI	24	100	J180 Hinge
AC DELCO	321-748	19011153	10459196	33SI	24	100	J180 Hinge
AC DELCO	321-749	19020310		22SI	12	150	J180 Hinge
AC DELCO	321-756	19010200		21SI	24	70	J180 Hinge
AC DELCO	321-835		10459076	26SI	24	75	J180 Hinge
AC DELCO	321-836		10459064	26SI	24	50	J180 Hinge
AC DELCO	321-837		10459065	26SI	12	85	J180 Hinge
WAI	20-1163-1		10459008	30SI	12	105	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DENSO	211-8000	93098		REFRIGERATION/AUX	12	60	0
DENSO	211-9200	8600889		24SI	12	160	Pad
DENSO	211-9201	8600316		28SI	12	180	Pad
DENSO	211-9202	8600314		28SI	12	200	Pad
DENSO	211-9203	8600314		28SI	12	200	Pad
DENSO	211-9210	8600889		24SI	12	160	Pad
DENSO	211-9211	8600316		28SI	12	180	Pad
DENSO	211-9212	8600314		28SI	12	200	Pad
DENSO	211-9213	8600314		28SI	12	200	Pad
DENSO	212-0110	8600315/8600316		28SI	12	160/180	Pad
LESTER PIC #	240-4054		10459199	34SI	24	100	Quad
LESTER PIC #	240-4118	8600125		36SI	12	170	Quad
LESTER PIC #	240-6312	19020614		7SI	12	70	Spool
LESTER	240-6315	19020614/19020616		7SI	12	70	Spool
Competitive Brand	07-03-1168	8600369		36SI	24	105	J180 Hinge
DIXIE	100-07121	93105		REFRIGERATION/AUX	12	70	0
DIXIE	101-22106	19020310		22SI	12	150	J180 Hinge
DIXIE	101-22109	19020889		22SI	12	150	Pad
DIXIE	101-24107	8600143		24SI	12	160	Pad
DIXIE	101-24108	8600310		24SI	12	160	J180 Hinge
DIXIE	101-24109	8600889		24SI	12	160	Pad
DIXIE	101-35112	8600064		35SI	12	140	J180 Hinge
DIXIE	101-35114	8600066		35SI	12	140	Pad
DIXIE	109-12104	93087		REFRIGERATION/AUX	12	37	0
DIXIE	109-12105	93088		REFRIGERATION/AUX	12	65	0
DIXIE	109-12108	93081		REFRIGERATION/AUX	12	23	0
DIXIE	109-12110	93083		REFRIGERATION/AUX	12	90	0
DIXIE	109-12112	93074		REFRIGERATION/AUX	12	65	0
DIXIE	109-12115	93090		REFRIGERATION/AUX	12	65	0
DIXIE	109-12116	93091		REFRIGERATION/AUX	12	105	0

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DIXIE	109-12118	93073		REFRIGERATION/AUX	12	65	0
DIXIE	109-12145	93102		REFRIGERATION/AUX	12	105	0
DIXIE	109-16105	8600310		24SI	12	160	J180 Hinge
DIXIE	109-16128	8600889		24SI	12	160	Pad
DIXIE	146-06131	93097		REFRIGERATION/AUX	12	60	0
DIXIE	146-06132	93098		REFRIGERATION/AUX	12	60	0
DIXIE	146-93101	93099		REFRIGERATION/AUX	12	40	0
DIXIE	146-93104	93096		REFRIGERATION/AUX	12	40	0
DIXIE	160-84103	93070		REFRIGERATION/AUX	12	65	0
DIXIE	160-84104	93070		REFRIGERATION/AUX	12	65	0
DIXIE	160-84106	93082		REFRIGERATION/AUX	12	120	0
DIXIE	160-84113	93095		REFRIGERATION/AUX	12	65	0
DIXIE	160-84116	93094		REFRIGERATION/AUX	12	120	0
DIXIE	167-84104	61013382		REFRIGERATION/AUX	12	37	0
DIXIE	167-84105	61013383		REFRIGERATION/AUX	12	65A	0
DIXIE	167-84118	61013384		REFRIGERATION/AUX	12	120	0
DIXIE	170-13102	93076		REFRIGERATION/AUX	12	70	0
DIXIE	170-13103	93076		REFRIGERATION/AUX	12	70	0
J & N ELECTRIC	400-12161	8600315		28SI	12	160	Pad
J & N ELECTRIC	400-16016	8600310		24SI	12	160	J180 Hinge
J & N ELECTRIC	400-16017	8600889		24SI	12	160	Pad
J & N ELECTRIC	400-16018	8600307		28SI	12	200	J180 Long Hinge
J & N ELECTRIC	400-24068	8600314		28SI	12	200	Pad
J & N ELECTRIC	400-24069	8600313		28SI	12	200	J180 Short Hinge
LEECE NEVILLE	4800-4900	8600338/ 8600339/8600390		40SI	12	240	Pad/J180 Short Hinge/ J180 Long Hinge
WILSON	70-01-8466	19020608		7SI	12	70	Spool
WILSON	70-01-8467	19020608		7SI	12	70	Spool
WILSON	90-01-3030		10459064	26SI	24	50	J180 Hinge
WILSON	90-01-3098	1117733		30SI	32	60	J180 Hinge
WILSON	90-01-3127	1117641	10459020	20SI	12	60	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-01-3156	1117645	10459319	20SI	24	45	J180 Hinge
WILSON	90-01-3157	1117619/1117647	10459319	20SI	12	50/35	J180 Hinge
WILSON	90-01-4058	8600064		35SI	12	140	J180 Hinge
WILSON	90-01-4072	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4073	19010108		21SI	24	50	J180 Hinge
WILSON	90-01-4074	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4093	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4105	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4109	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4111	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4154	1117805/1117817	20918177	30SI	24	75/100	J180 Hinge
WILSON	90-01-4171	19010001	10459064	26SI	24	50	J180 Hinge
WILSON	90-01-4172	19010002	10459076	26SI	24	75	J180 Hinge
WILSON	90-01-4173		10459065/10459077	26SI	12	85/75	J180 Hinge
WILSON	90-01-4174		10459065	26SI	12	85	J180 Hinge
WILSON	90-01-4185	1117915		21SI	24	70	J180 Hinge
WILSON	90-01-4261	8600064		35SI	12	140	J180 Hinge
WILSON	90-01-4270	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4295	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4296	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4297	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4298	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
WILSON	90-01-4299	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
WILSON	90-01-4323	19011153	10459196	33SI	24	100	J180 Hinge
WILSON	90-01-4324		10459199	34SI	24	100	Quad
WILSON	90-01-4326	8600310		24SI	12	160	J180 Hinge
WILSON	90-01-4327	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4344	8600066		35SI	12	140	Pad
WILSON	90-01-4391	8600066		35SI	12	140	Pad
WILSON	90-01-4393	19020889		22SI	12	150	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-01-4394	8600310		24SI	12	160	J180 Hinge
WILSON	90-01-4397	8600388		24SI	24	70	J180 Hinge
WILSON	90-01-4406	19020614/19020616		7SI	12	70	Spool
WILSON	90-01-4408	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4421	8600310		24SI	12	160	J180 Hinge
WILSON	90-01-4447	8600889		24SI	12	160	Pad
WILSON	90-01-4450	8600143		24SI	12	160	Pad
WILSON	90-01-4459	8600066		35SI	12	140	Pad
WILSON	90-01-4465	19020903		24SI	12	130	J180 Hinge
WILSON	90-01-4466	8600471		21SI	24	70	Pad
WILSON	90-01-4467	8600142		24SI	12	160	J180 Hinge
WILSON	90-01-4468	8600066		35SI	12	140	Pad
WILSON	90-01-4473	8600066		35SI	12	140	Pad
WILSON	90-01-4474	8600066		35SI	12	140	Pad
WILSON	90-01-4495	8600066		35SI	12	140	Pad
WILSON	90-01-4502	8600127		36SI	12	170	Pad
WILSON	90-01-4511	8600126		36SI	12	170	J180 Hinge
WILSON	90-01-4512	8600125		36SI	12	170	Quad
WILSON	90-01-4513	8600066		35SI	12	140	Pad
WILSON	90-01-4514	8600125		36SI	12	170	Quad
WILSON	90-01-4515	8600126		36SI	12	170	J180 Hinge
WILSON	90-01-4533	19020208		11SI	12	95	Spool
WILSON	90-01-4535	8600030		11SI	12	95	Spool
WILSON	90-01-4569	8600143		24SI	12	160	Pad
WILSON	90-01-4576	8600310		24SI	12	160	J180 Hinge
WILSON	90-01-4577	8600889		24SI	12	160	Pad
WILSON	90-01-4721	8600223		28SI	12	180	J180 Short Hinge
WILSON	90-01-4723	8600314		28SI	12	200	Pad
WILSON	90-01-4724	8600313		28SI	12	200	J180 Short Hinge
WILSON	90-01-4742	8600253		28SI	12	200	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-01-7100	8600307		28SI	12	200	J180 Long Hinge
WILSON	90-04-7020		10459077	26SI	12	75	J180 Hinge
WILSON	90-04-7039	8600310		24SI	12	160	J180 Hinge
WILSON	90-04-7040	19020310		22SI	12	150	J180 Hinge
WILSON	90-04-7056	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7057	8600390		40SI	12	240	J180 Long Hinge
WILSON	90-04-7058	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7059	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7062	8600280		40SI	12	275	J180 Long Hinge
WILSON	90-04-7064	8600280		40SI	12	275	J180 Long Hinge
WILSON	90-04-7073	8600064		35SI	12	140	J180 Hinge
WILSON	90-04-7076	8600310		24SI	12	160	J180 Hinge
WILSON	90-04-7082	19020310		22SI	12	150	J180 Hinge
WILSON	90-04-7084	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
WILSON	90-04-7085	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-04-7087	8600311		28SI	12	180	J180 Long Hinge
WILSON	90-04-7097	8600094		40SI	12	275	Pad
WILSON	90-04-7098	8600338/8600707		40SI/38SI	12	240/215	Pad
WILSON	90-04-7100	8600307		28SI	12	200	J180 Long Hinge
WILSON	90-04-7105	8600094		40SI	12	275	Pad
WILSON	90-04-7107	8600628		40SI	12	320	Pad
WILSON	90-05-9028	93073		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9124	8600310		24SI	12	160	J180 Hinge
WILSON	90-05-9135	93088		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9147	93073		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9148	93087/93088		REFRIGERATION/AUX	12	37/65	#N/A
WILSON	90-05-9149	93088		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9170	93081		REFRIGERATION/AUX	12	23	0
WILSON	90-05-9195	19020310		22SI	12	150	J180 Hinge
WILSON	90-05-9197	8600310		24SI	12	160	J180 Hinge

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-05-9209	93074		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9210	93090		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9221	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9227	93091		REFRIGERATION/AUX	12	105	0
WILSON	90-05-9234	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9235	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9236	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9241	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-05-9247	8600889		24SI	12	160	Pad
WILSON	90-05-9249	8600127		36SI	12	170	Pad
WILSON	90-05-9250	8600127		36SI	12	170	Pad
WILSON	90-05-9251	8600127		36SI	12	170	Pad
WILSON	90-05-9252	8600127		36SI	12	170	Pad
WILSON	90-05-9253	19020310		22SI	12	150	J180 Hinge
WILSON	90-05-9254	8600889		24SI	12	160	Pad
WILSON	90-05-9260	93081		REFRIGERATION/AUX	12	23	0
WILSON	90-05-9268	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-05-9270	93083		REFRIGERATION/AUX	12	90	0
WILSON	90-05-9280	8600889		24SI	12	160	Pad
WILSON	90-05-9295	8600889		24SI	12	160	Pad
WILSON	90-05-9296	19020889		22SI	12	150	Pad
WILSON	90-05-9304	8600310		24SI	12	160	J180 Hinge
WILSON	90-15-6233	61013382		REFRIGERATION/AUX	12	37	0
WILSON	90-15-6280	93070		REFRIGERATION/AUX	12	65	0
WILSON	90-15-6384	93082		REFRIGERATION/AUX	12	120	0
WILSON	90-15-6424	8600310		24SI	12	160	J180 Hinge
WILSON	90-15-6569	8600889		24SI	12	160	Pad
WILSON	90-15-6570	8600313		28SI	12	200	J180 Short Hinge
WILSON	90-15-6571	8600314		28SI	12	200	Pad
WILSON	90-20-3560	93076		REFRIGERATION/AUX	12	70	0

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-20-3561	93076		REFRIGERATION/AUX	12	70	0
WILSON	90-20-3574	93076		REFRIGERATION/AUX	12	70	0
WILSON	90-29-5429	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5430	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5436	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5563	8600469		28SI	24	110	Pad
WILSON	91-04-7105	8600094		40SI	12	275	Pad
DENSO	101211-840	8600469		28SI	24	110	Pad
DENSO	10121-8050	8600126		36SI	12	170	J180 Hinge
BOSCH	0-120-484-028	93082		REFRIGERATION/AUX	12	120	0
BOSCH	0-120-484-049	93082		REFRIGERATION/AUX	12	120	0
BOSCH	0-120-488-296	93070		REFRIGERATION/AUX	12	65	0
BOSCH	0-120-488-297	61013382		REFRIGERATION/AUX	12	37	0
BOSCH	0-124-515-064	8600658		18SI	12	175	Special
BOSCH	0-124-615-019	8600658		18SI	12	175	Special
BOSCH	0-124-615-033	8600658		18SI	12	175	Special
BOSCH	0-124-625-068	8600314		28SI	12	200	Pad
LEECE NEVILLE	80201-0019		10459077	26SI	12	75	J180 Hinge
DENSO	100211-1680	93099		REFRIGERATION/AUX	12	40	0
DENSO	100211-4740	93096		REFRIGERATION/AUX	12	40	0
DENSO	100211-4741	93096		REFRIGERATION/AUX	12	40	0
DENSO	101210-9011	8600668		40SI	24	160	Pad
DENSO	101211-2950	93098		REFRIGERATION/AUX	12	60	0
DENSO	101211-2951	93098		REFRIGERATION/AUX	12	60	0
DENSO	101211-2960	93097		REFRIGERATION/AUX	12	60	0
DENSO	101211-2961	93097		REFRIGERATION/AUX	12	60	0
DENSO	101211-8010	8600126		36SI	12	170	J180 Hinge
DENSO	101211-8020	8600064		35SI	12	140	J180 Hinge
DENSO	101211-8030	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8050	8600064		35SI	12	140	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DENSO	101211-8060	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8120	8600064/8600126		35SI/36SI	12	140/170	J180 Hinge
DENSO	101211-8130	8600388		24SI	24	70	J180 Hinge
DENSO	101211-8140	8600388		24SI	24	70	J180 Hinge
DENSO	101211-8250	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8290	8600310		24SI	12	160	J180 Hinge
DENSO	101211-8380	8600066		35SI	12	140	Pad
DENSO	101211-8390	8600127/19020889		36SI/22SI	12	170/150	Pad
DENSO	101211-8400	8600469		28SI	24	110	Pad
DENSO	101211-8401	8600469		28SI	24	110	Pad
mitsubishi	101211-8410	8600127/8600889		36SI/24SI	12	170/160	Pad
DENSO	101211-8810	93098		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64011	93097		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64012	93097		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64013	93097		REFRIGERATION/AUX	12	60	0
LEECE NEVILLE	5034-110900	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	51-00179-008	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	600-8218990	19010001		26SI	24	50	J180 Hinge
KUBOTA	66436-64013	93096		REFRIGERATION/AUX	12	40	0
Competitive Brand	6731-82-6130	19020208		11SI	12	95	Spool
BOSCH	9-120-060-023	93070		REFRIGERATION/AUX	12	65	0
BOSCH	9-120-060-027	61013382		REFRIGERATION/AUX	12	37	0
BOSCH	9-120-060-038	93082		REFRIGERATION/AUX	12	120	0
KUBOTA	66436-640152	93096		REFRIGERATION/AUX	12	40	0
LEECE NEVILLE	00091655	8600280		40SI	12	275	J180 Long Hinge
Competitive Brand	000E-051S7	19020617		7SI	12	70	Spool
BOSCH	0124515084	8600310		24SI	12	160	J180 Hinge
BOSCH	0124525109	8600889		24SI	12	160	Pad
BOSCH	0124525164	8600889		24SI	12	160	Pad
BOSCH	0124525168	8600889		24SI	12	160	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
BOSCH	0124555065	19070019		18SI	24	80	Spool
BOSCH	0124625046	8600314/8600707		28SI/38SI	12	200/215	Pad
BOSCH	0124625062	8600315/8600889		28SI/24SI	12	160	Pad
BOSCH	0124625071	8600315		28SI	12	160	Pad
BOSCH	0124655079	8600469		28SI	24	110	Pad
LEECE NEVILLE	10010644	8600314		28SI	12	200	Pad
Competitive Brand	10010645	8600094		40SI	12	275	Pad
Competitive Brand	10010646	8600298		40SI	12	300	Pad
Competitive Brand	10459065RMAN		10459065	26SI	12	85	J180 Hinge
DELCO REMY/REMY	10459119		10459008	30SI	12	105	J180 Hinge
DELCO REMY/REMY	10459321	19020889		22SI	12	150	Pad
Competitive Brand	10503757	1117641		20SI	12	60	J180 Hinge
LEECE NEVILLE	105P55	8600889		24SI	12	160	Pad
LEECE NEVILLE	110-444P	19020889		22SI	12	150	Pad
LEECE NEVILLE	110444PHO	19020889		22SI	12	150	Pad
LEECE NEVILLE	110550JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110555JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110-555JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110555JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110555N	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	110-555P	19020889		22SI	12	150	Pad
LEECE NEVILLE	110-555PH0	19020889		22SI	12	150	Pad
LEECE NEVILLE	110-555PHO	19020889		22SI	12	150	Pad
Competitive Brand	110555PHO-AUT	19020889		22SI	12	150	Pad
LEECE NEVILLE	110-555RM	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	11055JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	11055PH0	19020889		22SI	12	150	Pad
LEECE NEVILLE	11055PHO	19020889		22SI	12	150	Pad
LEECE NEVILLE	110-566P	8600889		24SI	12	160	Pad
LEECE NEVILLE	1105-GG1-001	8600314/8600707		28SI/38SI	12	200/215	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	110-775P	8600316		28SI	12	180	Pad
LEECE NEVILLE	110-775V	8600316		28SI	12	180	Pad
LEECE NEVILLE	1110444P	8600889		24SI	12	160	Pad
LEECE NEVILLE	1110-555JH0	19020310		22SI	12	150	J180 Hinge
Competitive Brand	1114259		10459008	30SI	12	105	J180 Hinge
LEECE NEVILLE	111-555PHO	19020889		22SI	12	150	Pad
LESTER	11306	8600763		18SI	12	175	Special
WAI	1-1918-00DR	19010166		21SI	12	115	J180 Hinge
WAI	1-2044-00DR-1	19020310		22SI	12	150	J180 Hinge
WAI	1-2154-00DR	19020312		22SI	12	100	J180 Hinge
BBB REMAN	12224	93070		REFRIGERATION/AUX	12	65	0
LESTER	12224	93070		REFRIGERATION/AUX	12	65	0
WAI	1-2280-00DR	19020310		22SI	12	150	J180 Hinge
WAI	1-2291-00DR	19010108/ 19010111/19010182		21SI	24	50/70/70	J180 Hinge
WAI	1-2292-00DR	1117915		21SI	24	70	J180 Hinge
WAI	1-2300-00DR	1117965		21SI	12	130	J180 Hinge
WAI	1-2301-00DR		10459065	26SI	12	85	J180 Hinge
LESTER	12334	93082		REFRIGERATION/AUX	12	120	0
WAI-WPS NEW	12334N	93082		REFRIGERATION/AUX	12	120	0
LESTER	12352	93097		REFRIGERATION/AUX	12	60	0
WAI	1-2428-00DR-3	19020889		22SI	12	150	Pad
LESTER	12459	93076		REFRIGERATION/AUX	12	70	0
WAI-WPS NEW	12459N	93076		REFRIGERATION/AUX	12	70	0
BOSCH	124625043	8600314/ 8600316/8600707		28SI/28SI/38SI	12	200/180/215	Pad
BOSCH	124625048	8600314/ 8600315/8600707		28SI/28SI/38SI	12	200/160/215	Pad
BOSCH	124625051	8600314/ 8600316/8600707		28SI/28SI/38SI	12	200/180/215	Pad
BOSCH	124625098	8600314		28SI	12	200	Pad
WAI	1-2488-01DR	19020614		7SI	12	70	Spool
WAI	1-2558-00DR-1	19011153	10459196	33SI	24	100	J180 Hinge
WAI	1-2561-00DR	8600065		35SI	12	140	Quad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WAI	1-2562-00DR	8600066		22SI	12	100	J180 Hinge
WAI	1-2563-00DR	8600064		21SI	24	70	J180 Hinge
WAI	1-2570-00DR	19020900		30SI	32	60	J180 Hinge
WAI-WPS NEW	12614N	93082		REFRIGERATION/AUX	12	70	Single Spool
WAI	1-2680-00DR			REFRIGERATION/AUX	12	70	Single Spool
WAI	1-2682-00DR	8600125		REFRIGERATION/AUX	12	70	Single Spool
LESTER	12770	8600469		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1283870H91	1117821		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1283871H91	1117817		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1286822H91	1117619		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1310137H91	19010108		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1316534H91	19011153		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1367338	19010108		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1439159H91			REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	1469598	19020616		REFRIGERATION/AUX	12	100	Single Spool
Competitive Brand	1469599	19020614		REFRIGERATION/AUX	12	70	Single Spool
LEECE NEVILLE	14923PAH	8600314		REFRIGERATION/AUX	12	100	Single Spool
LEECE NEVILLE	14931PAH	8600628		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	15301193	19011153		REFRIGERATION/AUX	12	100	Single Spool
Competitive Brand	1534017	19020609		REFRIGERATION/AUX	12	100	Single Spool
LEECE NEVILLE	1831227	8600094		REFRIGERATION/AUX	12	100	Single Spool
DENSO	1855294	8600388		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	19011153P	19011153		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020507	61013382		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020508	93070		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020512	93088		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020514	93074		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020515	93087		REFRIGERATION/AUX	12	70	Single Spool
DELCO REMY/REMY	19020519	93074		REFRIGERATION/AUX	12	100	Single Spool
DELCO REMY/REMY	19020520	93073		REFRIGERATION/AUX	12	100	Single Spool

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
REMY POWER PRODUCTS	20267	61013123		REFRIGERATION/AUX	12	100	Single Spool
REMY POWER PRODUCTS	20268	61013123		REFRIGERATION/AUX	12	100	Single Spool
WORLD WIDE	20268	61013123		REFRIGERATION/AUX	12	100	Single Spool
REMY POWER PRODUCTS	20269	61013123		REFRIGERATION/AUX	12	100	Single Spool
DENSO	20583883	8600127/8600889		36SI/24SI	12	170/160	Pad
Competitive Brand	2074390	19020617		7SI	12	70	Spool
Competitive Brand	2074999	8600298		40SI	12	300	Pad
REMY POWER PRODUCTS	21015	61013123		REFRIGERATION/AUX	12	100	Single Spool
Competitive Brand	21069742	8600247		35SI	12	135	Pad
Competitive Brand	21286172	8600402		24SI	12	100	Pad
Competitive Brand	21286181	8600404		24SI	12	145	Pad
Competitive Brand	21439834	8600338		40SI	12	240	Pad
LEECE NEVILLE	21497612	8600628		40SI	12	320	Pad
mitsubishi	22209658	8600314/ 8600315/8600889		28SI/28SI/24SI	12	200/160/160	Pad
LEECE NEVILLE	2302JB	1117733		30SI	32	60	J180 Hinge
LEECE NEVILLE	2303H	8600066		35SI	12	140	Pad
LEECE NEVILLE	2331GH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	2333GH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	2360JB		10459077	26SI	12	75	J180 Hinge
LEECE NEVILLE	2360JC		10459077	26SI	12	75	J180 Hinge
mitsubishi	23800524	8600314/8600338		28SI/40SI	12	200/240	Pad
Competitive Brand	23B06A1300	19011153		33SI	24	100	J180 Hinge
LESTER PIC #	240-4093B	8600064		35SI	12	140	J180 Hinge
LESTER PIC #	240-4093C	8600064		35SI	12	140	J180 Hinge
LESTER PIC #	240-4099C	8600065		35SI	12	140	Quad
LESTER PIC #	240-4103C	8600066		35SI	12	140	Pad
LESTER PIC #	240-825A	1117805		30SI	24	75	J180 Hinge
LEECE NEVILLE	2500JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2500LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	25026597	8600094		40SI	12	275	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	2505LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2513LC	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	25180228	19020889		22SI	12	150	Pad
VALEO	2542795	93105		REFRIGERATION/AUX	12	70	0
VALEO	2542989C	8600763		18SI	12	175	Special
LEECE NEVILLE	2600JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2670LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2671LC	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	2680LCF	8600064		35SI	12	140	J180 Hinge
LEECE NEVILLE	2706LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2713LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2800jb	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2800LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2800LCR	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2800LCRM	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2801LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	2802LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	2805JB	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	2805LC	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	2808LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2813LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2819LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2824JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2824LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	2825LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	2828LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
Competitive Brand	28F-1084-011	8600094		40SI	12	275	Pad
LEECE NEVILLE	2913LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	2913LCRM	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	2MJ4135BM	8600310		24SI	12	160	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
Competitive Brand	2MJ4135BM2	8600310		24SI	12	160	J180 Hinge
Competitive Brand	2MJ4139M	19020396		22SI	12	100	J180 Hinge
LEECE NEVILLE	2MJ518	8600126		36SI	12	170	J180 Hinge
Competitive Brand	3134785		10459020	20SI	12	60	J180 Hinge
Competitive Brand	3135203		10459065	26SI	12	85	J180 Hinge
Competitive Brand	3135204		10459066	26SI	12	85	J180 Hinge
Competitive Brand	3338718	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	33-9141RM	8600064		35SI	12	140	J180 Hinge
LEECE NEVILLE	33-9142RM	8600094		40SI	12	275	Pad
Competitive Brand	3539575	8600043		24SI	12	160	Pad
LEECE NEVILLE	3564536P91	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	3574550C92	19020310		22SI	12	150	J180 Hinge
Competitive Brand	3578761	8600016		24SI	24	70	Pad
LEECE NEVILLE	3579009	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	3579009C91	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	3579009C92	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	3579009C93	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	3587959	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	3587959C91	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	3587959C92	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	3591557	8600315		28SI	12	160	Pad
LEECE NEVILLE	3591557C91	8600315		28SI	12	160	Pad
LEECE NEVILLE	3591557C92	8600315		28SI	12	160	Pad
Competitive Brand	3603854	19011164		33SI	12	110	J180 Hinge
Competitive Brand	3604685		1117746	30SI	24	60	J180 Hinge
BOSCH	3667812C91	8600315		28SI	12	160	Pad
Competitive Brand	3675104		10459120	30SI	24	100	J180 Hinge
Competitive Brand	3675126		1117655	20SI	24	35	J180 Hinge
Competitive Brand	3675235		10459196	33SI	24	100	J180 Hinge
LEECE NEVILLE	3701568	8600889		24SI	12	160	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	3701568C91	8600889		24SI	12	160	Pad
LEECE NEVILLE	3701568C92	8600889		24SI	12	160	Pad
Competitive Brand	3702483	8600017		24SI	24	70	J180 Hinge
LEECE NEVILLE	3711092C93	8600338		40SI	12	240	Pad
LEECE NEVILLE	3711093	8600628		40SI	12	320	Pad
LEECE NEVILLE	3711093C91	8600628		40SI	12	320	Pad
LEECE NEVILLE	3711093C92	8600628		40SI	12	320	Pad
MITSUBISHI	3788471C91	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	3813037	8600127/8600338		36SI/40SI	12	170/240	Pad
LEECE NEVILLE	3813037C91	8600127/8600338		36SI/40SI	12	170/240	Pad
LEECE NEVILLE	3863006	8600338		40SI	12	240	Pad
LEECE NEVILLE	3863006C91	8600338		40SI	12	240	Pad
LEECE NEVILLE	3863006C92	8600338/8600707		40SI/38SI	12	240/215	Pad
LEECE NEVILLE	3863007C91	8600316		28SI	12	180	Pad
Competitive Brand	39020310P	19020310		22SI	12	150	J180 Hinge
Competitive Brand	3915517		10459077	26SI	12	75	J180 Hinge
Competitive Brand	3915518		10459064	26SI	24	50	J180 Hinge
Competitive Brand	3915519		10459076	26SI	24	75	J180 Hinge
Competitive Brand	3947578	19020310		22SI	12	150	J180 Hinge
JANNCO	400-12220R	8600315		28SI	12	160	Pad
JANNCO	400-16011R	8600280		40SI	12	275	J180 Long Hinge
JANNCO	400-16013R	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
JANNCO	400-16015R	8600127		36SI	12	170	Pad
JANNCO	400-16018R	8600307		28SI	12	200	J180 Long Hinge
JANNCO	400-52048R	8600126		36SI	12	170	J180 Hinge
Competitive Brand	402001	19020616		7SI	12	70	Spool
Competitive Brand	4020031	19010166		21SI	12	115	J180 Hinge
LEECE NEVILLE	4022170	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	4022170C	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	4022170C91	8600314/8600707		28SI/38SI	12	200/215	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	4022170C92	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	4022171	8600338		40SI	12	240	Pad
LEECE NEVILLE	4022171C	8600338		40SI	12	240	Pad
LEECE NEVILLE	4022171C91	8600338		40SI	12	240	Pad
LEECE NEVILLE	4022171C92	8600338		40SI	12	240	Pad
Competitive Brand	4047006	19010166		21SI	12	115	J180 Hinge
LEECE NEVILLE	4060248	8600628		40SI	12	320	Pad
LEECE NEVILLE	4060248C	8600628		40SI	12	320	Pad
LEECE NEVILLE	4060248C91	8600628		40SI	12	320	Pad
LEECE NEVILLE	4060248C92	8600628		40SI	12	320	Pad
MITSUBISHI	4085411C91	8600127		36SI	12	170	Pad
Competitive Brand	42610459008		10459008	30SI	12	105	J180 Hinge
Competitive Brand	42610459065		10459065	26SI	12	85	J180 Hinge
Competitive Brand	42619020310	19020310		22SI	12	150	J180 Hinge
Competitive Brand	4268600143	8600143		24SI	12	160	Pad
VALEO	439186	93076		REFRIGERATION/AUX	12	70	0
LEECE NEVILLE	4725AA	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	475702	19020616		7SI	12	70	Spool
Competitive Brand	475738	19020617		7SI	12	70	Spool
LEECE NEVILLE	4832LCH	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	4833LC	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4833LGH	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
LEECE NEVILLE	4836AAH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4836LGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4836LGHRM	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4846AAH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4850AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4852AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	4854AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	4856AA	8600280		40SI	12	275	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-01-7100	8600307		28SI	12	200	J180 Long Hinge
WILSON	90-04-7020		10459077	26SI	12	75	J180 Hinge
WILSON	90-04-7039	8600310		24SI	12	160	J180 Hinge
WILSON	90-04-7040	19020310		22SI	12	150	J180 Hinge
WILSON	90-04-7056	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7057	8600390		40SI	12	240	J180 Long Hinge
WILSON	90-04-7058	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7059	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
WILSON	90-04-7062	8600280		40SI	12	275	J180 Long Hinge
WILSON	90-04-7064	8600280		40SI	12	275	J180 Long Hinge
WILSON	90-04-7073	8600064		35SI	12	140	J180 Hinge
WILSON	90-04-7076	8600310		24SI	12	160	J180 Hinge
WILSON	90-04-7082	19020310		22SI	12	150	J180 Hinge
WILSON	90-04-7084	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
WILSON	90-04-7085	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-04-7087	8600311		28SI	12	180	J180 Long Hinge
WILSON	90-04-7097	8600094		40SI	12	275	Pad
WILSON	90-04-7098	8600338/8600707		40SI/38SI	12	240/215	Pad
WILSON	90-04-7100	8600307		28SI	12	200	J180 Long Hinge
WILSON	90-04-7105	8600094		40SI	12	275	Pad
WILSON	90-04-7107	8600628		40SI	12	320	Pad
WILSON	90-05-9028	93073		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9124	8600310		24SI	12	160	J180 Hinge
WILSON	90-05-9135	93088		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9147	93073		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9148	93087/93088		REFRIGERATION/AUX	12	37/65	#N/A
WILSON	90-05-9149	93088		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9170	93081		REFRIGERATION/AUX	12	23	0
WILSON	90-05-9195	19020310		22SI	12	150	J180 Hinge
WILSON	90-05-9197	8600310		24SI	12	160	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-05-9209	93074		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9210	93090		REFRIGERATION/AUX	12	65	0
WILSON	90-05-9221	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9227	93091		REFRIGERATION/AUX	12	105	0
WILSON	90-05-9234	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9235	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9236	8600126		36SI	12	170	J180 Hinge
WILSON	90-05-9241	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-05-9247	8600889		24SI	12	160	Pad
WILSON	90-05-9249	8600127		36SI	12	170	Pad
WILSON	90-05-9250	8600127		36SI	12	170	Pad
WILSON	90-05-9251	8600127		36SI	12	170	Pad
WILSON	90-05-9252	8600127		36SI	12	170	Pad
WILSON	90-05-9253	19020310		22SI	12	150	J180 Hinge
WILSON	90-05-9254	8600889		24SI	12	160	Pad
WILSON	90-05-9260	93081		REFRIGERATION/AUX	12	23	0
WILSON	90-05-9268	8600308		28SI	12	160	J180 Long Hinge
WILSON	90-05-9270	93083		REFRIGERATION/AUX	12	90	0
WILSON	90-05-9280	8600889		24SI	12	160	Pad
WILSON	90-05-9295	8600889		24SI	12	160	Pad
WILSON	90-05-9296	19020889		22SI	12	150	Pad
WILSON	90-05-9304	8600310		24SI	12	160	J180 Hinge
WILSON	90-15-6233	61013382		REFRIGERATION/AUX	12	37	0
WILSON	90-15-6280	93070		REFRIGERATION/AUX	12	65	0
WILSON	90-15-6384	93082		REFRIGERATION/AUX	12	120	0
WILSON	90-15-6424	8600310		24SI	12	160	J180 Hinge
WILSON	90-15-6569	8600889		24SI	12	160	Pad
WILSON	90-15-6570	8600313		28SI	12	200	J180 Short Hinge
WILSON	90-15-6571	8600314		28SI	12	200	Pad
WILSON	90-20-3560	93076		REFRIGERATION/AUX	12	70	0

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90-20-3561	93076		REFRIGERATION/AUX	12	70	0
WILSON	90-20-3574	93076		REFRIGERATION/AUX	12	70	0
WILSON	90-29-5429	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5430	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5436	8600126		36SI	12	170	J180 Hinge
WILSON	90-29-5563	8600469		28SI	24	110	Pad
WILSON	91-04-7105	8600094		40SI	12	275	Pad
DENSO	101211-840	8600469		28SI	24	110	Pad
DENSO	10121-8050	8600126		36SI	12	170	J180 Hinge
BOSCH	0-120-484-028	93082		REFRIGERATION/AUX	12	120	0
BOSCH	0-120-484-049	93082		REFRIGERATION/AUX	12	120	0
BOSCH	0-120-488-296	93070		REFRIGERATION/AUX	12	65	0
BOSCH	0-120-488-297	61013382		REFRIGERATION/AUX	12	37	0
BOSCH	0-124-515-064	8600658		18SI	12	175	Special
BOSCH	0-124-615-019	8600658		18SI	12	175	Special
BOSCH	0-124-615-033	8600658		18SI	12	175	Special
BOSCH	0-124-625-068	8600314		28SI	12	200	Pad
LEECE NEVILLE	80201-0019		10459077	26SI	12	75	J180 Hinge
DENSO	100211-1680	93099		REFRIGERATION/AUX	12	40	0
DENSO	100211-4740	93096		REFRIGERATION/AUX	12	40	0
DENSO	100211-4741	93096		REFRIGERATION/AUX	12	40	0
DENSO	101210-9011	8600668		40SI	24	160	Pad
DENSO	101211-2950	93098		REFRIGERATION/AUX	12	60	0
DENSO	101211-2951	93098		REFRIGERATION/AUX	12	60	0
DENSO	101211-2960	93097		REFRIGERATION/AUX	12	60	0
DENSO	101211-2961	93097		REFRIGERATION/AUX	12	60	0
DENSO	101211-8010	8600126		36SI	12	170	J180 Hinge
DENSO	101211-8020	8600064		35SI	12	140	J180 Hinge
DENSO	101211-8030	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8050	8600064		35SI	12	140	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DENSO	101211-8060	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8120	8600064/8600126		35SI/36SI	12	140/170	J180 Hinge
DENSO	101211-8130	8600388		24SI	24	70	J180 Hinge
DENSO	101211-8140	8600388		24SI	24	70	J180 Hinge
DENSO	101211-8250	19020310		22SI	12	150	J180 Hinge
DENSO	101211-8290	8600310		24SI	12	160	J180 Hinge
DENSO	101211-8380	8600066		35SI	12	140	Pad
DENSO	101211-8390	8600127/19020889		36SI/22SI	12	170/150	Pad
DENSO	101211-8400	8600469		28SI	24	110	Pad
DENSO	101211-8401	8600469		28SI	24	110	Pad
mitsubishi	101211-8410	8600127/8600889		36SI/24SI	12	170/160	Pad
DENSO	101211-8810	93098		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64011	93097		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64012	93097		REFRIGERATION/AUX	12	60	0
KUBOTA	19630-64013	93097		REFRIGERATION/AUX	12	60	0
LEECE NEVILLE	5034-110900	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	51-00179-008	8600308		28SI	12	160	J180 Long Hinge
Competitive Brand	600-8218990	19010001		26SI	24	50	J180 Hinge
KUBOTA	66436-64013	93096		REFRIGERATION/AUX	12	40	0
Competitive Brand	6731-82-6130	19020208		11SI	12	95	Spool
BOSCH	9-120-060-023	93070		REFRIGERATION/AUX	12	65	0
BOSCH	9-120-060-027	61013382		REFRIGERATION/AUX	12	37	0
BOSCH	9-120-060-038	93082		REFRIGERATION/AUX	12	120	0
KUBOTA	66436-640152	93096		REFRIGERATION/AUX	12	40	0
LEECE NEVILLE	00091655	8600280		40SI	12	275	J180 Long Hinge
Competitive Brand	000E-051S7	19020617		7SI	12	70	Spool
BOSCH	0124515084	8600310		24SI	12	160	J180 Hinge
BOSCH	0124525109	8600889		24SI	12	160	Pad
BOSCH	0124525164	8600889		24SI	12	160	Pad
BOSCH	0124525168	8600889		24SI	12	160	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	4860AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4860JB	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4860JBRM	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	4861JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4863JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4863JBRM	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4864JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4867JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4867JGH	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4868JGH	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4869JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	4870AA	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4870JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4870JBRM	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4871JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4872AA	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4872JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4873JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	4874JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	4884JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4884JBRM	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	4885JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	4887JB	8600390		40SI	12	240	J180 Long Hinge
Competitive Brand	4887X	8600310/19020310		24SI/22SI	12	160/150	J180 Hinge
LEECE NEVILLE	4890AA	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	4890JB	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	4892AA	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	4923PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4939AAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4939PAH	8600314/8600707		28SI/38SI	12	200/215	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	4939PGH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4940PA	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	4942PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4943PGH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4944PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4945AAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4947PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4948PA	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	4949GH	8600094		40SI	12	275	Pad
LEECE NEVILLE	4949PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4949PAH	8600094		40SI	12	275	Pad
LEECE NEVILLE	4949PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	4951PA	8600314		28SI	12	200	Pad
LEECE NEVILLE	4951PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4951PGH	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	4953PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	4958PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	4959PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	4962PA	8600628		40SI	12	320	Pad
LEECE NEVILLE	4962PAH	8600628		40SI	12	320	Pad
LEECE NEVILLE	4966PAA	8600298		40SI	12	300	Pad
LEECE NEVILLE	4967PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	4975PAA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4977AAH	8600338		40SI	12	240	Pad
LEECE NEVILLE	4993PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	4994PA	8600628		40SI	12	320	Pad
LEECE NEVILLE	5034-110555PHO	19020889		22SI	12	150	Pad
LEECE NEVILLE	5034-A160207	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	5034-AVI160P2007	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	5034-AVI555J	8600308/8600311		28SI	12	160/180	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	5034-AV1555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	5034-BLP2334GH	8600316		28SI	12	180	Pad
LEECE NEVILLE	5035050	8600314/8600707		28SI/38SI	12	200/215	Pad
REMY POWER PRODUCTS	51105	61013122		REFRIGERATION/AUX	12	70	Single Spool
REMY POWER PRODUCTS	51106	61013122		REFRIGERATION/AUX	12	70	Single Spool
WORLD WIDE	51219	19020310		22SI	12	150	J180 Hinge
WORLD WIDE	51251		10459077	26SI	12	75	J180 Hinge
LEECE NEVILLE	514089C91	19020310		22SI	12	150	J180 Hinge
Competitive Brand	5241500150	1117817		30SI	24	100	J180 Hinge
WORLD WIDE	53100		10459008	30SI	12	105	J180 Hinge
WORLD WIDE	53105		10459065	26SI	12	85	J180 Hinge
WORLD WIDE	53136		10459319	20SI	24	45	J180 Hinge
WORLD WIDE	53157		10459064	26SI	24	50	J180 Hinge
Competitive Brand	53160		10459057	30SI	24	75	J180 Hinge
REMY POWER PRODUCTS	53165	61013122		REFRIGERATION/AUX	12	70	Single Spool
WORLD WIDE	53165	61013122		REFRIGERATION/AUX	12	70	Single Spool
REMY POWER PRODUCTS	53170	61013122		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	53171		10459065	26SI	12	85	J180 Hinge
AMERICAN POWER SYSTEMS	55I270ACT24	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4800AA	8600307		28SI	12	200	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4834AA	8600307		28SI	12	200	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4834LC	8600307		28SI	12	200	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4835PGH	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	55I4850AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4852AA	8600390		40SI	12	240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4854AA	8600390		40SI	12	240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4860AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4861JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4863JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	55I4867JB	8600280		40SI	12	275	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
AMERICAN POWER SYSTEMS	5514870AA	8600280		40SI	12	275	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514870JB	8600280		40SI	12	275	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514871JB	8600280		40SI	12	275	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514872AA	8600280		40SI	12	275	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514872B	8600280		40SI	12	275	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514884JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514890AA	8600300		40SI	12	300	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514892AA	8600300		40SI	12	300	J180 Long Hinge
AMERICAN POWER SYSTEMS	5514939AAH	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	5514940PA	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	5514943PGH	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	5514945AAH	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	5514948PA	8600314		28SI	12	200	Pad
AMERICAN POWER SYSTEMS	5514951PGH	8600314		28SI	12	200	Pad
Competitive Brand	562326	19010000		26SI	24	75	J180 Hinge
Competitive Brand	575010	19020608		7SI	12	70	Spool
Competitive Brand	575011	19020606		7SI	12	70	Spool
Competitive Brand	575014	8600002		11SI	12	95	Spool
Competitive Brand	63000048	19020617		7SI	12	70	Spool
Competitive Brand	63157		10459064	26SI	24	50	J180 Hinge
PRESTOLITE/AUTOLITE	66021606	93070		REFRIGERATION/AUX	12	65	0
LESTER	7138	19020310		22SI	12	150	J180 Hinge
Competitive Brand	7244700	19020608		7SI	12	70	Spool
Competitive Brand	7245280	19020609		7SI	12	70	J180 Hinge
BBB REMAN	7252		10459076	26SI	24	75	J180 Hinge
LESTER	7254		10459064	26SI	24	50	J180 Hinge
BBB REMAN	7255		10459065/10459077	26SI	12	85/75	J180 Hinge
BBB REMAN	7297		10459319	20SI	24	45	J180 Hinge
LESTER	7297		10459319	20SI	24	45	J180 Hinge
Competitive Brand	73119134	1117645		20SI	24	45	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LESTER	7344	93073		REFRIGERATION/AUX	12	65	0
LESTER	7479	93088		REFRIGERATION/AUX	12	65	0
LESTER	7597	93081		REFRIGERATION/AUX	12	23	0
Competitive Brand	7613N-LC	8600310		24SI	12	160	J180 Hinge
LESTER	7642	19010108		21SI	24	50	J180 Hinge
LESTER	7669	19020310		22SI	12	150	J180 Hinge
LESTER	7672	19020310		22SI	12	150	J180 Hinge
BBB REMAN	7675		10459065	26SI	12	85	J180 Hinge
WAI	7685N	8600310/19020310		24SI/22SI	12	160/150	J180 Hinge
LESTER	7843	19020310		22SI	12	150	J180 Hinge
BBB REMAN	7940		10459008	30SI	12	105	J180 Hinge
WAI	7971N	8600310		24SI	12	160	J180 Hinge
LESTER	7975		10459057	30SI	24	75	J180 Hinge
LESTER	8024	19020310		22SI	12	150	J180 Hinge
LESTER	8027	19020310		22SI	12	150	J180 Hinge
BBB REMAN	8060		10459065	26SI	12	85	J180 Hinge
BBB REMAN	8062		10459076	26SI	24	75	J180 Hinge
BBB REMAN	8066		10459077	26SI	12	75	J180 Hinge
LESTER	8070	19020310		22SI	12	150	J180 Hinge
LESTER	8071	19020310		22SI	12	150	J180 Hinge
LESTER	8072	19020310		22SI	12	150	J180 Hinge
LESTER	8074	19020310		22SI	12	150	J180 Hinge
LESTER	8075	19020310		22SI	12	150	J180 Hinge
LESTER	8076	19020310		22SI	12	150	J180 Hinge
WAI	8076N	19020310		22SI	12	150	J180 Hinge
BBB REMAN	8078	19020310		22SI	12	150	J180 Hinge
LESTER	8078	19020310		22SI	12	150	J180 Hinge
BBB REMAN	8079	19020310		22SI	12	150	J180 Hinge
LESTER	8079	19020310		22SI	12	150	J180 Hinge
LESTER	8085		10459196	33SI	24	100	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LESTER	8087	19020310		22SI	12	150	J180 Hinge
LESTER	8088	19020310		22SI	12	150	J180 Hinge
WAI	8320N	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	8322N	8600280		40SI	12	275	J180 Long Hinge
WAI	8329N	8600310		24SI	12	160	J180 Hinge
BBB REMAN	8362	19020889		22SI	12	150	Pad
LESTER	8362	19020889		22SI	12	150	Pad
WAI	8362N	19020889		22SI	12	150	Pad
WAI	8410N	8600889		24SI	12	160	Pad
LESTER	8427	93088		REFRIGERATION/AUX	12	65	0
Competitive Brand	85110755	8600064/8600066		35SI	12	140	J180 Hinge/Pad
Competitive Brand	85110756	8600065		35SI	12	140	Quad
WAI	8542N	8600232		36SI	24	105	Pad
Competitive Brand	860066	8600066		35SI	12	140	Pad
Competitive Brand	86034170	8600043		24SI	12	160	Pad
LESTER	8607	8600064		35SI	12	140	J180 Hinge
WAI	8607N	8600064		35SI	12	140	J180 Hinge
LESTER	8609	8600066		35SI	12	140	Pad
WAI	8609N	8600066		35SI	12	140	Pad
LESTER	8615	93073		REFRIGERATION/AUX	12	65	0
LESTER	8616	93087		REFRIGERATION/AUX	12	37	0
WAI-WPS NEW	8616N	93087		REFRIGERATION/AUX	12	37	0
LESTER	8617	93083		REFRIGERATION/AUX	12	90	0
LESTER	8618	93074		REFRIGERATION/AUX	12	65	0
LESTER	8619	93074		REFRIGERATION/AUX	12	65	0
WAI-WPS NEW	8619N	93074		REFRIGERATION/AUX	12	65	0
LESTER	8622	93091		REFRIGERATION/AUX	12	105	0
LESTER	8679	93074		REFRIGERATION/AUX	12	65	0
LEECE NEVILLE	8680LCF	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
WAI	8681N	8600094		40SI	12	275	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LESTER	8693	8600889		24SI	12	160	Pad
LESTER	8718	8600310		24SI	12	160	J180 Hinge
WAI	8718N	8600310		24SI	12	160	J180 Hinge
LESTER	8719	8600889		24SI	12	160	Pad
WAI	8719N	8600889		24SI	12	160	Pad
WAI	8722N	19020208		11SI	12	95	Spool
Competitive Brand	881247	19020707		5SI	12	50	Spool
LEECE NEVILLE	8815LCF	8600308		28SI	12	160	J180 Long Hinge
AC DELCO	88860417	19020310		22SI	12	150	J180 Hinge
AC DELCO	88860766		10459076	26SI	24	75	J180 Hinge
AC DELCO	88860768		10459064	26SI	24	50	J180 Hinge
AC DELCO	88860770		10459065	26SI	12	85	J180 Hinge
Competitive Brand	889955	19020706		5SI	12	50	Spool
Competitive Brand	889956	19020707		5SI	12	50	Spool
WAI	8912N	8600628		40SI	12	320	Pad
MOTOROLA	8AL2019F	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8AR2070KA	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EA2018N	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EA2018NA	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2003FA	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2003FB	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2003FC	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2004DC	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2005NC	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2005ND	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2006FB	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2007NA	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2008FD	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2009F	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2009FA	93087		REFRIGERATION/AUX	12	37	0

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MOTOROLA	8EK2009FB	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2009FC	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2009FD	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2010N	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2010NA	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2010NB	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EK2011FB	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2011FC	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8EK2110NA	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EM2012N	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EM2012NA	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EM2012NAS	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EM2013N	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8EM2013NA	93073		REFRIGERATION/AUX	12	65	0
LEECE NEVILLE	8LHA/P	19020889		22SI	12	150	Pad
LEECE NEVILLE	8LHA2054UA	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	8LHA2054UAH	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	8LHA2057VA	8600310		24SI	12	160	J180 Hinge
PRESTOLITE	8LHA2057VGH	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	8LHA2070VE	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	8LHA2070VF	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8LHA2070VGH	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	8LHA2077VA	8600889		24SI	12	160	Pad
LEECE NEVILLE	8LHA2096VA	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	8LHA2098V	8600310		24SI	12	160	J180 Hinge
MOTOROLA	8LHA2121V	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8LHA2134V	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8LHA2159V	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8LHA2252V	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8LHA2275V	8600311		28SI	12	180	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	8LHA3096U	8600468		28SI	24	110	J180 Long Hinge
LEECE NEVILLE	8LHA3096UC36	8600468		28SI	24	110	J180 Long Hinge
LEECE NEVILLE	8LHP2170V	19020889		22SI	12	150	Pad
LEECE NEVILLE	8LHP2170VE	19020889		22SI	12	150	Pad
LEECE NEVILLE	8LHP2170VF	8600889		24SI	12	160	Pad
LEECE NEVILLE	8LHP2170VH	19020889		22SI	12	150	Pad
LEECE NEVILLE	8LHP2246VAH	8600315		28SI	12	160	Pad
LEECE NEVILLE	8LHP2253V	8600889		24SI	12	160	Pad
LEECE NEVILLE	8LHP2276V	8600316		28SI	12	180	Pad
Competitive Brand	8M0033841	19020706		5SI	12	50	Spool
Competitive Brand	8M0033842	19020707		5SI	12	50	Spool
Competitive Brand	8M0037817	8400223		11SI	12	95	Spool
MOTOROLA	8MR2013L	93073		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2121L	93090		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2121LA	93090		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2122U	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2122UA	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2122UB	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2122UC	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2122UD	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2124L	93090		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2124LA	93090		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2125L	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2125LA	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2126U	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2126UA	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2127L	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2127LA	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2127LB	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2150L	93088		REFRIGERATION/AUX	12	65	0

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MOTOROLA	8MR2156U	93102		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2170F	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8MR2171F	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8MR2172F	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2175F	93087		REFRIGERATION/AUX	12	37	0
MOTOROLA	8MR2197T	93083		REFRIGERATION/AUX	12	90	0
MOTOROLA	8MR2215D	93081		REFRIGERATION/AUX	12	23	0
MOTOROLA	8MR2313U	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2316L	93090		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2324L	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2325U	93091		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2326L	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2327L	93074		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2343	93088		REFRIGERATION/AUX	12	65	0
MOTOROLA	8MR2344	93102		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2344U	93102		REFRIGERATION/AUX	12	105	0
MOTOROLA	8MR2348	93083		REFRIGERATION/AUX	12	90	0
LEECE NEVILLE	8RG2118	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	8SC2023Z	8600889		24SI	12	160	Pad
WILSON	90-01-3157N	1117619		20SI	24	50	J180 Hinge
WILSON	90-01-4058N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4072N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4074N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4093N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4105N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4109N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4269N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4270N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4297N	19020310		22SI	12	150	J180 Hinge
WILSON	90-01-4393N	19020889		22SI	12	150	Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
WILSON	90014473N	8600066/8600127		35SI/36SI	12	140/170	Pad
WILSON	90-01-4511N	8600126		36SI	12	170	J180 Hinge
WILSON	90-01-4512N	8600125		36SI	12	170	Quad
WILSON	90-01-4513N	8600066		35SI	12	140	Pad
WILSON	90014516	8600127		36SI	12	170	Pad
WILSON	90014516N	8600127		36SI	12	170	Pad
WILSON	90-01-4576N	8600310		24SI	12	160	J180 Hinge
WILSON	90-01-4577N	8600889		24SI	12	160	Pad
WILSON	90-01-4720N	8600316		28SI	12	180	Pad
WILSON	90-01-4721N	8600223		28SI	12	180	J180 Short Hinge
WILSON	90014722	8600311		28SI	12	180	J180 Long Hinge
WILSON	90-01-4723N	8600314		28SI	12	200	Pad
WILSON	90-01-4724N	8600313		28SI	12	200	J180 Short Hinge
WILSON	90014730	8600201		28SI	12	160	Pad
Competitive Brand	90027233	19020312		22SI	12	100	J180 Hinge
Competitive Brand	90032939	8600110		36SI	24	95	Quad
WILSON	90-04-7039N	8600310		24SI	12	160	J180 Hinge
WILSON	90047134	8600338		40SI	12	240	Pad
WILSON	90-05-9295N	8600889		24SI	12	160	Pad
WILSON	90-05-9304N	8600310		24SI	12	160	J180 Hinge
WILSON	90-15-6233N	61013382		REFRIGERATION/AUX	12	37	0
WILSON	90-15-6280N	93070		REFRIGERATION/AUX	12	65	0
WILSON	90-15-6569N	8600889		24SI	12	160	Pad
WILSON	90-15-6570N	8600313		28SI	12	200	J180 Short Hinge
REMY POWER PRODUCTS	93001	8600310		24SI	12	160	J180 Hinge
REMY POWER PRODUCTS	93035	61013122		REFRIGERATION/AUX	12	70	Single Spool
REMY POWER PRODUCTS	93036	61013122		REFRIGERATION/AUX	12	70	Single Spool
REMY POWER PRODUCTS	93037	61013122		REFRIGERATION/AUX	12	70	Single Spool
REMY POWER PRODUCTS	93041	8600308		28SI	12	160	J180 Long Hinge
REMY POWER PRODUCTS	93055	8600308		28SI	12	160	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
REMY POWER PRODUCTS	93059	61013122		REFRIGERATION/AUX	12	70	Single Spool
Competitive Brand	9705428	1117965		21SI	12	130	J180 Hinge
LEECE NEVILLE	A0012805JB	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	A001090749	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	A001090772	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A00114852AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A00114854AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0012302JB	1117733		30SI	32	60	J180 Hinge
LEECE NEVILLE	A0012500JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012500LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012505LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012513LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012670LC	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	A0012671LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012680LCF	8600310/19020310		24SI/22SI	12	160/150	J180 Hinge
LEECE NEVILLE	A0012706LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012713LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012800JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012800LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012801LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012802LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	A0012805JB	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	A0012805LC	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	A0012808LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012815LCF	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012819LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0012824LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	A0012825LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	A0012828LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	A0012913LC	8600308		28SI	12	160	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	A0014725AA	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0014805JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A0014832LCH	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	A0014833LCH	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	A0014833LGH	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
LEECE NEVILLE	A0014835PAH	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	A0014836AAH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014836LGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014842LCH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014846AAH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014850AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014852AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014854AA	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014856AA	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014860AA	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014860JB	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014860JBH	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014861JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014863JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014863JBH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A0014864JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014867JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014867JBH	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014867JGH	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014868JGH	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014869JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014870AA	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014870JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014871JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014872AA	8600280		40SI	12	275	J180 Long Hinge

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	A0014872JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014873JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014874JB	8600280		40SI	12	275	J180 Long Hinge
LEECE NEVILLE	A0014884JB	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	A0014885JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014887JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	A0014890AA	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	A0014890JB	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	A0014892AA	8600300		40SI	12	300	J180 Long Hinge
LEECE NEVILLE	A0014907PAH	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014912PGH	8600628		40SI	12	320	Pad
LEECE NEVILLE	A0014923PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014931PAH	8600628		40SI	12	320	Pad
LEECE NEVILLE	A0014939AAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014939PAH	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	A0014939PGH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014940PA	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	A0014942PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014943PGH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014944PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014945AAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014947PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014948PA	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	A0014949GH	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014949PA	8600094		40SI	12	275	Pad
PRESTOLITE	A0014949PAH	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014949PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014951PA	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014951PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014951PGH	8600314		28SI	12	200	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	A0014953PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A00149551PGH	8600338		40SI	12	240	Pad
LEECE NEVILLE	A0014958PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	A0014959PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	A0014962PA	8600628		40SI	12	320	Pad
LEECE NEVILLE	A0014962PAH	8600628		40SI	12	320	Pad
LEECE NEVILLE	A0014962PGH	8600628		40SI	12	320	Pad
LEECE NEVILLE	A0014966PAA	8600298		40SI	12	300	Pad
LEECE NEVILLE	A0014967PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014975PAA	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0014977AAH	8600338		40SI	12	240	Pad
LEECE NEVILLE	A0014979PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014982AAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	A0014993PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	A0018680LCF	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
LEECE NEVILLE	A0018815LCF	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	A002801LC	8600308/8600311		28SI	12	160/180	J180 Long Hinge
MITSUBISHI	A003TW0071	8600314/ 8600338/8600707		28SI/40SI/38SI	12	200/240/215	Pad
MITSUBISHI	A004TU1771	8600127/ 8600315/8600889		36SI/28SI/24SI	12	170/160/160	Pad
DIXIE	A-1101	19010002	10459076	26SI	24	75	J180 Hinge
DIXIE	A-1102	1117733		30SI	32	60	J180 Hinge
DIXIE	A-1103		1117746	30SI	24	60	J180 Hinge
DIXIE	A-1117	1117645/1117647	11576974	20SI	24	45/35	J180 Hinge
DIXIE	A-1118	1117641	10459020	20SI	12	60	J180 Hinge
DIXIE	A-12651	93098		REFRIGERATION/AUX	12	60	0
DIXIE	A-129	19010001	10459064	26SI	24	50	J180 Hinge
DIXIE	A-1331		10459065/10459077	26SI	12	85/75	J180 Hinge
DIXIE	A-1332	8600064		35SI	12	140	J180 Hinge
DIXIE	A-1339	1117805/1117821	10459057	30SI	24	75/80	J180 Hinge
DIXIE	A-1351	19010108/ 19010111/19010182		21SI	24	50/70/70	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DIXIE	A-1358	19010166		21SI	12	115	J180 Hinge
DIXIE	A-1368	19010108		21SI	24	50	J180 Hinge
PARIS-RHONE	A13N291	93076		REFRIGERATION/AUX	12	70	0
PARIS-RHONE	A13N293	93076		REFRIGERATION/AUX	12	70	0
DIXIE	A-1442		10459066	26SI	12	85	J180 Hinge
DIXIE	A-1444	1117817	10459120	30SI	24	100	J180 Hinge
DIXIE	A-1450	19020396		22SI	12	100	J180 Hinge
DIXIE	A-1456	8600064		35SI	12	140	J180 Hinge
DIXIE	A-1457	19011153	10459196	33SI	24	100	J180 Hinge
DIXIE	A-1460		10459199	34SI	24	100	Quad
DIXIE	A-1474	19010001	10459064	26SI	24	50	J180 Hinge
DIXIE	A-1475	19010000/19010002		26SI	24	75	J180 Hinge
DIXIE	A-1492	19020312		22SI	12	100	J180 Hinge
DIXIE	A-1493	19020310		22SI	12	150	J180 Hinge
DIXIE	A-1494	19020310		22SI	12	150	J180 Hinge
DIXIE	A-1543	19010200		21SI	24	70	J180 Hinge
DIXIE	A-1544	1117965		21SI	12	130	J180 Hinge
DIXIE	A-1553	8600066		35SI	12	140	Pad
LEECE NEVILLE	A160203	8600338		40SI	12	240	Pad
LEECE NEVILLE	A160204	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A160207	8600314		28SI	12	200	Pad
LEECE NEVILLE	A160208	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	A160210	8600315/8600316		28SI	12	160/180	Pad
DIXIE	A-1621	8600066		35SI	12	140	Pad
DIXIE	A-1623	19020614		7SI	12	70	Spool
DIXIE	A-1663	19020604		7SI	12	70	J180 Hinge
DIXIE	A-1664	19020608		7SI	12	70	Spool
DIXIE	A-1665	19020609		7SI	12	70	J180 Hinge
DIXIE	A-1666	19020707		5SI	12	50	Spool
DIXIE	A-1667	19020706		5SI	12	50	Spool

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DIXIE	A-1668	19020612		7SI	12	70	J180 Hinge
DIXIE	A-1669	19020617		7SI	12	70	Spool
DIXIE	A-1672	19020606		7SI	12	70	Spool
DIXIE	A-1673	19020616		7SI	12	70	Spool
DIXIE	A-1697	8600032		24SI	12	100	J180 Hinge
DIXIE	A-1698	19020903		24SI	12	130	J180 Hinge
DIXIE	A-1699	19020901		24SI	12	145	J180 Hinge
DIXIE	A-1701	8600017		24SI	24	70	J180 Hinge
DIXIE	A-1703	19020900		24SI	12	145	Pad
DIXIE	A-1704	8600143		24SI	12	160	Pad
DIXIE	A-1707	8600126		36SI	12	170	J180 Hinge
DIXIE	A-1708	8600125		36SI	12	170	Quad
DIXIE	A-1709	8600127		36SI	12	170	Pad
DIXIE	A-1714	8600110		36SI	24	95	Quad
DIXIE	A-1719	8600064		35SI	12	140	J180 Hinge
DIXIE	A-1720	8600065		35SI	12	140	Quad
DIXIE	A-1721	8600066		35SI	12	140	Pad
DIXIE	A-1723	19020208		11SI	12	95	Spool
DIXIE	A-1726	8600030		11SI	12	95	Spool
DIXIE	A-1729	19011185		34SI	24	100	Pad
DIXIE	A-1751	8600310		24SI	12	160	J180 Hinge
DIXIE	A-1784	8600310		24SI	12	160	J180 Hinge
DIXIE	A-1785	8600889		24SI	12	160	Pad
DIXIE	A-6250	61013382		REFRIGERATION/AUX	12	37	0
DIXIE	A-6252	93070		REFRIGERATION/AUX	12	65	0
DIXIE	A-6381	93082		REFRIGERATION/AUX	12	120	0
DIXIE	A-7000	8600338/8600707		40SI/38SI	12	240/215	Pad
DIXIE	A-760	8600308		28SI	12	160	J180 Long Hinge
DIXIE	A-772	8600310		24SI	12	160	J180 Hinge
DIXIE	A-795	8600307		28SI	12	200	J180 Long Hinge

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DIXIE	A-80052	93098		REFRIGERATION/AUX	12	60	0
LEECE NEVILLE	A8020002-001	8600314/8600707		28SI/38SI	12	200/215	Pad
Competitive Brand	A8020012-001	8600311		28SI	12	180	J180 Long Hinge
Competitive Brand	A8020015	8600338		40SI	12	240	Pad
Competitive Brand	A8020017-001	8600316		28SI	12	180	Pad
Competitive Brand	A8020018-001	8600314		28SI	12	200	Pad
DIXIE	A-80410	93097		REFRIGERATION/AUX	12	60	0
DIXIE	A-8278	93096		REFRIGERATION/AUX	12	40	0
DIXIE	A-8512	93096		REFRIGERATION/AUX	12	40	0
FLEETPRIDE PRIMAPOWER	A8-555-0160	8600310		24SI	12	160	J180 Hinge
FLEETPRIDE PRIMAPOWER	A8-555-0160PM	8600889		24SI	12	160	Pad
DIXIE	A8760	8600126		36SI	12	170	J180 Hinge
FLEETPRIDE PRIMAPOWER	A9-022-0145PM	19020889		22SI	12	150	Pad
FLEETPRIDE PRIMAPOWER	A9-022-0150	19020310		22SI	12	150	J180 Hinge
FLEETPRIDE PRIMAPOWER	A9-024-0160	8600310		24SI	12	160	J180 Hinge
FLEETPRIDE PRIMAPOWER	A9-024-0160PM	8600889		24SI	12	160	Pad
FLEETPRIDE PRIMAPOWER	A9-035-0140	8600064		35SI	12	140	J180 Hinge
FLEETPRIDE PRIMAPOWER	A9-035-0140PM	8600066		35SI	12	140	Pad
DIXIE	A-9199	93073		REFRIGERATION/AUX	12	65	0
DIXIE	A-9210	93088		REFRIGERATION/AUX	12	65	0
DIXIE	A-9211	93088		REFRIGERATION/AUX	12	65	0
DIXIE	A-9217	93073		REFRIGERATION/AUX	12	65	0
DIXIE	A-9225	93088		REFRIGERATION/AUX	12	65	0
DIXIE	A-9234	93081		REFRIGERATION/AUX	12	23	0
DIXIE	A-9247	93088		REFRIGERATION/AUX	12	65	0
DIXIE	A-9254	93074		REFRIGERATION/AUX	12	65	0
DIXIE	A-9334	93090		REFRIGERATION/AUX	12	65	0
DIXIE	A-9335	93091		REFRIGERATION/AUX	12	105	0
DIXIE	A-9347	93088		REFRIGERATION/AUX	12	65	0
DIXIE	A-9349	93088		REFRIGERATION/AUX	12	65	0

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
DIXIE	A-9357	93083		REFRIGERATION/AUX	12	90	0
DIXIE	A-9387	93081		REFRIGERATION/AUX	12	23	0
DIXIE	A-9397	93076		REFRIGERATION/AUX	12	70	0
DIXIE	A-9398	93076		REFRIGERATION/AUX	12	70	0
DIXIE	A-9399	93073		REFRIGERATION/AUX	12	65	0
DIXIE	A-9409	93073		REFRIGERATION/AUX	12	65	0
DIXIE	A-9426	8600889		24SI	12	160	Pad
DIXIE	A-9448	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	ABP N15 AV1143J170	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	ABP N15 AV12007P210	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	ABP N15 BLP185	8600316		28SI	12	180	Pad
Arrowhead	ADR0045	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0046	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0100	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0101	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0203	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0205	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0213	19020310		22SI	12	150	J180 Hinge
Arrowhead	ADR0226	19020310		22SI	12	150	J180 Hinge
BOSCH	AL0791N	8600658		18SI	12	175	Special
BOSCH	AL0791X	8600658		18SI	12	175	Special
BOSCH	AL0798N	8600658		18SI	12	175	Special
BOSCH	AL0798X	8600658		18SI	12	175	Special
BOSCH	AL0801N	8600658		18SI	12	175	Special
BOSCH	AL0801X	8600658		18SI	12	175	Special
BOSCH	AL0843X	8600763		18SI	12	175	Special
BOSCH	AL10025X	19020310		22SI	12	150	J180 Hinge
BOSCH	AL5012N	93070		REFRIGERATION/AUX	12	65	0
BOSCH	AL9120N	93082		REFRIGERATION/AUX	12	120	0
BOSCH	AL927N	61013382		REFRIGERATION/AUX	12	37	0

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
BOSCH	AL928N	93070		REFRIGERATION/AUX	12	65	0
BOSCH	AL929N	93082		REFRIGERATION/AUX	12	120	0
BOSCH	AL9920LL	8600316		28SI	12	180	Pad
BOSCH	AL9921LL	8600314/8600707		28SI/38SI	12	200/215	Pad
BOSCH	AL9922LL	8600313		28SI	12	200	J180 Short Hinge
BOSCH	AL9960LH	8600310/ 8600312/19020310		24SI/28SI/22SI	12	160/160/150	J180 Hinge/ J180 Short Hinge/ J180 Hinge
BOSCH	AL9961LH	8600315/ 8600889/19020889		28SI/24SI/22SI	12	160/160/150	Pad
BOSCH	AL9961LH787042	8600889		24SI	12	160	Pad
BOSCH	AL9962SB	8600314/8600707		28SI/38SI	12	200/215	Pad
BOSCH	AL9963SB	8600313		28SI	12	200	J180 Short Hinge
UNIPOINT	ALT-0050	8600310		24SI	12	160	J180 Hinge
UNIPOINT	ALT-0060	8600310		24SI	12	160	J180 Hinge
UNIPOINT	ALT-0061	8600889		24SI	12	160	Pad
UNIPOINT	ALT-0070	8600310		24SI	12	160	J180 Hinge
UNIPOINT	ALT-0271	8600094		40SI	12	275	Pad
UNIPOINT	ALT0320	8600634/61003345		40SI/55SI	12	320/430	J180 Long Hinge/ J180 Hinge
UNIPOINT	ALT-1003	19020889		22SI	12	150	Pad
UNIPOINT	ALT-1004	19020310		22SI	12	150	J180 Hinge
UNIPOINT	ALT-1007	19020310		22SI	12	150	J180 Hinge
UNIPOINT	ALT1101	19010182		21SI	24	70	J180 Hinge
UNIPOINT	ALT-1241	8600310		24SI	12	160	J180 Hinge
UNIPOINT	ALT-1242	8600889		24SI	12	160	Pad
UNIPOINT	ALT-1243	8600310		24SI	12	160	J180 Hinge
UNIPOINT	ALT-1280	8600314		28SI	12	200	Pad
UNIPOINT	ALT1281	8600313		28SI	12	200	J180 Short Hinge
UNIPOINT	ALT-2235	93070		REFRIGERATION/AUX	12	65	0
UNIPOINT	ALT-2237	93082		REFRIGERATION/AUX	12	120	0
UNIPOINT	ALT-5302	93096		REFRIGERATION/AUX	12	40	0
UNIPOINT	ALT-7003	93105		REFRIGERATION/AUX	12	70	0
BOSCH	AM0071	8600707		38SI	12	215	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
MITSUBISHI	AM0071	600314/ 8600338/8600707		28SI/40SI/38SI	12	200/ 240/215	Pad
MITSUBISHI	AM1171	8600127		36SI	12	170	Pad
MITSUBISHI	AM1771	8600127		36SI	12	170	Pad
Competitive Brand	AT160192	1117641		20SI	12	60	J180 Hinge
LEECE NEVILLE	AV1160P2003	8600338		40SI	12	240	Pad
LEECE NEVILLE	AV1160P2007	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	AV1555J	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	AV1555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	AV1160P2007	8600314		28SI	12	200	Pad
LEECE NEVILLE	AVI143J2001	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	AVI143J2002	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	AVI143P2003	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	AVI160J2004	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	AVI160J2008	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	AVI160J2014	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	AVI160P2003	8600338		40SI	12	240	Pad
LEECE NEVILLE	AVI160P2003N	8600338		40SI	12	240	Pad
LEECE NEVILLE	AVI160P2007	8600314		28SI	12	200	Pad
LEECE NEVILLE	AVI160P2007N	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	AVI160P2009	8600314		28SI	12	200	Pad
LEECE NEVILLE	AVI160P2010	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	AVI160P2012	8600314		28SI	12	200	Pad
LEECE NEVILLE	AVI160P2013N	8600889		24SI	12	160	Pad
LEECE NEVILLE	AVI2800P	8600314		28SI	12	200	Pad
LEECE NEVILLE	AVI555J	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	AVI555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	AVI55P	8600889		24SI	12	160	Pad
BIRKSON	BK11. N 20302	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	BLD2301	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2301GH	8600308		28SI	12	160	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	BLD2301H	8600064		35SI	12	140	J180 Hinge
LEECE NEVILLE	BLD2301RM	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2302	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2305	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2305GH	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2305RM	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2306	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLD2307	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2307GH	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2307RM	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2308	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2308GH	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2308RM	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	BLD2309	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLD2310	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLD2311	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLD2312	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLD2331GH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	BLD2333GH	8600311/8600390		28SI/40SI	12	180/240	J180 Long Hinge
LEECE NEVILLE	BLD3314GH	61000853		40SI	24	160	J180 Long Hinge
LEECE NEVILLE	BLD3315GH	61000853		40SI	24	160	J180 Long Hinge
LEECE NEVILLE	BLD3365GH	61000853		40SI	24	160	J180 Long Hinge
LEECE NEVILLE	BLD4012	8600634/61003345		40SI/55SI	12	320/430	J180 Long Hinge/ J180 Hinge
LEECE NEVILLE	BLD4016	61003345		55SI	12	430	J180 Hinge
LEECE NEVILLE	BLD4102	8600564		55SI	24	275	J180 Hinge
LEECE NEVILLE	BLD4105	8600564		55SI	24	275	J180 Hinge
LEECE NEVILLE	BLP2131GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2204GH	8600314		28SI	12	200	Pad
LEECE NEVILLE	BLP2301GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2303	8600066		35SI	12	140	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	BLP2303GH	8600066		35SI	12	140	Pad
LEECE NEVILLE	BLP2303H	8600066		35SI	12	140	Pad
LEECE NEVILLE	BLP2304	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2306	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2306GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2309	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2309GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2309H	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2310	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2310GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2311	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2312	8600127		36SI	12	170	Pad
MITSUBISHI	BLP2329GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	BLP2332GH	8600338		40SI	12	240	Pad
LEECE NEVILLE	BLP2333GH	8600316		28SI	12	180	Pad
LEECE NEVILLE	BLP2334GH	8600338		40SI	12	240	Pad
PRESTOLITE	BLP2356H	8600316		28SI	12	180	Pad
LEECE NEVILLE	BLP2357GH	8600707		38SI	12	215	Pad
LEECE NEVILLE	BLP2361H	8600316/8600707		28SI/38SI	12	180/215	Pad
LEECE NEVILLE	BLP2362GH	8600707		38SI	12	215	Pad
LEECE NEVILLE	BLP2363H	8600338/8600707		40SI/38SI	12	240/215	Pad
LEECE NEVILLE	BLP3250H-MP	8600668		40SI	24	160	Pad
LEECE NEVILLE	BLP3312	8600668		40SI	24	160	Pad
LEECE NEVILLE	BLP3384	8600668		40SI	24	160	Pad
LEECE NEVILLE	BLP3384H	8600668		40SI	24	160	Pad
LEECE NEVILLE	BLP3384HMP	8600668		40SI	24	160	Pad
LEECE NEVILLE	BLP4002	8600628		40SI	12	320	Pad
LEECE NEVILLE	BLP4002H	8600628/61006079		40SI/55SI	12	320/430	Pad/Long Pad
LEECE NEVILLE	BLP4003	61006079		55SI	12	430	Long Pad (105MM)
LEECE NEVILLE	BLP4004H	8600628/61006079		40SI/55SI	12	320/430	Pad/Long Pad

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	BLP4005	8600338		40SI	12	240	Pad
LEECE NEVILLE	BLP4005H	8600338/8600707		40SI/38SI	12	240/215	Pad
LEECE NEVILLE	BLP4006HN	8600628		40SI	12	320	Pad
LEECE NEVILLE	BLP4007H	8600338		40SI	12	240	Pad
LEECE NEVILLE	BLP4009	8600094/8600298		40SI	12	275/300	Pad
LEECE NEVILLE	BLP4011	8600338		40SI	12	240	Pad
LEECE NEVILLE	BLP4101	61006080		55SI	12	250	Long Pad (105MM)
LEECE NEVILLE	BLP4106	61006081		55SI	32	275	Long Pad (105MM)
J & N ELECTRIC	BULK110-555PHO	19020889		22SI	12	150	Pad
C. E. NIEHOFF	C510	8600299		40SI	12	300	J180 Short Hinge
C. E. NIEHOFF	C524	8600298		40SI	12	300	Pad
C. E. NIEHOFF	C527	61006079		55SI	12	430	Long Pad (105MM)
C. E. NIEHOFF	C531	61006079		55SI	12	430	Long Pad (105MM)
C. E. NIEHOFF	C630	8600634/61003345		40SI/55SI	12	320/430	J180 Long Hinge/ J180 Hinge
C. E. NIEHOFF	C680	61006079		55SI	12	430	Long Pad (105MM)
Competitive Brand	DR 8600066	8600066		35SI	12	140	Pad
Competitive Brand	DR8600127	8600127		36SI	12	170	Pad
Competitive Brand	DR8600247	8600247		35SI	12	135	Pad
Competitive Brand	DR8600310	8600310		24SI	12	160	J180 Hinge
BOSCH	F-005-A00-020	93082		REFRIGERATION/AUX	12	120	0
Competitive Brand	F5HZ 10346 B	19010166		21SI	12	115	J180 Hinge
LEECE NEVILLE	GL-8663	8600298		40SI	12	300	Pad
Competitive Brand	GM38884	19020604		7SI	12	70	J180 Hinge
DENSO	HDBSC 150A	8600668		40SI	12	160	Pad
Competitive Brand	K032049	19020609		7SI	12	70	J180 Hinge
LEECE NEVILLE	K371-209-1	8600127		36SI	12	170	Pad
LEECE NEVILLE	LBA2106	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LBA2107GH	8600126		36SI	12	170	J180 Hinge
LEECE NEVILLE	LBA2108	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LBA2108GH	8600308		28SI	12	160	J180 Long Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	LBA2115	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	LBA2195	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LBA2198MDH	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LBA2201H	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LBP2176GH	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2180	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2180GH	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2187GH	19020889		22SI	12	150	Pad
LEECE NEVILLE	LBP2188H	19020889		22SI	12	150	Pad
LEECE NEVILLE	LBP2190	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2190H	19020889		22SI	12	150	Pad
LEECE NEVILLE	LBP2203H	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2224H	8600889		24SI	12	160	Pad
LEECE NEVILLE	LBP2243GH	8600127		36SI	12	170	Pad
BOSCH	LH160	8600315		28SI	12	160	Pad
BOSCH	LH200	8600314		28SI	12	200	Pad
BOSCH	LHX160	8600889		24SI	12	160	Pad
BOSCH	LIL160	8600889		24SI	12	160	Pad
LEECE NEVILLE	LN110450RM	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN110-555HD	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN 110 555JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN110555ORRM	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN 110-555PHO	19020889		22SI	12	150	Pad
LEECE NEVILLE	LN110555PRM	19020889		22SI	12	150	Pad
LEECE NEVILLE	LN110555RM	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN110-775P	8600316		28SI	12	180	Pad
LEECE NEVILLE	LN2500JB	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2670LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2670LCRM	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2680LCF	8600310/19020310		24SI/22SI	12	160/150	J180 Hinge

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	LN 2706LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN 2713LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN 2800J	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2800LCRM	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2805JB	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	LN 2808LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2813LCRM	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	LN 2819LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2824LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN2913LCRM	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN339142RM	8600094		40SI	12	275	Pad
LEECE NEVILLE	LN 4725AA	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN 4833LGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	LN 4860JB	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	LN4863JBRM	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	LN4884JBRM	8600307/8600390		28SI/40SI	12	200/240	J180 Long Hinge
LEECE NEVILLE	LN4887JB	8600390		40SI	12	240	J180 Long Hinge
LEECE NEVILLE	LN 4890JB	8600634		40SI	12	320	J180 Long Hinge
LEECE NEVILLE	LN 4912PGH	8600628		40SI	12	320	Pad
LEECE NEVILLE	LN4939AAH	8600316		28SI	12	180	Pad
LEECE NEVILLE	LN4940PARM	8600314/8600338		28SI/40SI	12	200/240	Pad
LEECE NEVILLE	LN4959PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	LN 4962PAH	8600628		40SI	12	320	Pad
LEECE NEVILLE	LN 4967PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	LN 4993PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	LN8680LCF	8600308/8600310		28SI/24SI	12	160	J180 Long Hinge/ J180 Hinge
LEECE NEVILLE	LN 8815LCF	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LN A0014912PGH	8600628		40SI	12	320	Pad
LEECE NEVILLE	LN A160203	8600338		40SI	12	240	Pad
LEECE NEVILLE	LN A160207	8600314/8600707		28SI/38SI	12	200/215	Pad

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	LN AV1160P2007	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	LN AV1555J	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	LNAV1555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	LNBLP2309GH	8600127		36SI	12	170	Pad
LEECE NEVILLE	LNBLP2333GH	8600316		28SI	12	180	Pad
LEECE NEVILLE	LN BLP2334GH	8600316		28SI	12	180	Pad
LEECE NEVILLE	LNBLP4005H	8600338		40SI	12	240	Pad
LEECE NEVILLE	LND AV1555J	8600308/8600311		28SI	12	160/180	J180 Long Hinge
LEECE NEVILLE	LND AV1555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	LN LBA2106	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	LNLBP2189GH	8600127/8600889		36SI/24SI	12	170/160	Pad
LEECE NEVILLE	LNLHA2070	8600310		24SI	12	160	J180 Hinge
WAI-WPS NEW	LVN-110-683	93073		REFRIGERATION/AUX	12	65	0
LEECE NEVILLE	MDA2932	8600310		24SI	12	160	J180 Hinge
LEECE NEVILLE	MDP2934	8600889		24SI	12	160	Pad
mitsubishi	MIBA3TW0071	8600314/8600338		28SI/40SI	12	200/240	Pad
mitsubishi	MIBA4TU1771	8600127		36SI	12	170	Pad
mitsubishi	MITAM1771	8600127		36SI	12	170	Pad
Competitive Brand	N-185983	19020604		7SI	12	70	J180 Hinge
Competitive Brand	N-186293	19020609		7SI	12	70	J180 Hinge
Competitive Brand	N-186298	19020612		7SI	12	70	J180 Hinge
Competitive Brand	N-186299	19020616		7SI	12	70	Spool
Competitive Brand	N-186451	8600002		11SI	12	95	Spool
Competitive Brand	N-186455	19020707		5SI	12	50	Spool
DENSO	NPD1012118380	8600127/8600889		36SI/24SI	12	170/160	Pad
Competitive Brand	RA097007	19020612/19020617		7SI	12	70	J180 Hinge/Spool
Competitive Brand	RA097007B	19020608		7SI	12	70	Spool
TRP	RE024J	8600310		24SI	12	160	J180 Hinge
TRP	RE024P	8600889		24SI	12	160	Pad
TRP	RE035JS	8600064		35SI	12	140	J180 Hinge

Alternator

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
TRP	RE035PS	8600066		35SI	12	140	Pad
TRP	RE036JS	8600126		36SI	12	170	J180 Hinge
TRP	RE036PS	8600127		36SI	12	170	Pad
TRP	RE55J	8600310		24SI	12	160	J180 Hinge
TRP	REN022J	19020310		22SI	12	150	J180 Hinge
TRP	REN022P	19020889		22SI	12	150	Pad
MHC ROADFORCE	RF10909176	8600066		35SI	12	140	Pad
MHC ROADFORCE	RF189082032	8600310		24SI	12	160	J180 Hinge
MHC ROADFORCE	RF19020310	19020310		22SI	12	150	J180 Hinge
MHC ROADFORCE	RF49055743	19020889		22SI	12	150	Pad
MHC ROADFORCE	RF49907022	19020889		22SI	12	150	Pad
MHC ROADFORCE	RF559066828	8600889		24SI	12	160	Pad
MHC ROADFORCE	RF58904626	8600310		24SI	12	160	J180 Hinge
MHC ROADFORCE	RF64902611	19020310		22SI	12	150	J180 Hinge
MHC ROADFORCE	RF79097019	19020310		22SI	12	150	J180 Hinge
MHC ROADFORCE	RF851051533	8600064		35SI	12	140	J180 Hinge
MHC ROADFORCE	RF8600066	8600066		35SI	12	140	Pad
MHC ROADFORCE	RF8600310	8600310		24SI	12	160	J180 Hinge
MHC ROADFORCE	RF8904714	8600889		24SI	12	160	Pad
LEECE NEVILLE	RJ4870	8600280		40SI	12	275	J180 Long Hinge
VALEO	TG17C028	8600763		18SI	12	175	Special
Competitive Brand	VJ2735	19010002		26SI	24	75	J180 Hinge
Competitive Brand	VZ462-3	19010001		26SI	24	50	J180 Hinge
Competitive Brand	X00007196	1117817		30SI	24	100	J180 Hinge
LEECE NEVILLE	ZLN110444	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	ZLN110444P	19020889		22SI	12	150	Pad
LEECE NEVILLE	ZLN110555JHO	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	ZLN110555N	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	ZLN110555PHO	19020889		22SI	12	150	Pad
LEECE NEVILLE	ZLN2670LC	19020310		22SI	12	150	J180 Hinge

Alternator Index By Cross Reference

CROSS REFERENCE	Part number	Delco Remy Replacement		Family	Volts	Amps	Mounting
		Service	Reman				
LEECE NEVILLE	ZLN2676LC	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	ZLN2713LC	19020310		22SI	12	150	J180 Hinge
LEECE NEVILLE	ZLN2802LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	ZLN2824LC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	ZLN2913JC	8600308		28SI	12	160	J180 Long Hinge
LEECE NEVILLE	ZLN339142RM	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLN4830LC	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	ZLN4832LCH	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	ZLN4833LGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	ZLN4834LC	8600311		28SI	12	180	J180 Long Hinge
LEECE NEVILLE	ZLN4836LGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	ZLN4868JGH	8600307		28SI	12	200	J180 Long Hinge
LEECE NEVILLE	ZLN4923PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	ZLN4939PGH	8600314		28SI	12	200	Pad
LEECE NEVILLE	ZLN4947PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLN4948PA	8600314		28SI	12	200	Pad
PRESTOLITE	ZLN4949PAH	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLN4949PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLN4951PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	ZLN4959PA	8600338		40SI	12	240	Pad
LEECE NEVILLE	ZLN4962PAH	8600628		40SI	12	320	Pad
LEECE NEVILLE	ZLN4967PGH	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLN4993PA	8600094		40SI	12	275	Pad
LEECE NEVILLE	ZLNA0014912PGH	8600628		40SI	12	320	Pad
LEECE NEVILLE	ZLNA0014951PAH	8600314		28SI	12	200	Pad
LEECE NEVILLE	ZLNAV1160P2003	8600338		40SI	12	240	Pad
LEECE NEVILLE	ZLNAV1160P2007	8600314/8600707		28SI/38SI	12	200/215	Pad
LEECE NEVILLE	ZLNAV1555P	8600315/8600316		28SI	12	160/180	Pad
LEECE NEVILLE	ZLNBLP2309H	8600127		36SI	12	170	Pad
LEECE NEVILLE	ZLNBLP2334GH	8600316		28SI	12	180	Pad

delcoremy.com 电子目录， 支持您准确查询。

Part Number Search Application Search Family Search Service Parts Search

Contains

- This search has the ability to cross Delco Remy, Remy, and competitor part numbers.
- The part number entered will be stripped of spaces, dashes, and special characters.
- This is a wildcard search that requires at least four characters to be entered.

Part Number Search Application Search Family Search Service Parts Search

Starter Alternator [Clear Filters](#)

Make: Year: Model:

Engine Manufacturer: Engine Model: New / Reman: [Not finding your application?](#)

Part Number Search Application Search Family Search Service Parts Search

Starter Alternator [Clear Filters](#)

Family: New / Reman: Voltage: Mount Type:

Pinion Teeth: Pinion Pitch: Rated Power (kW):

[Advanced Search](#) ^

Solenoid Position: Rotation: Polarity: Over Crank Protection (OCP):

Hide Obsolete

Part Number Search Application Search Family Search Service Parts Search

Find Service Parts by Part Number

Part Number

Find Service Parts by Product Family

Starter Alternator

Family:

关键识别

资料下载

说明图表

LOGO标识

序列表

启发电机视频

技术视频

培训和技术支持

质保



更多细节敬请关注 www.delcoremy.com